


HCM Series Horizontal Multistage Pumps are a must for higher pressure applications with a quiet and reliable operation. They come with a tough construction, IP 55 rated motors and stainless steel chambers, impellers and motor shaft. The HCM series are AS4020 Certified for potable water applications and are available in 4 – 6 stage models making them ideal for pumping water in residential, commercial and industrial applications.

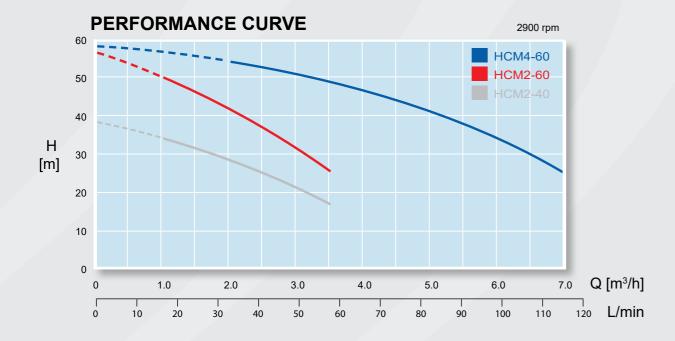

HCM2-40 | HCM2-60 | HCM4-60

APPLICATION


- Household water supply & irrigation
- Rainwater tank pumpset
- Water transfer
- Pressure boosting

FEATURES

- Automatic pressure controller
- Run dry protection
- · Quiet operation

CONSTRUCTION

- · Stainless steel impellers, chambers & shaft
- NBR carbon / ceramic mechanical seal
- IP55 motor
- Insulation class F
- · Heavy duty brass coupling

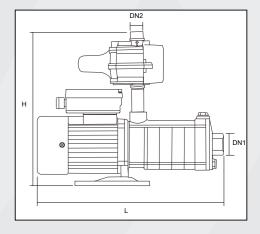

DIMENSIONS

| | Size (mm) | | DN1 | DN2 | G.W |
|------------|-----------|-----|-----|-----|------|
| Pump Model | Н | L | | | (KG) |
| HCM2-40 | 385 | 360 | 25F | 25M | 13.7 |
| HCM2-60 | 385 | 395 | 25F | 25M | 15.1 |
| HCM4-60 | 380 | 443 | 32F | 25M | 17 |

TECHNICAL DATA

| Pump Model | Power (P2) (kW) | Amps (A) | Max. FLOW (L/min) | Max. HEAD (m) | Inlet/Outlet | Water Temp |
|------------|-----------------|----------|-------------------|---------------|--------------------------------------|------------|
| HCM2-40 | 0.55 | 4.2 | 58 | 38 | 1" x 1" | 0-70°C |
| HCM2-60 | 0.75 | 5.2 | 58 | 56 | 1" x 1" | 0-70°C |
| HCM4-60 | 1.1 | 6.8 | 116 | 58 | 1 ¹ / ₄ " x 1" | 0-70°C |

