

The background of the cover is a photograph of a rural landscape at sunset. The sun is low on the horizon, casting a warm, golden glow over the scene. In the foreground, there is a field of tall, green grasses with golden seed heads. In the middle ground, there is a line of trees and a building with a blue corrugated metal roof. The sky is filled with soft, white clouds.

Product Guide 2021 - 2022

Why Choose Polymaster?

The Polymaster difference; Top grade materials, products that are trialed and tested at every point during the design and manufacturing process, backed up with global quality and process certifications. – This is just the starting point of our promise of quality.



Messaging Service

Know where your tank is and when to expect its delivery



Custom Tank Builder

Industry leading technology to put you in control of your tank building journey



Delivery

Large fleet, fast turn around times & free to many sites. See Delivery & Installation for full details - page 68



Quality Assurance

Polymaster only produces quality products and service, certifying us for the International Standard ISO9001 for quality management



Reliability

Our drivers take pride in getting our tanks exactly where you want them, when you need them



Sourcing Locally

Australian owned & operated since 1994



Find your closest store

Use our online store locator to find your nearest Polymaster retailer.





CREATE YOUR PERFECT MATCH

BUILD YOUR OWN TANK

Customise your water tank to suit your style and needs with our easy to use 3D Tank Builder.

Rotate your tank to see it from any angle, position your fittings, change the colours, and add on accessories.

See your selections change in real time.



Imagine taking control and building your own personal water tank!

Well... we're putting you in the driver's seat, so you control the build of your next tank. We have made it easy for you with our innovative and intuitive 3D modelling software. You can now quickly get 'up close & personal' with your tank online. Through our specialised software, you can now see your tank, look at it from every angle,

change its colours, position all your fittings and even add-on critical accessories that will keep your water fresh and clean.

And, when you've created your masterpiece you can download the exact specifications of your tank including a colour image of it and its cost. How cool is that? It's so easy!




It's online, and it's FREE at polymaster.com.au



Tanks

| | |
|--|----|
| Premium Round Rainwater Tanks | 10 |
| Polychoice Round Rainwater Tanks | 12 |
| Builders Tank & Pump Packages | 13 |
| Premium Slimline Tanks & Pump Options | 14 |
| Polychoice Slimline Tanks & Pump Options | 16 |
| Underground Tanks | 18 |
| Septic Tanks | 19 |
| Pipeline Tanks | 20 |
| Molasses Tanks | 21 |
| Fertiliser & Fertigation | 22 |
| Aquaculture | 23 |
| Tanks Accessories | 23 |
| Pumps | 26 |

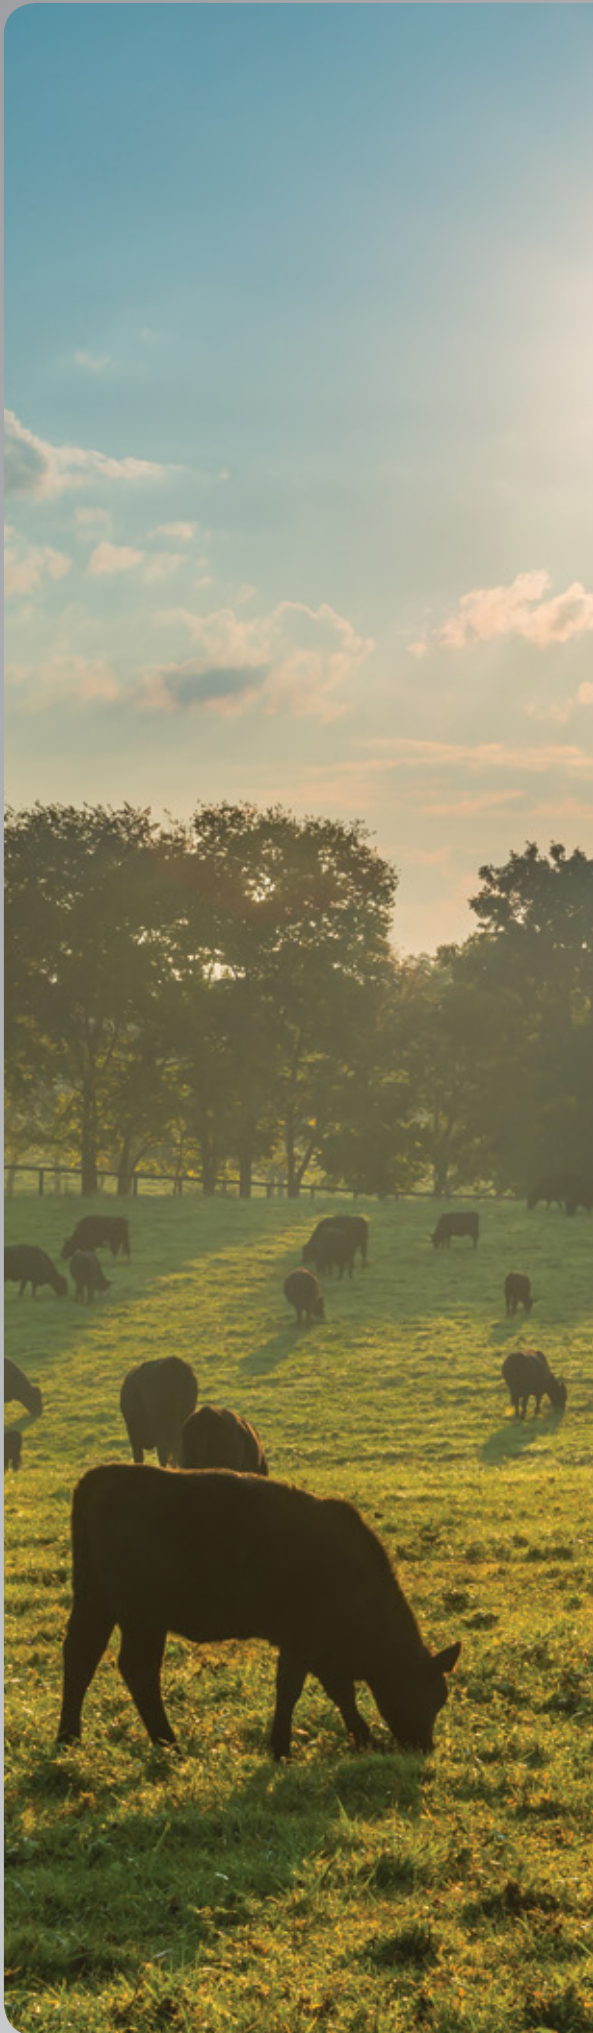

Agriculture

| | |
|----------------------------------|-----------|
| Stock Troughs & Tanks | 28 |
| Round Water Troughs | 29 |
| Stock Water Tank & Troughs | 30 |
| Long Water Troughs | 31 |
| Polychoice Troughs | 33 |
| Feed Troughs | 34 |
| Footrot Baths | 35 |
| Trough Spares | 36 |
| Feeders & Drinkers | 37 |
| Grain Feeders & Accessories | 37 |
| Calf Milk Feeders | 38 |
| Lamb Milk Feeders | 39 |
| Mobile Gravity Milk Feeders | 40 |
| Fence & Stable Drinkers | 41 |
| Teats & Accessories | 42 |
| Farm Storage Equipment | 43 |
| Feed Storage Bins | 43 |
| Buckets & Scoops | 43 |
| Dog Houses | 44 |
| Tractor Roofs | 44 |
| Food Grade Produce Liners & Bins | 45 |
| Bulk Storage | 46 |
| Silomaster | 47 |
| Silomaster Large Capacity | 48 |
| Vehicle Storage | 49 |



Agriculture

| | |
|--|-----------|
| Diesel Tanks & Ute Packs | 50 |
| Diesel Ute Packs | 50 |
| Diesel Transfer Tanks | 51 |
| Trailer Packages | 52 |
| Diesel Single Skin Smooth Wall Tanks | 53 |
| Diesel Self Bunded Tanks | 54 |
| Diesel Dispensing Units | 56 |
| Diesel Pumps & Accessories | 57 |
| Smart Diesel Dispensing | 58 |
| <hr/> | |
| AdBlue® Tanks & Ute Packs | 60 |
| AdBlue® Storage | 60 |
| <hr/> | |
| Fire Fighting & Water Cartage | 61 |
| Water Cartage | 61 |
| Compact Fire Fighting Packages | 62 |
| Skid Mounted Packages | 63 |
| Trailer Packages | 64 |
| Water Cartage & Fire Fighting Pumps | 65 |
| <hr/> | |
| Safety & Spill Containment | 66 |
| <hr/> | |
| Order Form | 67 |
| <hr/> | |
| Delivery & Installation | 68 |
| <hr/> | |
| Index | 69 |

Tank Categories

Browse our Tank solutions

| | | | |
|--|--|--|---|
| <p>Page 10</p>  <p>Premium Round Rainwater Tanks</p> | <p>Page 12</p>  <p>Polychoice Round Rainwater Tanks</p> | <p>Page 13</p>  <p>Builders Tank & Pump Packages</p> | <p>Page 14</p>  <p>Premium Slimline Tanks & Pump Options</p> |
| <p>Page 18</p>  <p>Underground Tanks</p> | <p>Page 19</p>  <p>Septic Tanks</p> | <p>Page 20</p>  <p>Pipeline Tanks</p> | <p>Page 21</p>  <p>Molasses Tanks</p> |
| <p>Page 22</p>  <p>Fertiliser & Fertigation</p> | <p>Page 23</p>  <p>Aquaculture</p> | <p>Page 23</p>  <p>Tank Accessories</p> | <p>Page 26</p>  <p>Pumps</p> |

Why Buy Polymaster Rainwater Tanks



Product Certification

Built to the Rainwater tank Standard AS/NZS 4766:2006 for peace of mind. Licence no. BMP657671 & BMP650824



Fittings Standard

Rainwater Tanks come standard with fittings. Ask us what fittings come with the tank model you are interested in



UV+ Double Strength

Our exclusive UV+ double strength resin gives the best protection against Australia's harsh sun



One Piece Tank Construction

With no joins or seams, our new generation roof design eliminates the need for an internal support pole



Food Grade

Our tanks are made from food-grade polyethylene and certified to AS/NZS4020, the Australian Standard for drinking water



BPA Free

For your peace of mind



Quality Assurance

Polymaster only produces quality products and service, certifying us for the international standard for quality management ISO9001



Made in Australia

Family-owned and operated in Australia since 1994



Extra Thick Walls

Each Polymaster tank undergoes ultrasonic thickness testing and impact testing to ensure material is correct thickness



Tank Builder

Customise your water tank to suit your style and needs with our easy to use 3D Tank Builder



Tank Colours

The Standard Range

With so many choices of Colorbond® matched hues, we've made it easy to perfectly blend your new tank with your new home or surroundings. Our Standard Range takes the guesswork out of matching your tank colour with your exterior walls, guttering or roofing. No wonder this range is an Australian favourite.



The Optional Range

If you're looking for even more colour choices, you'll find other exciting Colorbond® shades in our Optional Range. With a little extra imagination you can create a striking visual look in any outdoor space by choosing either a contrasting or complementary colour match.



Contact us to discuss your colour project on **1800 062 064**

Colours are shown for illustrative purposes only and may vary. Polymaster will not be held liable for incorrect colour impressions. Request your Polymaster colour sample to view colours. *COLORBOND® and colour names are registered trademarks of Blue Scope Steel Ltd.™ Polymaster tank colours represented match COLORBOND® steel colours. As we process our own resin we are able to offer a vast range of custom colours, available at an additional cost.

Rainwater Tanks

Premium Round Water Tanks




| CODE | PROFILE | CAPACITY (Litres) | DIAMETER | OVERALL HEIGHT | INLET HEIGHT |
|------------|------------|-------------------|----------|----------------|--------------|
| RWT200 | Corrugated | 200 | 600 | 900 | 900 |
| RWT600 | Corrugated | 600 | 1000 | 950 | 950 |
| RWT1000 | Corrugated | 1,000 | 1000 | 1500 | 1500 |
| RWT1600 | Corrugated | 1,600 | 1250 | 1610 | 1500 |
| RWT2270T* | Corrugated | 2,270 | 1300 | 2000 | 1920 |
| RWT2270LP* | Corrugated | 2,270 | 1700 | 1310 | 1200 |
| RWT3300 | Corrugated | 3,300 | 1520 | 2100 | 2000 |
| RWT4500T* | Corrugated | 4,500 | 1700 | 2200 | 2100 |
| RWT4500LP* | Corrugated | 4,500 | 2150 | 1580 | 1380 |
| RWT5000 | Corrugated | 5,000 | 1950 | 2170 | 1960 |
| RWT7100 | Corrugated | 7,100 | 2150 | 2300 | 2120 |
| RWT9000 | Corrugated | 9,000 | 2500 | 2260 | 2050 |
| RWT13600 | Corrugated | 13,600 | 3100 | 2450 | 2100 |
| RWT22500 | Corrugated | 22,500 | 3560 | 2800 | 2470 |
| RWT31700 | Corrugated | 31,700 | 4100 | 3040 | 2610 |
| RWT50KL | Smooth | 50,000 | 4600 | 3440 | 3290 |

*T = Tall
*LP = Low Profile




| CODE | STRAINER (Position) | STRAINER (Size) | OVERFLOW (Alternative) | OUTLET* (Std Position) | OUTLET SIZE | UPGRADE BALL VALVE & OUTLET | MANHOLE COVER & STRAINER |
|-----------|---------------------|-----------------|--------------------------|------------------------|-------------|---------------------------------------|--------------------------------------|
| RWT200 | Centre | 200 | 12 | 6 | 25 | 40 - BV1.5A 50 - BV2A | Manhole - MHC6 Strainer - S2 |
| RWT600 | Centre | 200 | 12 | 6 | 25 | 40 - BV1.5A 50 - BV2A | Manhole - MHC6 Strainer - S2 |
| RWT1000 | Centre | 200 | 12 | 6 | 25 | 40 - BV1.5A 50 - BV2A | Manhole - MHC6 Strainer - S2 |
| RWT1600 | 12 | 300 | 11/4 | 6 | 25 | 40 - BV1.5A 50 - BV2A | Manhole - MHC5 Strainer - S3 |
| RWT2270T | 12 | 300 | 11/5 | 6 | 25 | 40 - BV1.5A 50 - BV2A | Manhole - MHC5 Strainer - S3 |
| RWT2270LP | 12 | 400 | 11/4 | 6 | 25 | 40 - BV1.5A 50 - BV2A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT3300 | 12 | 300 | 11/4 | 6 | 25 | 40 - BV1.5A 50 - BV2A | Manhole - MHC5 Strainer - S3 |
| RWT4500T | 12 | 400 | 11/4 | 6 | 25 | 40 - BV1.5A 50 - BV2A 80 - BV3A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT4500LP | 12 | 400 | 11/3/7 | 6 | 25 | 40 - BV1.5A 50 - BV2A 80 - BV3A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT5000 | 12 | 400 | 11/3/7 | 6 | 25 | 40 - BV1.5A 50 - BV2A 80 - BV3A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT7100 | 12 | 400 | 11/3/7 | 6 | 40 | 50 - BV2A 80 - BV3A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT9000 | 12 | 400 | 11.30/2.30/ 5.30/8.30 | 6 | 40 | 50 - BV2A 80 - BV3A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT13600 | 12 | 400 | 11/2/5/8 | 4 | 40 | 50 - BV2A 80 - BV3A 100 - BV4A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT22500 | 12 | 400 | 11.30/2.30/ 5.30/8.30 | 4 | 40 | 50 - BV2A 80 - BV3A 100 - BV4A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT31700 | 12 | 400 | 11.30/2.30/ 5.30/8.30 | 4 | 40 | 50 - BV2A 80 - BV3A 100 - BV4A | Manhole - MHC3/MHC4 Strainer - S4 |
| RWT50KL | 12/6 | 500 | 2/4/6/8/10/12 | 4 | 40 | 50 - BV2A 80 - BV3A 100 - BV4A | Manhole - MHCA Strainer - S5 |

DIMENSIONS

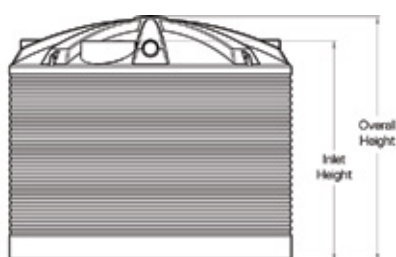

Fit Out Clock

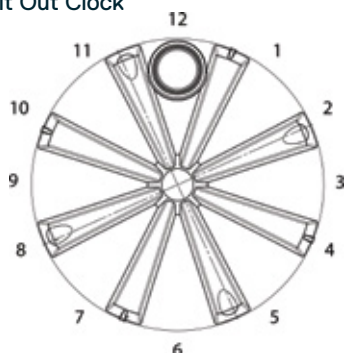

Refer to table for strainer, overflow and outlet positions available for each tank size.

KEY FEATURES

- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Solid brass threaded outlet & ball valve as standard
- *Outlet location can be moved from standard based on positions on the Fit Out Clock
- Upgraded outlet and ball valves are additional cost
- Replacement manhole covers and strainers available
- Available in 22 Colorbond Colours
- 90mm overflow

Strainer



Outlet & Ball Valve



Overflow



CREATE YOUR PERFECT MATCH

BUILD YOUR OWN TANK



You can change location of the outlet and overflow with our new 3D Tank Builder

Rainwater Tanks


Polychoice Round Water Tanks




| CODE | PROFILE | CAPACITY (Litres) | DIAMETER | OVERALL HEIGHT | INLET HEIGHT |
|----------|---------|-------------------|----------|----------------|--------------|
| PCR2000 | Smooth | 2,000 | 1175 | 2255 | 2185 |
| PCR4000 | Smooth | 4,000 | 1600 | 2200 | 2150 |
| PCR5000 | Smooth | 5,000 | 1800 | 2200 | 2120 |
| PCR7000 | Smooth | 7,000 | 2200 | 2200 | 2020 |
| PCR10000 | Smooth | 10,000 | 2480 | 2350 | 2170 |
| PCR13500 | Smooth | 13,500 | 2830 | 2630 | 2470 |
| PCR22500 | Smooth | 22,500 | 3573 | 2879 | 2559 |
| PCR27000 | Smooth | 27,000 | 3573 | 3339 | 3019 |

| CODE | STRAINER (Position) | STRAINER (Size) | OVERFLOW (Alternative) | *OUTLET (Std Position) | OUTLET SIZE | UPGRADE OUTLET | MANHOLE COVER & STRAINER |
|----------|---------------------|-----------------|-------------------------|------------------------|-------------|--------------------------------------|---------------------------------|
| PCR2000 | 12 | 300 | 10.30, 1.30, 4.30, 7.30 | 6 | 25 | 40 - LHO1.5 50 - LHO2 | Manhole - MHC6 Strainer - S3 |
| PCR4000 | 12 | 400 | 10.30, 1.30, 4.30, 7.30 | 6 | 25 | 40 - LHO1.5 50 - LHO2 | Manhole - MHC7 Strainer - S4 |
| PCR5000 | 12 | 400 | 10.30, 1.30, 4.30, 7.30 | 6 | 25 | 40 - LHO1.5 50 - LHO2 | Manhole - MHC7 Strainer - S4 |
| PCR7000 | 12 | 400 | 10.30, 1.30, 4.30, 7.30 | 6 | 25 | 40 - LHO1.5 50 - LHO2 | Manhole - MHC7 Strainer - S4 |
| PCR10000 | 12 | 400 | 10.30, 1.30, 4.30, 7.30 | 6 | 40 | 50 - LHO2 80 - LHO3 100 - LHO4 | Manhole - MHCA Strainer - S4 |
| PCR13500 | 12 | 400 | 10.30, 1.30, 4.30, 7.30 | 6 | 40 | 50 - LHO2 80 - LHO3 100 - LHO4 | Manhole - MHCA Strainer - S4 |
| PCR22500 | 12 | 500 | 10.30, 1.30, 4.30, 7.30 | 6 | 40 | 50 - LHO2 80 - LHO3 100 - LHO4 | Manhole - MHCA Strainer - S5 |
| PCR27000 | 12 | 500 | 10.30, 1.30, 4.30, 7.30 | 6 | 40 | 50 - LHO2 80 - LHO3 100 - LHO4 | Manhole - MHCA Strainer - S5 |

DIMENSIONS

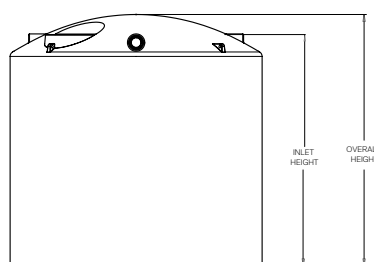

Fit Out Clock



KEY FEATURES

- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Solid brass threaded outlet as standard
- *Outlet location can be moved from standard based on positions on the Fit Out Clock
- Upgraded outlet and ball valves are additional cost
- Replacement manhole covers and strainers available
- Available in 22 Standard Colorbond colours

Refer to table for strainer, overflow and outlet positions available for each tank size.



Slimline Tanks

Builders Tank & Pump Packages



| CODE | PUMP CAPABILITY | CAPACITY (Litres) | PUMP CODE | LENGTH | WIDTH | HEIGHT | INLET HEIGHT | OUTLET (Position) | OUTLET SIZE |
|------------|-------------------------|-------------------|-----------|--------|-------|--------|--------------|-------------------|-------------|
| BSLT2020H4 | Single Storey Dwellings | 2,020 | MHR20-370 | 2105 | 735 | 2010 | 2010 | 6&12 | 25 |
| BSLT2020H5 | Double Storey Dwellings | 2,020 | MHR20-550 | 2105 | 735 | 2010 | 2010 | 6&12 | 25 |

Accessories

| CODE | DESCRIPTION |
|------------|-------------------------|
| BSLT2020PC | Pump Cover for BLST2020 |
| MHC8 | Inspection Cover 400mm |
| S4 | Inlet Strainer 400mm |

PUMP INFORMATION


Automatic hydraulic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

*Refer to Page 26 & 27 for Pump Details.

KEY FEATURES

- 10 minute quick install - pump built in, just hook it up
- Moulded handgrips for easy lifting
- 2 x 90mm overflows + 1 cap
- 2 x outlets + 1 cap
- Flexhose 20mm x 600mm Female thread
- Hoses for connection at approximately 400mm high
- Available in 22 Standard Colorbond colours
- Fits through a standard doorway

DIMENSIONS

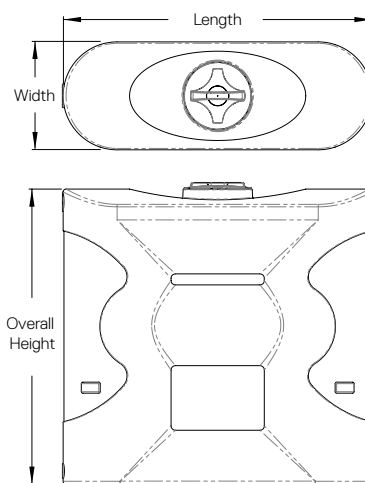

CREATE YOUR PERFECT MATCH

BUILD YOUR OWN TANK

You can change location of the outlet and overflow with our new 3D Tank Builder

Premium Slimline Tanks & Pump Options



Tank Only

| CODE | CAPACITY (Litres) | LENGTH | WIDTH | INLET HEIGHT |
|----------|-------------------|--------|-------|--------------|
| SLST600 | 600 | 1220 | 580 | 1265 |
| SLST1050 | 1,050 | 1460 | 690 | 1515 |
| SLST2000 | 2,000 | 2370 | 600 | 2010 |
| SLST3000 | 3,000 | 2570 | 790 | 2050 |
| SLST5000 | 5,000 | 3290 | 1020 | 2010 |

| CODE | STRAINER (Position) | STRAINER (Size) | OVERFLOW POSITION | OUTLET POSITION | OUTLET SIZE | BALL VALVE & OUTLET UPGRADE | MANHOLE COVER & STRAINER |
|----------|---------------------|-----------------|---------------------|---------------------|-------------|--|---|
| SLST600 | 6 Std/12 Alt | 300 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC9 Strainer - S3 |
| SLST1050 | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST2000 | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST3000 | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST5000 | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A 50mm - BV2A | Manhole Cover - MHC8 Strainer - S4 |

Tank & Submersible Pump System

| CODE | CAPACITY (Litres) | LENGTH | WIDTH | INLET HEIGHT | PUMP CODE |
|------------|-------------------|--------|-------|--------------|-------------|
| SLST1050AP | 1,050 | 1460 | 690 | 1515 | HHR-370S-PC |
| SLST2000AP | 2,000 | 2370 | 600 | 2010 | HHR-370S-PC |
| SLST3000AP | 3,000 | 2570 | 790 | 2050 | HHR-370S-PC |
| SLST5000AP | 5,000 | 3290 | 1020 | 2010 | HHR-370S-PC |

| CODE | STRAINER (Position) | STRAINER (Size) | OVERFLOW POSITION | OUTLET POSITION | OUTLET SIZE | BALL VALVE & OUTLET UPGRADE | MANHOLE COVER & STRAINER |
|------------|---------------------|-----------------|---------------------|---------------------|-------------|--|---|
| SLST1050AP | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST2000AP | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST3000AP | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST5000AP | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A 50mm - BV2A | Manhole Cover - MHC8 Strainer - S4 |

**CREATE YOUR
PERFECT MATCH**
BUILD YOUR OWN TANK




You can change location of the outlet and overflow with our new 3D Tank Builder

Tank & Garden Pump System

| CODE | CAPACITY (Litres) | LENGTH | WIDTH | INLET HEIGHT | PUMP CODE | PUMP COVER SUPPLIED |
|-------------|-------------------|--------|-------|--------------|-----------|---------------------|
| SLST1050GPS | 1,050 | 1460 | 690 | 1515 | DHJ600 | PC01 |
| SLST2000GPS | 2,000 | 2370 | 600 | 2010 | DHJ600 | PC01 |
| SLST3000GPS | 3,000 | 2570 | 790 | 2050 | DHJ600 | PC01 |
| SLST5000GPS | 5,000 | 3290 | 1020 | 2010 | DHJ600 | PC01 |

| CODE | STRAINER (Position) | STRAINER (Size) | OVERFLOW POSITION | OUTLET POSITION | OUTLET SIZE | BALL VALVE & OUTLET UPGRADE | MANHOLE COVER & STRAINER |
|-------------|---------------------|-----------------|-------------------|-----------------|-------------|---|---|
| SLST1050GPS | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST2000GPS | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST3000GPS | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5A | Manhole Cover - MHC8 Strainer - S4 |
| SLST5000GPS | 6 Std/12 Alt | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40mm - BV1.5 50mm - BV2A | Manhole Cover - MHC8 Strainer - S4 |

DIMENSIONS

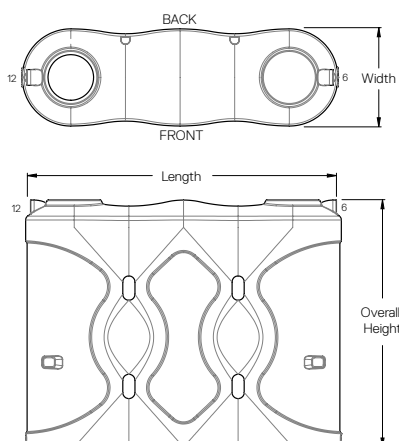

PUMP INFORMATION

Automatic hydraulic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

*Refer to pages 26 & 27 for Pump Details



KEY FEATURES

- Space saving modern design
- Moulded handgrips for easy lifting
- 90mm overflow
- 25mm Solid Brass outlet
- Ball valve as standard
- Available in 22 Colorbond Colours



Polychoice Slimline Tanks & Pump Options



Tank Only

| CODE | CAPACITY (Litres) | LENGTH | WIDTH | INLET HEIGHT |
|----------|-------------------|--------|-------|--------------|
| PCST2000 | 2,000 | 2370 | 600 | 2010 |
| PCST3000 | 3,000 | 2570 | 790 | 2050 |

| CODE | STRAINER (Position) | STRAINER (Size) | OVERFLOW POSITION | OUTLET POSITION | OUTLET SIZE | OUTLET UPGRADE | MANHOLE COVER & STRAINER |
|----------|---------------------|-----------------|-------------------|-----------------|-------------|----------------|---|
| PCST2000 | 6 & 12 | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40 - LHO1.5 | Manhole Cover - MHC8 Strainer - S4 |
| PCST3000 | 6 & 12 | 400 | 12 Std/6 Alt | 6 Std/12 Alt | 25 | 40 - LHO1.5 | Manhole Cover - MHC8 Strainer - S4 |

Tank & Submersible Pump System

| CODE | CAPACITY (Litres) | LENGTH | WIDTH | INLET HEIGHT | PUMP CODE |
|------------|-------------------|--------|-------|--------------|-------------|
| PCST2000AP | 2,000 | 2370 | 600 | 2010 | HHR-370S-PC |
| PCST3000AP | 3,000 | 2570 | 790 | 2050 | HHR-370S-PC |

PUMP INFORMATION



Automatic hydraulic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

* Refer to pages 26 & 27 for Pump Details

KEY FEATURES

- Space saving modern design
- Moulded handgrips for easy lifting
- 90mm overflow
- 25mm Solid Brass outlet as standard
- Available in 22 Standard Colorbond colours

DIMENSIONS

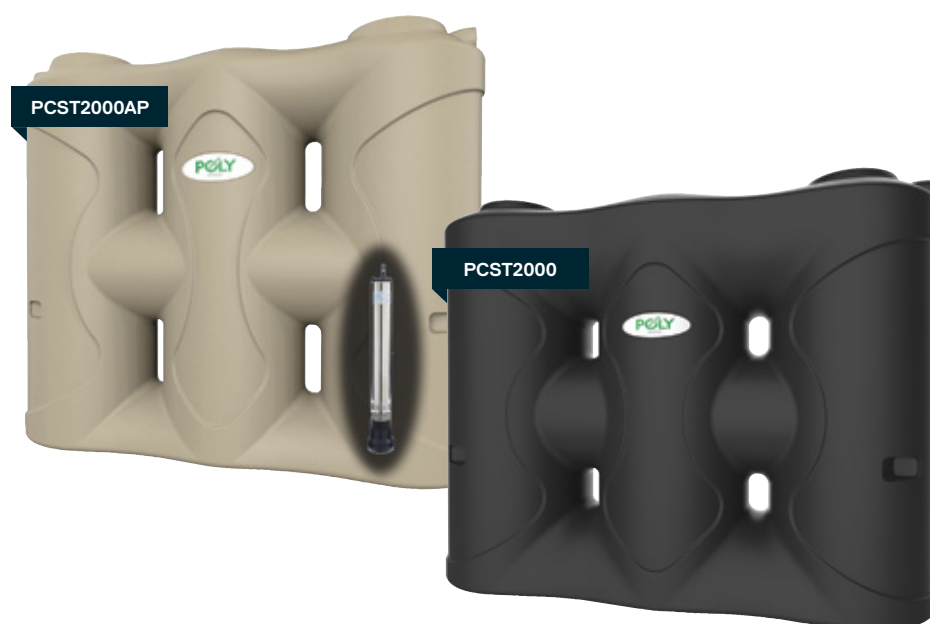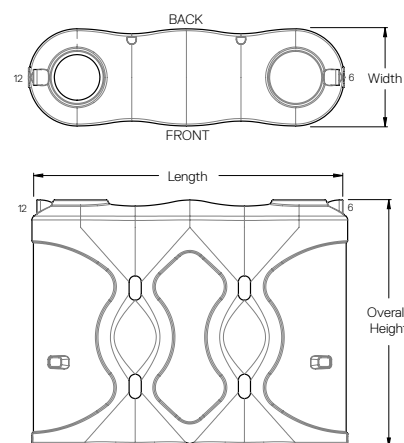

Retention & Detention

What are Retention - Detention tanks?

Retention and Detention tanks are often prescribed by councils and government bodies to control the release of water into the stormwater system.

All Polymaster above-ground rainwater tanks (round or slim) can be adapted to meet your retention or detention needs.

Why is it important?

Urban drainage systems are under more and more pressure. Due to urbanisation, storm water systems handle more water as there's more rain falling on roofs and paved areas instead of naturally draining into water ways and the water table.

By installing a Polymaster Retention or Detention tank in subdivisions and urban areas, you can both protect the drainage system and comply with local council regulations.

Controlled release outlets

Polymaster offer a wide range of specialised outlets for this purpose.

Water release is restricted by outlet size and / or orifice plate, usually specified by your local council.


Detention function

In the event of heavy rainfall the upper portion of tank temporarily contains the water surge.

This process is known as stormwater detention and takes the pressure off municipal stormwater systems with this water being slowly released through a small outlet.

Retention function

The lower portion of this tank functions simply to retain a sustainable supply of rainwater for household or garden use.

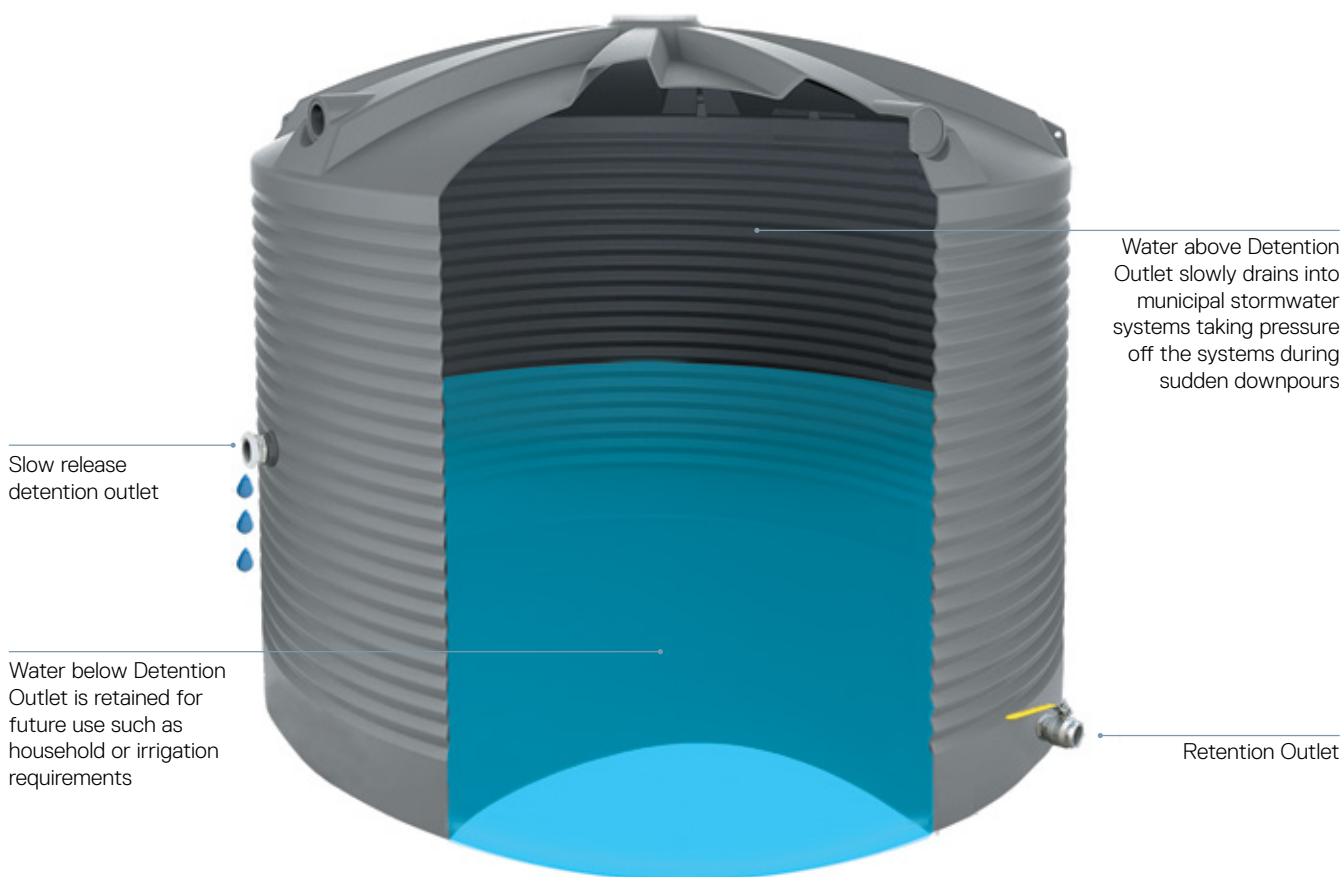

Underground Tanks



| CODE | DESCRIPTION | CAPACITY (Litres) | LENGTH | WIDTH | HEIGHT | OUTLET SIZE |
|--------------|--|-------------------|--------|-------|--------|-------------|
| URT3300B | Tank Only | 3,300 | 2450 | 1640 | 1665 | 32mm BSPF |
| URT5000B | Tank Only | 5,000 | 3520 | 1640 | 1665 | 32mm BSPF |
| URT3300VF | Tank with Vortex Filter | 3,300 | 2450 | 1640 | 1665 | 32mm BSPF |
| URT5000VF | Tank with Vortex Filter | 5,000 | 3520 | 1640 | 1665 | 32mm BSPF |
| URT3300VF/PC | Tank with Vortex Filter inc submersible pump & automatic changeover device | 3,300 | 2450 | 1640 | 1665 | 32mm BSPF |
| URT5000VF/PC | Tank with Vortex Filter inc submersible pump & automatic changeover device | 5,000 | 3520 | 1640 | 1665 | 32mm BSPF |
| URT3300VF/GP | Tank with Vortex Filter & garden pump with press control | 3,300 | 2450 | 1640 | 1665 | 32mm BSPF |
| URT5000VF/GP | Tank with Vortex Filter & garden pump with press control | 5,000 | 3520 | 1640 | 1665 | 32mm BSPF |

Pump Details

| TYPE | VOLTAGE | POWER (kW) | HEAD | FLOW | INLET | OUTLET | WARRANTY |
|-----------------------|----------|--------------------|------|--------|-----------|-----------|----------|
| Submersible Pump (PC) | 220-240v | 0.75kW (750 watts) | 36m | 115LPM | 20mm BSPM | 20mm BSPM | 2 years |
| Garden Pump (GP) | 220-240v | 0.37kW (370 watts) | 36m | 82LPM | | 25mm BSPF | 2 years |


Accessories

| CODE | ACCESSORIES |
|------|---|
| URRM | 500mm Riser - for deeper installations |
| UMFO | Multifunctional backflow prevention valve |
| URTL | Lid to suit Underground Tanks |

VORTEX FINE FILTER

Self cleaning filter removes sediment and debris, providing you with clean water for storage. Wall mounting bracket available.


Example Setup Underground Tank with Vortex Filter and Submersible Pump options

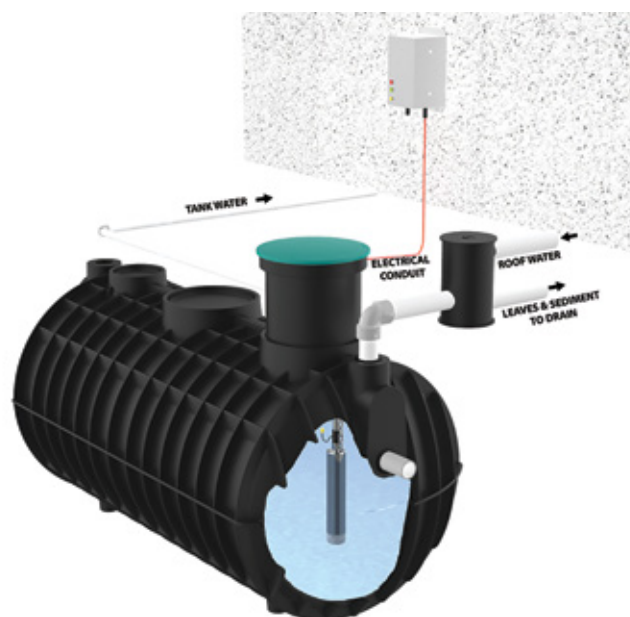

KEY FEATURES

- Child-proof lid secured with tamper proof screws
- Self-anchoring
- Low profile design - minimal excavation required
- Uni Seals supplied
- Tank to tank connection point

DIMENSIONS

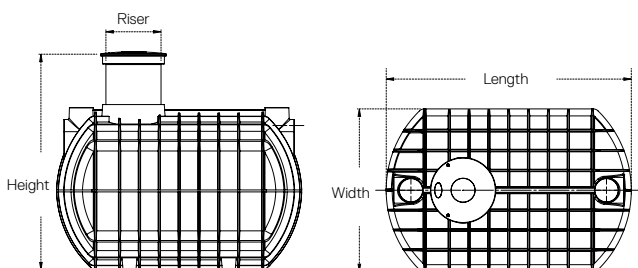

Septic Tanks





| CODE | DESCRIPTION | CAPACITY (Litres) | LENGTH | WIDTH | HEIGHT | INLET SIZE | OUTLET SIZE | NO. OF PERSONS |
|--------|-------------|-------------------|--------|-------|--------|------------|-------------|----------------|
| ST3100 | Septic Tank | 3,100 | 2450 | 1640 | 1665 | 100 | 100 | 1-5 people |
| ST4550 | Septic Tank | 4,550 | 3520 | 1640 | 1665 | 100 | 100 | 6-10 people |

Accessories


| CODE | ACCESSORIES |
|----------|--|
| URRM | 500mm Riser - for deeper installations |
| STLIDHGR | Lid to suit Septic Tank |

| KEY FEATURES |
|--|
| <ul style="list-style-type: none"> Self anchoring - does not require concrete Fittings and baffle pre-installed Certified for NSW, VIC, SA 10 minute hook up |
| <ul style="list-style-type: none"> Low profile design - minimal excavation required One piece construction 100mm inlet and outlet preinstalled Heavy duty lid tested to 500kg loading 500mm riser extension available |

DIMENSIONS

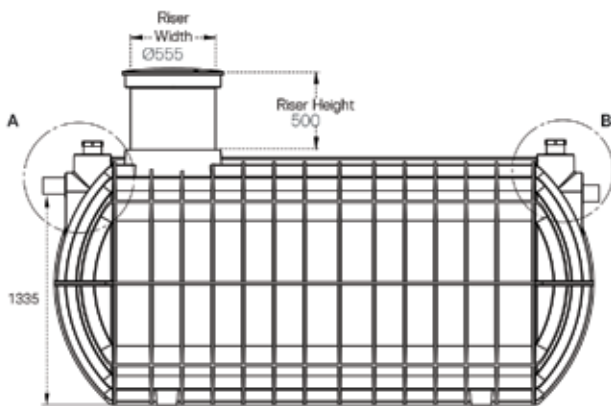

DETAIL A (INLET)



DETAIL B (OUTLET)



Pipeline Tanks



| CODE | CAPACITY (Litres) | DIAMETER | INLET HEIGHT | OVERALL HEIGHT | OVERFLOW SIZE | INLET / OUTLET SIZE |
|----------|-------------------|----------|--------------|----------------|---------------|---------------------|
| PLT9000 | 9,000 | 2500 | 2050 | 2260 | 90 | 32+50 |
| PLT13600 | 13,600 | 3100 | 2100 | 2450 | 90 | 32+50 |
| PLT22500 | 22,500 | 3560 | 2470 | 2800 | 90 | 32+50 |
| PLT31700 | 31,700 | 4100 | 2610 | 3040 | 90 | 32+50 |
| PLT50KL | 50,000 | 4600 | 3290 | 3440 | 90 | 32+50 |

KEY FEATURES


- Inspection cover
- 90mm overflow/breather & screen
- AFV2LB 32mm brass fitting and 25mm poly float
- 50mm outlet and ball valve

STANDARD FITTINGS AND LOCATIONS


| | |
|-------|--------------------------------|
| 12:00 | Inspection Cover |
| 2:30 | Breather /Overflow |
| 4:00 | 50mm Brass Outlet & Ball Valve |
| 11:30 | Fitting & Float Valve |

* Pipeline fittings pg 25.

DIMENSIONS

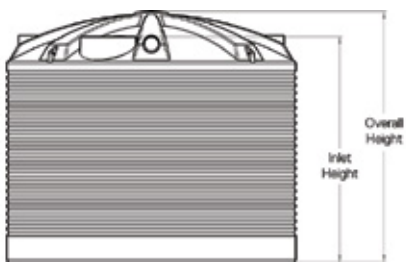

Fit Out Clock



Refer to table for strainer, overflow and outlet positions available for each tank size.

Made to Order -
Call us today to discuss your fit out and fitting options



Optional internal pipework fit out available

Molasses Storage Tanks




| CODE | PROFILE | CAPACITY (Litres) | DIAMETER | OVERALL HEIGHT | INLET HEIGHT | OVERFLOW SIZE | OUTLET SIZE |
|----------|------------|-------------------|----------|----------------|--------------|---------------|-------------|
| MOL13600 | Corrugated | 13,600 | 3100 | 2450 | 2100 | 90 | 80 |
| MOL22500 | Corrugated | 22,500 | 3560 | 2800 | 2470 | 90 | 80 |
| MOL31700 | Corrugated | 31,700 | 4100 | 3040 | 2610 | 90 | 80 |
| MOL50KL | Smooth | 50,000 | 4600 | 3440 | 3290 | 90 | 80 |


KEY FEATURES

- Heavy duty wall thickness
- Ideal for liquids up to 1.4SG
- Standard with 80mm brass outlet and inspection cover
- Fitted with overflow as breather and screen

DIMENSIONS

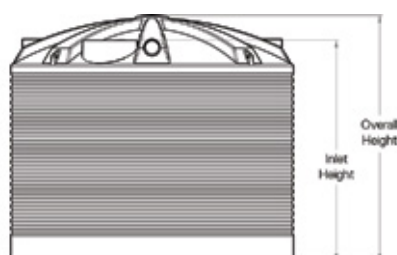

Fit Out Clock



Refer to table for strainer, overflow and outlet positions available for each tank size.



MOL31700

Liquid Fertiliser Storage

Liquid Fertiliser Storage Tanks




| CODE | CAPACITY (Litres) | DIAMETER | INLET HEIGHT | OVERALL HEIGHT | OVERFLOW SIZE | TOP FILL KIT |
|----------|-------------------|----------|--------------|----------------|---------------|--------------|
| LFT9000 | 9,000 | 2500 | 2050 | 2260 | 90 | LFTK |
| LFT13600 | 13,600 | 3100 | 2100 | 2450 | 90 | LFTK |
| LFT22500 | 22,500 | 3560 | 2470 | 2800 | 90 | LFTK |
| LFT31700 | 31,700 | 4100 | 2610 | 3040 | 90 | LFTK |
| LFT50KL | 50,000 | 4600 | 3290 | 3440 | 90 | LFTK |

KEY FEATURES

- Heavy duty construction to suit liquids up to 1.4SG
- Level indicator as standard
- Inspection cover
- Standard with 50mm Stainless Steel Outlet, Ball Valve and Camlock

DIMENSIONS

Fit Out Clock

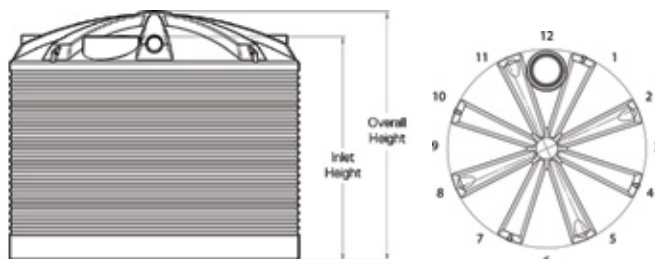

Refer to table for strainer, overflow and outlet positions available for each tank size.



LFT22500

*Pole not included

STANDARD FITTINGS AND LOCATIONS

| | |
|-------|---|
| 12:00 | Inspection Cover |
| 12:30 | 2" Stainless Steel Outlet (LH02SS) |
| 12:30 | 2" Stainless Steel Camlock (bottom fill connection) |
| 12:30 | 2" Stainless Steel Ball Valve |
| 1:30 | Liquidator - True Level Indicator (LQ01) |
| 2:30 | Breather / Overflow |

3" STAINLESS STEEL UPGRADE OPTION

- 3" Outlet (**LH03SS**)
- 3" Camlock (**SC80-F**)
- 3" Ball Valve (**SSBV3**)

Fertigation Tank + Base & Venturi Fitout



| CODE | CAPACITY | DIMENSIONS | LID |
|-----------|--|-------------------|---------|
| FT2000B+V | 2,000 ltr | 2000 DIA x 1000 H | FTL2000 |
| FT5000B+V | 5,000 ltr | 2850 DIA x 1180 H | |
| FT9000B+V | 9,000 ltr | 3500 DIA x 1280 H | |
| FTL2000 | Lid to suit 2,000 ltr Fertigation Tank | 2180 DIA | |



*Pump not included



Recommended Pump for Venturi Setup

| CODE | DESCRIPTION | ENGINE/ PUMP | POWER (HP) | HEAD | FLOW (LPM) | INLET | OUTLET | WARRANTY |
|----------|------------------------------------|-----------------|---------------|------|---------------|----------|----------|----------|
| HTP750VR | Chemical Transfer Pump Honda 6.5HP | Honda/Onga | 6.5 | 40m | 750 | 50mm NPT | 50mm NPT | 2 years |

KEY FEATURES

- No internal pipework within tank to damage fish or get in the way
- Self draining tank with integrated moulded sump connects to PVC 65mm, 100mm for 5000 & 9000 Ltr
- PVC pipe not included
- 10 degree sloping base
- 50mm Camlock with base & venturi set up
- Pumps to suit venturi system available


DIAGRAM

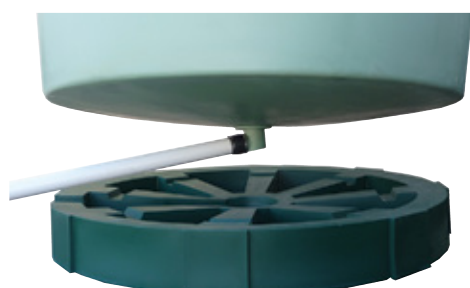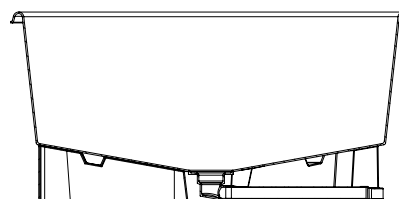

Aquaculture

Aquaculture Tanks

| CODE | DESCRIPTION | DIMENSIONS | POLY RISER | FLOOR SLOPE ANGLE | WATER CONTROLLER KIT |
|---------|--------------------------|-------------------|------------|----------------------|-------------------------|
| FT200 | 200 ltr Flat Bottom Tank | 800 DIA x 560 H | | | |
| FT500B | 500 ltr Tank + Base | 1000 DIA x 1000 H | APRS | 80mm | WCK01 |
| FT1000B | 1,000 ltr Tank + Base | 1420 DIA x 1200 H | APRS | 40mm | WCK01 |
| FT2000B | 2,000 ltr Tank + Base | 2000 DIA x 1000 H | APRS | 150mm | WCK01 |
| FT5000B | 5,000 ltr Tank + Base | 2850 DIA x 1180 H | APRS | 120mm | WCK02 |
| FT9000B | 9,000 ltr Tank + Base | 3500 DIA x 1280 H | APRS | 100mm | WCK02 |
| FTL2000 | Lid to suit 2000L Tank | 2180 DIA | | | |

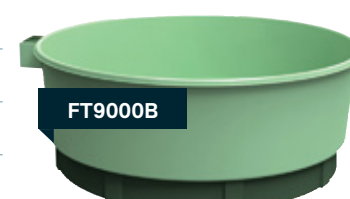

Accessories

Inspection Covers

| CODE | DESCRIPTION |
|------|--|
| MHC1 | Inspection Cover for 13,600ltr to 31,700ltr |
| MHC3 | Water Entry Cover for Tanks with 400mm Sieve |
| MHC4 | Inspection Cover for Tanks with 400mm Sieve |
| MHC5 | Inspection Cover for RWT3300, RWT2270T and RWT1600 Tanks |
| MHC6 | Inspection Cover for RWT1000, RWT600 and RWT200 |
| MHC8 | Inspection Cover for Slimline Tanks 1050, 2000, 3000 and 5000ltr |
| MHC9 | Inspection Cover for Slimline Tanks SLST600 only |
| MHCA | Manhole Cover Adapter - Black |

Water Level Indicators

| CODE | DESCRIPTION |
|---------|---|
| CLG | Clock Level Gauge |
| DPK1 | Dipstick |
| DPK1EXT | Dipstick Extension For 50KI Tank |
| LT01 | Levetator - Water Level Indicator |
| LQ01 | Liquidator - Suitable For Corrosive Liquids |

Other Rainwater Accessories

| CODE | DESCRIPTION |
|---------|---|
| LGSO | Leaf Guard - Swivel Outlet |
| LWD | Downpipe Water Diverter |
| OFF9 | 90mm Overflow Flanged |
| OFP | Plug To Fit 90mm Overflow |
| OS9 | 90mm Overflow Screen |
| OFF10 | 100mm Overflow Flanged |
| JOS10 | 100mm Ozzie Seal For Overflow |
| JOS1210 | 100mm x 125mm Ozzie Seal Reducer For WCK02 |
| JOS65 | 65mm Ozzie Seal For Sump And Water Controller Of FT500B And FT9000B Tanks |
| PC01 | Pump Cover |

Tank Stands

| CODE | DESCRIPTION | DIMENSIONS (L x W x H) |
|--------|-------------------------------------|---------------------------|
| TS600 | Stand to Suit 600Ltr Round Tank | 885 x 885 x 520 |
| TS1000 | Stand to Suit 1000Ltr Round Tank | 1055 x 1055 x 520 |
| SSTS6 | Stand to Suit 600Ltr Slimline Tank | 1210 x 650 x 520 |
| SSTS10 | Stand to Suit 1050Ltr Slimline Tank | 1450 x 700 x 520 |

Slimline Tank Accessories

| CODE | DESCRIPTION |
|---------|---|
| CVB20 | 20mm Brass check valve |
| STCH20 | 3/4" Flexible connection hose for Changeover Device - 600mm long |
| STCH20L | 3/4" Flexible connection hose for Changeover Device - 1000mm long |
| RFO1 | 1" Plastic retro fit outlet to suit pump suction on Slimline Tank |
| TB2 | 20mm Tank Bibcock for Slimline Tanks |

Underground Tank Accessories

| CODE | DESCRIPTION |
|--------|---|
| JOS90 | 90mm Ozzie Seal For Overflow |
| UMFO | Multifunctional Backflow Prevention Valve For Underground Tanks |
| URRM | 500mm Riser - For Deeper Installations |
| URTL | Lid To Suit Underground Tanks |
| R10112 | Uniseal 100mm |

MHC1



CLG



LGSO



TS600



SSTS10



LT01



Vortex Self-Cleaning Fine Filters

| CODE | DESCRIPTION |
|--------|---|
| URVF01 | Vortex Filter Suitable For Roof Areas Up To 200Sq Metres |
| URVF15 | Vortex Filter Suitable For Roof Areas Up To 500Sq Metres |
| URVF30 | Vortex Filter Suitable For Roof Areas Up To 3000Sq Metres |
| URVFR | Riser Only - For Vortex Self Cleaning Filter |
| URVFWM | Vortex Filter Wall Mount |



Tank Inlet Filter

| CODE | DESCRIPTION |
|------|---|
| TIF3 | Tank Inlet Filter 300mm including Sieve |
| TIF4 | Tank Inlet Filter 400mm including Sieve |



Sieves / Inlet Strainers

| CODE | DESCRIPTION |
|------|-------------|
| S2 | Sieve 200mm |
| S3 | Sieve 300mm |
| S4 | Sieve 400mm |
| S5 | Sieve 500mm |



Rural Fire Tank Fittings

| CODE | DESCRIPTION |
|-------|--|
| CFA1 | 65mm CFA Coupling Only (VIC) |
| CFA2 | 65mm CFA Coupling complete with 50mm (2") Outlet & Ball Valve |
| CFAC | Cap to suit CFA1 |
| CFANT | 65mm CFA Coupling nut and tail (VIC) |
| CFS1 | 65mm CFS Coupling Only (SA) |
| CFS2 | 65mm CFS Coupling (SA) Complete with 50mm (2") Outlet & Ball Valve |
| RFS | Rural Fire Service Fitting (NSW) |
| RFS2 | RFS Coupling Complete (VIC Metro, NSW Rural) |



Fittings for Pipeline Tanks

| CODE | DESCRIPTION |
|---------|--|
| AFV2L | 25mm (1") plastic Sleeve Valve - Long Arm |
| AFV2LB | 25mm (1") including 1.25" M & F Brass Outlet Plastic Sleeve Valve - Long Arm |
| IRS32 | Internal raised Suction 32mm - suit 40mm outlet |
| IRS40 | Internal raised Suction 40mm - suit 50mm outlet |
| PLTIP25 | Pipeline Tank Internal Pipework 25mm |
| PLTIP40 | Pipeline Tank Internal Pipework 40mm |
| PT2132 | 32mm (1 1/4") Dual Level reservoir valve |
| PT2140 | 40mm (1 1/2") Dual Level reservoir valve |
| PT2150 | 50mm (2") Dual Level reservoir valve |
| WFV1 | 25mm (1") Watermark approved Float Valve |
| WFV2 | 32mm (1 1/4") Watermark approved Float Valve |
| WFV3 | 40mm (1 1/2") Watermark approved Float Valve |

Stainless Steel Outlets

| CODE | DESCRIPTION |
|-----------|-------------|
| LHO1SS | 25mm M+F SS |
| LHO1.25SS | 32mm M+F SS |
| LHO1.5SS | 40mm M+F SS |
| LHO2SS | 50mm M+F SS |
| LHO3SS | 80MM M+F SS |

Stainless Steel Ball Valves

| CODE | DESCRIPTION |
|--------|----------------------------|
| SSBV1 | 25mm SS |
| SSBV2 | 50mm SS |
| SSBV3 | 80mm SS |
| SC80-F | Camlock Type F 80mm BSP SS |

Water Pumps

Household Pumps with Brass Rain/Mains Changeover Device

| CODE | DESCRIPTION | WATTAGE | MAX FLOW (LPM) | POWER (kW) | INLET | OUTLET | WARRANTY |
|-----------|-------------------|---------|----------------|------------|-----------|-----------|----------|
| MHR20-370 | Single Story Pump | 370W | 55 | 0.37 | 25mm BSPF | 20mm BSPF | 3 years |
| MHR20-550 | Double Story Pump | 550W | 70 | 0.55 | 25mm BSPF | 20mm BSPF | 3 years |

MHR20-370



MHR20-550



Submersible Pumps

| CODE | DESCRIPTION | WATTAGE | MAX FLOW (LPM) | POWER (kW) | CABLE LENGTH | OUTLET | WARRANTY |
|-------------|----------------------|---------|----------------|------------|--------------|-----------|----------|
| HHR-370PC | Pump & Press Control | 370W | 115 | 0.75 | 5m | 20mm BSPM | 2 years |
| HHR-370S-PC | Pump & Water Switch | 370W | 82 | 0.5 | 5m | 32mm BSPF | 2 years |

HHR-370PC



HHR-370S-PC



Garden Pumps with Press Control

| CODE | WATTAGE | MAX FLOW (LPM) | POWER (kW) | INLET | OUTLET | WARRANTY |
|---------|---------|----------------|------------|-----------|-----------|----------|
| DHJ600 | 600W | 45 | 0.6 | 25mm BSPF | 25mm BSPM | 2 years |
| DHJ800 | 800W | 55 | 0.8 | 25mm BSPF | 25mm BSPM | 2 years |
| HSJ1000 | 1000W | 85 | 1 | 25mm BSPF | 25mm BSPM | 3 years |



Pump Packages - Pump + Pump Cover

| CODE | DESCRIPTION | WATTAGE | MAX FLOW (LPM) | POWER (kW) | INLET | OUTLET | WARRANTY | PUMP COVER (L x W x H) |
|-------|--|---------|----------------|------------|-----------|-----------|----------|------------------------|
| PHGPS | Garden Pump with Press Control & Pump Cover | 600W | 45 | 0.6 | 25mm BSPF | 25mm BSPM | 2 years | 700L x 450W x 560H mm |
| PH400 | Household Pump With Brass Changeover Device & Pump Cover | 370W | 55 | 0.37 | 25mm BSPF | 20mm BSPF | 3 years | 700L x 450W x 560H mm |
| PH550 | Household Pump With Brass Changeover Device & Pump Cover | 550W | 70 | 0.55 | 25mm BSPF | 20mm BSPF | 3 years | 700L x 450W x 560H mm |

*Dimensions are approximate



Agriculture Categories

Browse our Agriculture Solutions

Page 28



Stock Troughs & Tanks

Page 37



Feeders & Drinkers

Page 38



Calf & Lamb Feeding

Page 43



Farm Storage Equipment

Page 50



Diesel Tanks & Ute Packs

Page 54



Diesel Self Bunded tanks

Page 60



AdBlue® Tanks & Ute Packs

Page 61



Fire Fighting & Water Cartage

Page 66



Safety & Spill Containment

Round Water Troughs

Master Tub Troughs



| CODE | CAPACITY (Litres) | DIMENSIONS | FLOAT INLET | PRESSURE | DRAIN | DRAIN CAP | FLOAT COVER |
|------|-------------------|-----------------|-------------|------------------|-------|-----------|-------------|
| MT2 | 200 | 970 DIA x 375H | 25mm BSPM | 140psi / 965 kPa | 75 | DC3 | MTFC |
| MT6 | 600 | 1400 DIA x 520H | 25mm BSPM | 140psi / 965 kPa | 75 | DC3 | MTFC |
| MT12 | 1,200 | 1765 DIA x 600H | 25mm BSPM | 140psi / 965 kPa | 75 | DC3 | MTFC |
| MT24 | 2,400 | 2380 DIA x 650H | 25mm BSPM | 140psi / 965 kPa | 75 | DC3 | MT05 |
| MT45 | 4,500 | 3730 DIA x 650H | 25mm BSPM | 140psi / 965 kPa | 75 | DC3 | MT04 |

KEY FEATURES

- Easy to service float valves
- Full float protection
- 75mm drain cap at very base of trough so maximum amount of water will empty when draining
- Easy to service 1" float valve
- Raised float allows trough to fill completely



Bare Round Water Troughs

| CODE | CAPACITY (Litres) | DIMENSIONS | DRAIN | DRAIN CAP |
|-------|-------------------|-----------------|-------|-----------|
| PT12W | 250 | 1000 DIA x 420H | 75 | DC3 |
| PT10W | 500 | 1200 DIA x 500H | 75 | DC3 |
| PT11W | 1,000 | 1650 DIA x 600H | 75 | DC3 |
| PT13W | 2,000 | 2100 DIA x 600H | 75 | DC3 |




Stock Water Tank & Trough

| CODE | DESCRIPTION | CAPACITY | DIMENSIONS | FLOAT INLET | DRAIN | DRAIN CAP | FLOAT COVER |
|---------|---------------------------------------|----------|------------------|-------------|-------|-----------|-------------|
| SWT4500 | Tank & Trough Combination | 4500ltr | 2500 DIA x 2000H | 25mm BSPM | 75 | DC3 | SWTC |
| SWT15 | Trough Only - inc Float Valve & Cover | 1500ltr | 2500 DIA x 375H | 25mm BSPM | 75 | DC3 | SWTC |

KEY FEATURES

1. 25mm float valve mounted in bottom of wall to maintain level in trough
2. 75mm drain cap in trough
3. Inspection cover
4. 25mm tank inlet and 25mm float valve supplied
5. Full float cover to protect valve from stock damage
6. Inlet connection

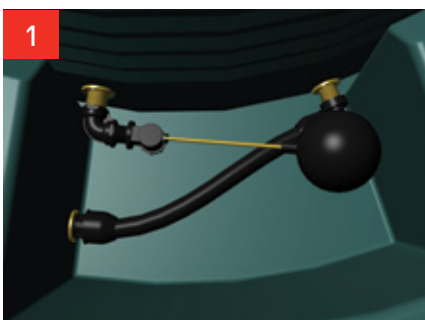

Long Water Troughs

Supa Troughs



| CODE | DESCRIPTION | CAPACITY (Litres) | PRESSURE | DIMENSIONS (L x W x H) | FLOAT COVER | DRAIN CAP |
|-------|-------------|-------------------|------------------|------------------------|-------------|-----------|
| SPT5 | 5 ft | 250 | 140psi / 965 kPa | 1500 x 600 x 375 | SPTA | DC3 |
| SPT9 | 9 ft | 450 | 140psi / 965 kPa | 2700 x 600 x 375 | SPTA | DC3 |
| SPT12 | 12 ft | 600 | 140psi / 965 kPa | 3700 x 600 x 375 | SPTAL | DC3 |

KEY FEATURES

- One-piece trough incorporating float cover
- Long lasting UV resistant polyethylene
- Flexible and durable
- Raised cover allows trough to fill fully
- 25mm Float Valve & Cover + 75mm Bung each end




'M' Series Troughs

| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | FLOAT COVER |
|--------|-------------------|------------------------|-------------|
| PTM31W | 140 | 2400 x 460 x 175 | PTMFC |
| PTM32W | 100 | 1800 x 460 x 175 | PTMFC |
| PTM33W | 60 | 1200 x 460 x 175 | PTMFC |
| PTM34W | 35 | 750 x 460 x 175 | PTMFC |

KEY FEATURES

- Long lasting UV resistant polyethylene
- Flexible and durable
- Stackable for storage
- Feed or water models available
- 15mm float valve and cover
- In built eyelets for securing to ground

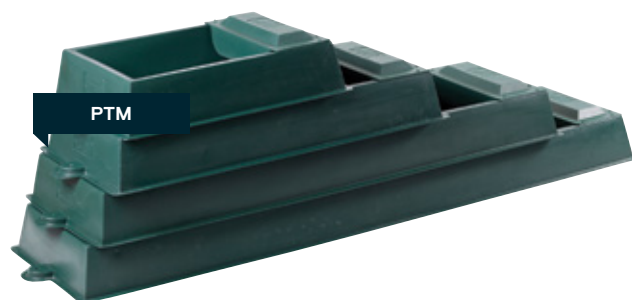


Sweep Ballast Troughs



| CODE | DESCRIPTION | CAPACITY | DIMENSIONS (L x W x H) | FLOAT COVER | BROOM | DRAIN PLUG |
|-----------|------------------------------|----------|------------------------|-------------|--------|------------|
| SWP250 | Trough with 25mm Float Valve | 250 ltr | 3492 x 580 x 350 | SWP250FC | STB250 | DP2 |
| SWP250-40 | Trough with 40mm Float Valve | 250 ltr | 3492 x 580 x 350 | SWP250FC | STB250 | DP2 |
| SWP450 | Trough with 25mm Float Valve | 450 ltr | 3495 x 772 x 375 | SWP450FC | STB450 | DP2 |
| SWP450-40 | Trough with 40mm Float Valve | 450 ltr | 3495 x 772 x 375 | SWP450FC | STB450 | DP2 |
| SWP450-50 | Trough with 50mm Float Valve | 450 ltr | 3495 x 772 x 375 | SWP450FC | STB450 | DP2 |

KEY FEATURES

- Easy cleaning - smooth sweep out end
- Flexible and durable
- Hinged float cover prevents any damage to inlet
- Tough double skin unit for extra strength
- 50mm Drain Plug
- Contoured brooms available for easy sweep out cleaning

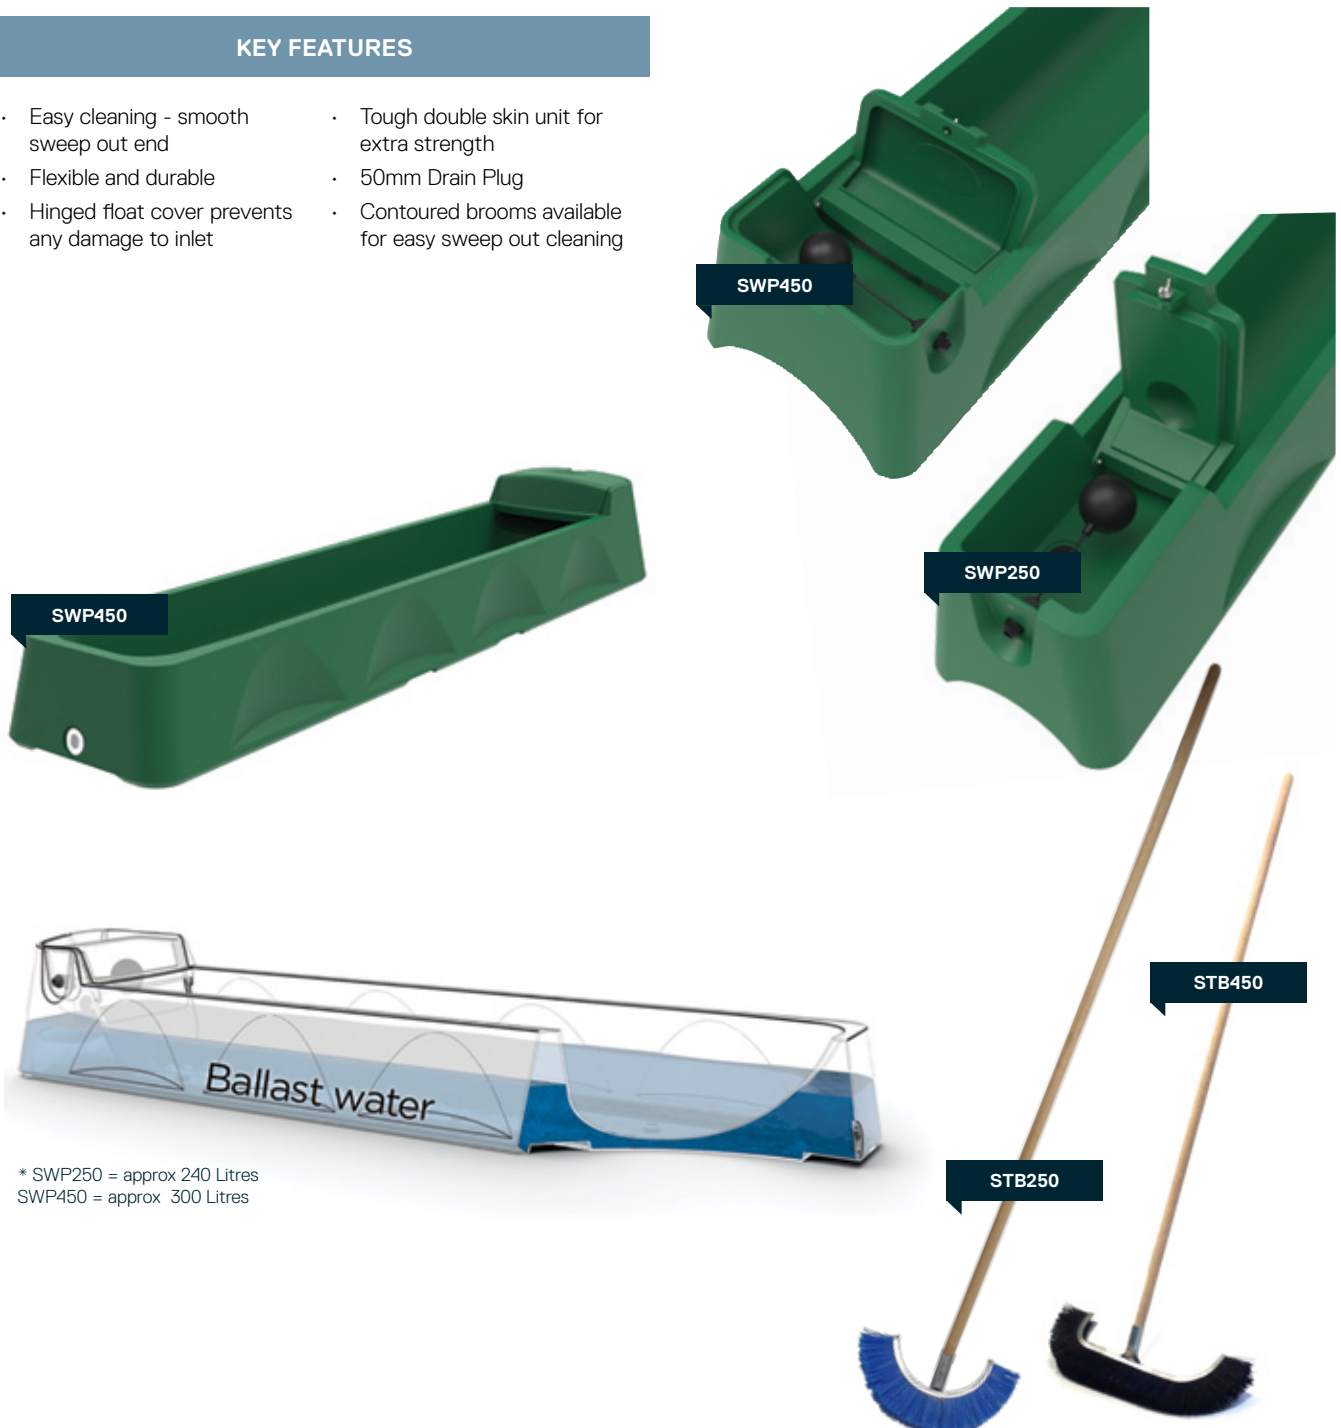

* SWP250 = approx 240 Litres
 SWP450 = approx 300 Litres

Polychoice Troughs



| CODE | PROFILE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | FLOAT INLET | PRESSURE | DRAIN | DRAIN PLUG |
|---------|---------|-------------------|------------------------|-------------|------------------|-------|------------|
| PCTL12 | Long | 160 | 1200 x 600 x 375 | 25 BSPM | 150psi / 1034kPa | 50 | DP2 |
| PCTL24 | Long | 360 | 2400 x 600 x 375 | 25 BSPM | 150psi / 1034kPa | 50 | DP2 |
| PCTR22 | Round | 220 | 1000 DIA x 400H | 25 BSPM | 150psi / 1034kPa | 50 | DP2 |
| PCTR66 | Round | 660 | 1500 DIA x 500H | 25 BSPM | 150psi / 1034kPa | 50 | DP2 |
| PCTR120 | Round | 1,200 | 1900 DIA x 530H | 25 BSPM | 150psi / 1034kPa | 50 | DP2 |

KEY FEATURES

- Enclosed float compartment
- Stackable
- Flexible & Durable
- 20mm Float Valve



Feed Troughs

Calf Feeding - Dry Feed Troughs

| CODE | CAPACITY | DIMENSIONS (L x W x H) | POLY INSERT |
|--------|----------|---------------------------|-------------|
| PTC36F | 68kg | 2400 x 300 x 600 | PTC36I |
| PTC37F | 52kg | 1800 x 300 x 600 | PTC37I |

KEY FEATURES

- Height of frame 600mm
- Galvanised frames with splayed legs for greater stability
- Provision for pegging down



'M' Series Troughs

| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) |
|--------|----------------------|---------------------------|
| PTM31F | 140 | 2400 x 460 x 185 |
| PTM32F | 100 | 1800 x 460 x 185 |
| PTM33F | 60 | 1200 x 460 x 185 |
| PTM34F | 35 | 750 x 460 x 185 |

KEY FEATURES

- Long lasting UV resistant polyethylene
- Flexible and durable
- Stackable for storage
- Feed or water models available
- In built eyelets for securing to ground



Continuous Dry Feed Trough

| CODE | DESCRIPTION | DIMENSIONS (L x W x H) | ANCHORING PEGS (6 pack) |
|-------|-----------------|---------------------------|----------------------------|
| CFT8 | No Ends | 2320 x 230 x 85 | FTP9 |
| CFT8E | Ends Both Sides | 2320 x 230 x 85 | |



Molasses Feeder

| CODE | DESCRIPTION |
|-------|---------------------|
| PT05 | Licker Drum 100 ltr |
| PT05C | Case only |
| PT05R | Roller only |

KEY FEATURES

- Urea feeding and bloat control
- Removable roller for cleaning
- Floating roller - no metal bearings

***Caution:** Special care should be taken when administering urea and other supplements, excess consumption can cause death



Footrot Baths

Standing Type



| CODE | DIMENSIONS (L x W x H) | CAPACITY (Max Litres) |
|------|---------------------------|--------------------------|
| FRB | 2530 x 1000 x 200 | 300 |

KEY FEATURES

- Control hoof diseases in sheep and goats
- Use with portable yard to keep animals confined
- Lightweight for ease of handling
- Non slip dimpled floor
- End to end linking feature
- Will not rot, rust or flake and fully chemical resistant

*Not recommended for cattle and horses




Race Type

| CODE | DIMENSIONS (L x W x H) | CAPACITY (Max Litres) |
|------|---------------------------|--------------------------|
| RFRB | 2400 x 480 x 200 | 80 |

KEY FEATURES

- Control hoof diseases in sheep and goats
- Unique pyramid shaped rib through centre of trough
- Keep hooves either side of the trough
- Added strength and support to trough floor
- Reduce amount of solution needed to treat stock
- Non slip dimpled floor
- End to end linking feature is ideal for placing in sheep race
- Will not rot, rust or flake and fully chemical resistant

*Not recommended for cattle and horses

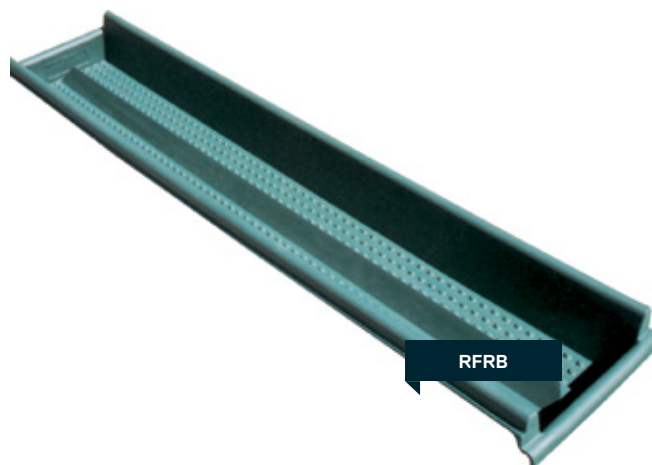

Trough Spares

Float Valves

| CODE | DESCRIPTION |
|----------|---|
| AFV2 | 25mm (1") Plastic Sleeve Valve to suit Supa Troughs, Master Tubs and Longline Troughs Pressure range 0 - 965kpa (0 - 140psi) |
| AFV2RKIT | AFV2 Repair Kit O-Ring, Washer pin and Arm |
| AFV2SEAL | Float Valve Seal AFV2 |
| PMF345 | Float to suit AFV3, AFV4, AFV5 |
| AFV3B | 32mm (1¼") Plastic Sleeve Valve - High Volume incl 40mm (1½") M & F Brass outlet. Pressure range 0 - 450kpa (0 - 65psi) |
| AFV4B | 40mm (1½") Plastic Sleeve Valve - High Volume incl 50mm (2") M & F Brass Outlet. Pressure range 0 - 450kpa (0 - 65psi) |
| AFV5B | 50mm (2") Plastic Sleeve Valve - High Volume incl 2½" M & F Brass Outlet. Pressure range 0 - 450kpa (0 - 65psi) |
| AFV6 | 25mm (1") Plastic piston valve to suit MT2, MT6 (fitted prior to May 2009) Pressure range 0 - 1400kpa (0 - 200psi) |
| AFV6L | 25mm piston valve long arm 1400KPA rating |
| AFV0L | 15mm (1/2") Philmac Float Valve - Long Arm For PT49W, PT50W & M Troughs |
| JFV20 | 20mm Jobe Float Valve for PolyChoice Troughs Pressure range 0 - 1034kpa (0 - 150psi) |



Drain Caps & Plugs

| CODE | DESCRIPTION |
|-------|--|
| DC2 | 50mm (2") Drain Cap for all longline troughs, PT49W & PT50W |
| DCSE | Seals only for 50mm (2") Drain Cap |
| DC3 | 75mm (3") Drain Cap |
| DC3SE | Seals only for 75mm (3") Drain Cap |
| DP2 | 50mm (2") Drain Plug |
| DPSE | Seals only for 50mm (2") Drain Plug |
| DP4B | 100mm (4") Brass drain plug to suit MT45 only |
| PTWK6 | 40mm (1½") Joiner for 16' and 12' Longline Water Troughs (inc. 50mm Uniseals and pipe) |
| TSPK | Trough Spare Parts Kit - Inc. DC3 x 5, DP2 x 5, DC2 x 5, AFV2 x 2, DC3SE x 3, Lynchpin x 5 |
| FTP9 | Anchoring Pegs for continuous troughing (Pack of 6) |



Float Covers

| CODE | SUITS |
|----------|--------------------------------|
| PTMFC | PTM31W, PTM32W, PTM33W, PTM34W |
| MT04 | MT45 |
| MT05 | MT24 |
| MTFC | MT2, MT6, MT12 |
| LLFC | Longline Troughs |
| SWTC | SWT4500, SWT15 |
| SPTA | SPT5, SPT9 |
| SPTAL | SPT12 |
| SWP250FC | SWP250, SWP250-40, SWP250-50 |
| SWP450FC | SWP450, SWP450-40, SWP450-50 |



Grain Feeders & Accessories

Hay & Grain Feeder

| CODE | DIMENSIONS (L x W x H) |
|-------|---------------------------|
| HGF13 | 1300 x 1150 x 1200 |


KEY FEATURES

- Holds one full hay bale
- Reduce waste
- Protect feed from rodents and pests



Grain Saver

| CODE | DESCRIPTION | DIMENSIONS |
|---------|--------------------------------------|-----------------|
| GRF400 | Trough 400 ltr | 1800 DIA x 350H |
| FTL2000 | Lid for Hay Ring (Heritage Green) | 2180 DIA |



*Hay ring not included

KEY FEATURES

- Protect feed from rodents and pests
- Raised centre keeps feed easy to reach for livestock



Grain Hopper

| CODE | DESCRIPTION | DIMENSIONS (L x W x H) |
|------|---|---------------------------|
| GAB2 | Grain Hopper (Auger Boot) fits 4-10 inch Auger | 1100 x 1200 x 540 |
| GABS | Strap & Buckle Only | |

KEY FEATURES

- Wide support base and low profile
- Suits augers up to 240mm (9.5")
- Crease resistant - flexes back into shape
- Equipped with strap to hold onto auger



Shovel

| CODE | DESCRIPTION | DIMENSIONS |
|------|--------------|------------|
| GS40 | Grain Shovel | 1100 H |

COLOUR RANGE



Calf Milk Feeders



| CODE | DESCRIPTION | CAPACITY (Litres) | DIMENSIONS (L x W x H) | BRACKETS & MOUNTS | TEAT & CAP | TEAT |
|-------|--|-------------------|------------------------|-------------------|------------|------|
| MBP | Single Teat Milk Bottle | 2 | 100 x 180 x 250 | | PCT/SCIT | PCT |
| MM1P | Single Teat Feeder | 5 | 200 x 200 x 300 | | PCT/SCIT | PCT |
| MM5P | 5 Teat Feeder - Divisional | 30 | 270 x 760 x 300 | MM5BR | PCT/SCIT | PCT |
| MM8P | 8 Teat Feeder - Divisional | 40 | 340 x 1130 x 300 | MM12BR | PCT/SCIT | PCT |
| MM12P | 12 Teat Feeder - Divisional | 70 | 540 x 1260 x 320 | MM12BR | PCT/SCIT | PCT |
| MM13P | 13 Teat Feeder - Divisional | 70 | 280 x 1800 x 330 | MM12BR | PCT/SCIT | PCT |
| MM20P | 20 Teat Feeder - Divisional (Freestanding) | 100 | 1110 x 1110 x 330 | | PCT/SCIT | PCT |
| CF5P | 5 Teat Feeder - No Divisions | 25 | 300 x 590 x 360 | MM5BR | PCT/SCIT | PCT |
| CF12P | 12 Teat Feeder - No Divisions | 70 | 500 x 1155 x 340 | MM12BR | PCT/SCIT | PCT |
| CF13P | 13 Teat Feeder - No Divisions | 70 | 280 x 1800 x 330 | MM12BR | PCT/SCIT | PCT |

KEY FEATURES

- Generous spacing between teats
- Teat caps easily unscrew to wash out feeder
- Galvanised hanging brackets to suit rail spacing
- UV stabilised poly for long outdoor use

CF13P



MM12P



MM1P



CF5P



MM20P



MM8P



MM5P



MM5PPNK



MBP



Available in Pink (MM5 & MM8)

Lamb Milk Feeders

| CODE | DESCRIPTION | CAPACITY (Litres) | DIMENSIONS (L x W x H) | BRACKETS & MOUNTS | TEATS & CAPS | TEATS |
|-------|--|-------------------|------------------------|-------------------|--------------|-------|
| FLBF | Clear Single Teat Milk Feeders | 1 | 80 x 80 x 300 | | LT/BC | LT |
| MBL | Single Teat Milk Bottle | 2 | 100 x 180 x 250 | | LT/SC | LT |
| MM1L | Single Teat Feeder | 5 | 200 x 200 x 300 | | LT/SC | LT |
| MM5L | 5 Teat Feeder - Divisional | 30 | 270 x 760 x 300 | MM5BR | LT/SC | LT |
| MM8L | 8 Teat Feeder - Divisional | 40 | 340 x 1130 x 300 | MM12BR | LT/SC | LT |
| MM12L | 12 Teat Feeder - Divisional | 70 | 540 x 1260 x 320 | MM12BR | LT/SC | LT |
| MM13L | 13 Teat Feeder - Divisional | 70 | 280 x 1800 x 330 | MM12BR | LT/SC | LT |
| MM20L | 20 Teat Feeder - Divisional (Freestanding) | 100 | 1110 x 1110 x 330 | | LT/BC | LT |
| CF5L | 5 Teat Feeder - No Divisions | 25 | 270 x 760 x 300 | MM5BR | LT/SC | LT |
| CF12L | 12 Teat Feeder - Not Divisions | 70 | 500 x 1155 x 340 | MM12BR | LT/SC | LT |
| CF13L | 13 Teat Feeder - No Divisions | 70 | 280 x 1800 x 330 | MM12BR | LT/SC | LT |



KEY FEATURES

- Generous spacing between teats
- Teat caps easily unscrew to wash out feeder
- Galvanised hanging brackets to suit rail spacing
- UV stabilised poly for long outdoor use



Milk Test Buckets

| CODE | CAPACITY (Litres) | DIMENSIONS | SEAL | LID & SEAL |
|-------|-------------------|----------------|------|------------|
| PTB25 | 25 | 300 DIA x 490H | PTBS | PTBL25 |
| PTB32 | 32 | 330 DIA x 510H | PTBS | PTBL32 |

KEY FEATURES

- Stainless steel handles
- Replacement Seals Available
- Pipe attachments to suit 5/8" or 3/4" tubing



Mobile Gravity Milk Feeders



| CODE | DESCRIPTION | CAPACITY | DIMENSIONS (L x W x H) | MANIFOLD |
|----------|------------------------------|----------|------------------------|----------|
| MG40P | 40 Teat Feeder - single axle | 400 ltr | 2200 x 1500 x 1200 | MG4M |
| MG50P | 50 Teat Feeder - single axle | 400 ltr | 2800 x 1500 x 1200 | MG5M |
| MG50TAP | 50 Teat Feeder - dual axle | 400 ltr | 2800 x 1500 x 1200 | MG5M |
| MG50LTAP | 50 Teat Feeder - dual axle | 800 ltr | 2800 x 1500 x 1200 | MG5M |
| MG60P | 60 Teat Feeder - dual axle | 800 ltr | 3100 x 1550 x 1500 | MG6M |
| MG400T | 400 ltr (tank only) | 400 ltr | | |
| MG800T | 800 ltr (tank only) | 800 ltr | | |



Mobile Mixer and Tanker

| CODE | DESCRIPTION | DIMENSIONS (L x W x H) |
|--------|----------------------|------------------------|
| MMT400 | 400 ltr - 2.5HP Pump | 2200 x 1500 x 1200 |



Riverina Milk Transporter

| CODE | DESCRIPTION | DIMENSIONS (L x W x H) |
|------|-----------------------|------------------------|
| RMT | 200 ltr - single axle | 1700 x 1200 x 1000 |



KEY FEATURES

- Fully hot dipped galvanised trailers
- Screw on teats can be replaced with blanks
- Adjustable fold away jockey wheel
- Built in backwash for all trailer units
- Self cleaning washing head used in tank
- Large hinged filling lids

Fence & Stable Drinkers



| CODE | FENCE BRACKETS | CAPACITY (Litres) | DIMENSIONS (L x W x H) | BRACKETS & MOUNTS | DRAIN CAP |
|--------|----------------|-------------------|------------------------|-------------------|-----------|
| PT48W | - | 8 | 300 x 300 x 224 | PT14BR | PT04WC |
| PT48WB | Yes | 8 | 300 x 300 x 224 | PT14BR | PT04WC |
| PT49W | - | 25 | 440 x 380 x 350 | PT49BRS | DC2 |
| PT49WB | Yes | 25 | 440 x 380 x 350 | PT49BR | DC2 |
| PT50W | - | 45 | 490 x 430 x 440 | PT49BRS | DC2 |
| PT50WB | Yes | 45 | 490 x 430 x 440 | PT49BRS | DC2 |
| PT90W | Yes | 90 | 550 x 1090 x 400 | PT90BRS | DC2 |

KEY FEATURES

- Drain cap for easy cleaning
- Fix directly to the wall or brackets available for fence hanging
- Stylish colours available



Fence & Stable Feeders

| CODE | DESCRIPTION | CAPACITY (Litres) | DIMENSIONS (L x W x H) | BRACKETS & MOUNTS |
|--------|-------------------------------------|-------------------|------------------------|-------------------|
| PT02 | Fitted with fence brackets | 45 | 540 x 410 x 380 | PT49BRS |
| PT02FS | Fitted with wall mount brackets | 45 | 540 x 410 x 380 | PT02STBR |
| PT03 | Hayrack (suitable to hang on fence) | | 600 x 500 x 700 | PT03R |
| PT14 | Fence Feeder 'D' Type | 32 | 440 x 400 x 250 | PT14BR |
| PT15 | Corner Feeder | 32 | 450 x 450 x 270 | PT14BR |
| PTF18 | Tyre Feeder | 18 | 350 DIA x 195H | |

COLOUR RANGE



Teats & Accessories

Accessories

| CODE | DESCRIPTION |
|------|--|
| HL4 | Hinged Lid 400mm for All MG40, MG50 & MG60 Calf Feeders |
| JWK | Jockey Wheel Kit - to suit Mobile Gravity Calf Feeder |
| MG2W | 16" Wheel only for MG26 Calf Feeder (no axle) |
| MG4W | 18" Wheel only for MG40, MM50, MG50 & Calf Feeder (no axle) each |
| MG4M | 20 Teat manifold for MG40 Calf Feeder (Specify front or rear) |
| MG5M | 25 Teat manifold for MG50 Calf Feeder (Specify front or rear) |
| MG6M | 30 Teat manifold for MG60 Calf Feeder (Specify front or rear) |
| MGD1 | Mud guards for single wheel calf feeders (Set of 2) |
| MGD2 | Mud guards for tandem wheel calf feeders (Set of 2) |
| SL5 | Screw lid - complete 355mm (suits RMT) |



HL4



LT/BC



LT/SC



PCT/SCIT

Brackets

| CODE | DESCRIPTION |
|----------|--|
| MM5BR | Brackets to suit MM5 and CF5 (Set of 2) |
| MM12BR | Brackets to suit MM8, MM12, MM13, CF12 & CF13 (Set of 2) |
| PT14BR | Set of Brackets to suit Fence Feeders PT14, PT15, PT48WB |
| PT49BR | Set of Brackets to suit PT49WB, PT50WB & PT02 |
| PT02STBR | Set of wall Mount Brackets to suit PT02FS |
| PT03R | Galvanised Rack to suit PT03 Hayrack (Set of 2) |

Accessories

| CODE | DESCRIPTION |
|-------|--|
| PTWK7 | Spacesaver 15mm (½") piston valve for PT48W (Pressure range 0 - 850kpa (0 - 120psi)) |

Teats and Caps

| CODE | DESCRIPTION |
|--------|--|
| PCT | Peach Teats |
| SCITP | Screw Cap with internal thread for Peach Teats |
| PCT/SC | Peach Calf Teat pulled through Screw Cap |
| LT | Lamb Teat |
| LT/BC | Lamb Teat through Bottle Cap |
| LT/SC | Lamb Teat through Screw Cap |
| SCL | Screw Caps for Lamb Teats |
| SCP | Screw Cap for Peach Teat |

Drain Caps

| CODE | DESCRIPTION |
|--------|--|
| PT04WC | 25mm (1") Drain Cap for PT48W Drinkers |
| DC2 | 50mm (2") Drain Cap for PT49W & PT50W Drinkers |
| DCSE | Seals only for 50mm (2") Drain Cap |

Milk Transfer Pump Kit

| CODE | DESCRIPTION | FLOW (LPM) |
|--------|--|------------|
| MTP110 | Milk Transfer Submersible pump kit 12V | 110 |



MTP110

Feed Storage Bins

Feed Storage Bin & Tubs



| CODE | DESCRIPTION | DIMENSIONS (L x W x H) | WITH LID | REPLACEMENT LID |
|--------|---------------------------------------|------------------------|----------|-----------------|
| FSB200 | Feed Storage Bin 200 ltr - Hinged Lid | 520 x 860 x 560 | | |
| FST100 | Storage Tub 100 ltr | 1000 X 300 X 580 | FST100L | FSTL1020 |
| FST200 | Storage Tub 200 ltr | 1000 X 570 X 580 | FST200L | FSTL1020 |
| FST300 | Storage Tub 300 ltr | 1165 X 730 X 580 | FST300L | FSTL30 |



*Image shown with optional lid

Handi Steps

| CODE | DESCRIPTION | DIMENSIONS (L x W x H) |
|------|-------------|------------------------|
| HSP | 120kg SWL | 700 x 520 x 670 |

* Recommended for indoor use only



Buckets & Scoops

Buckets

| CODE | VOLUME |
|-------|--------------------------------|
| HB16 | 16 ltr |
| POB20 | 20 ltr with level measurements |



Feed Scoops

| CODE | VOLUME |
|------|------------------|
| PSC | 2.5kg of pellets |



| COLOUR RANGE | | |
|--------------|-----|-----|
| LME | PNK | YEL |
| PUR | HGR | |

KEY FEATURES

- Available in a range of stylish colours
- Large capacity
- Sturdy handles
- Stackable

Dog Houses



| CODE | DESCRIPTION | DIMENSIONS (L x W x H) | OPENING SIZE |
|------|--------------------|------------------------|--------------|
| TDD1 | Dinkum Doghouse 1 | 1050 x 780 x 690 | 390 DIA |
| TDD2 | Dinkum Doghouse 2 | 680 x 460 x 640 | 180 x 260 |
| TDD3 | Log Cabin Doghouse | 1060 x 860 x 780 | 280 x 400 |

KEY FEATURES

- Cooler in summer, warmer in winter
- Rear venting to create airflow
- Hygienic - easily washed out

COLOUR RANGE

*TDD1/TDD2 Only



Tractor Roofs

| CODE | DESCRIPTION | DIMENSIONS (L x W x H) | MOUNTING BRACKET - 2 POST | MOUNTING BRACKET - 4 POST |
|-------------|---|------------------------|---------------------------|---------------------------|
| TR0 | Small (Ride on mowers) | 1200 x 850 x 120 | MTR0-2 | MTR0-4 |
| TR1 | Medium (Tractors up to 45HP) | 1530 x 1140 x 150 | MTR1-2 | MTR1-4 |
| TR2 | Large (Tractors over 45HP) | 1830 x 1500 x 200 | MTR2-2 | MTR2-4 |
| MTR2-LGEKIT | Large kit required in addition for wide post ROPS | | | |

COLOUR RANGE



KEY FEATURES

- Designed for ROPS frames
- 3 sizes available




Produce Bins & Liners



| CODE | DESCRIPTION | CAPACITY (Litres) | DIMENSIONS (L x W x H) | LID |
|----------|------------------------------|-------------------|------------------------|------|
| PPB100 | Produce Bin | 1,000 | 1190 x 1190 x 1010 | PPBL |
| PPB100FC | Produce Bin incl fork plates | 1,000 | 1190 x 1190 x 1010 | PPBL |
| PBL85 | Liner Only | 850 | 1110 x 1110 x 760 | PBLD |
| PBL100 | Liner Only | 1,000 | 1110 x 1110 x 885 | PBLD |
| PBL145 | Liner Only | 1,450 | 1110 x 1110 x 1200 | PBLD |
| GBL | Grape Bin Liner | 2,850 | GBLLIDN | |

KEY FEATURES - PPB100

- Stackable when full, nest them empty
- Optimum height for hand picking
- FEA analysis testing completed for strength
- Ideal pallet size for transporting
- Forklift access channels
- Food grade polyethylene

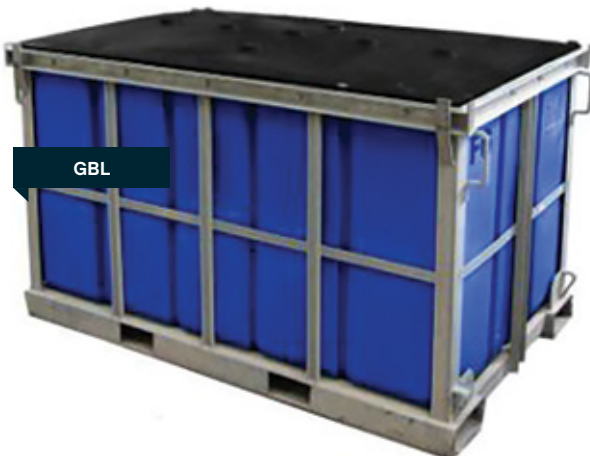

*Steel frames not included, only shown for illustrative purposes

Bulk Storage

Bulka Bins



| CODE | DESCRIPTION | CAPACITY (M ³) | DIMENSIONS (L x W x H) | LID |
|--------|----------------------------------|----------------------------|------------------------|-------|
| BB12 | Galvanised frame | 1.2 | 1200 x 1500 x 1600 | BBLID |
| BB12XL | Galvanised frame - extended legs | 1.2 | 1200 x 1500 x 2300 | BBLID |
| BB12L | Liner only | 1.2 | | BBLID |
| BB16 | Galvanised frame | 1.6 | 1200 x 1500 x 1860 | BBLID |
| BB16XL | Galvanised frame - extended legs | 1.6 | 1200 x 1500 x 2560 | BBLID |
| BB16L | Liner only | 1.6 | | BBLID |

| PRODUCT | BB12 | BB16 |
|--------------------|-------|--------|
| Wheat & Meatmeal | 960kg | 1200kg |
| Barley | 750kg | 1000kg |
| Oats | 600kg | 800kg |
| Urea | 876kg | 1200kg |
| Lucerne | 300kg | 400kg |
| Calf & Pig Pellets | 800kg | 1050kg |

KEY FEATURES

- All galvanised forklift frame - lifts on/off easily
- Stainless steel chute with rodent and weather resistant outlet
- Extended leg models allow for bag filling
- Suitable for grains, pellets and more



Maxi Bins

| DRY OUTLET | LIQUID OUTLET | CAPACITY (M ³) | DIMENSIONS (L x W x H) |
|------------|---------------|----------------------------|------------------------|
| MB60P | MB60L | 0.6 | 1165 x 1165 x 1450 |
| MB100P | MB100L | 1.0 | 1165 x 1165 x 1870 |
| MB150P | MB150L | 1.5 | 1165 x 1165 x 2235 |
| MB200P | MB200L | 2.0 | 1165 x 1165 x 2655 |



Silomaster



| DRY OUTLET | LIQUID OUTLET | CAPACITY (Litres) | DIMENSIONS |
|------------|---------------|-------------------|-----------------|
| SM5000D | SM5000L | 5,000 | 2380DIA x 3030H |
| SM7500D | SM7500L | 7,500 | 2380DIA x 3620H |
| SM10000D | SM10000L | 10,000 | 2380DIA x 4210H |

Silomaster - Heavy Duty

| DRY OUTLET | LIQUID OUTLET | CAPACITY (Litres) | DIMENSIONS |
|------------|---------------|-------------------|-----------------|
| SM5000HDD | SM5000HDL | 5,000 | 2380DIA x 3530H |
| SM7500HDD | SM7500HDL | 7,500 | 2380DIA x 4115H |
| SM10000HDD | SM10000HDL | 10,000 | 2380DIA x 4705H |

*Suitable to hold liquids up to 1.4SG

KEY FEATURES

- Sturdy galvanised steel frame and rust proof poly tank
- Integrated forklift channels
- Rodent and weather proof
- Screw lid

COLOUR RANGE



Dry Feed Frame

| CODE | CAPACITY (Litres) | DIMENSIONS |
|-----------|-------------------|-----------------|
| SMDF5000 | 5,000 | 2380DIA x 3525H |
| SMDF7500 | 7,500 | 2380DIA x 4115H |
| SMDF10000 | 10,000 | 2380DIA x 4705H |



Silomaster Large Capacity





| CODE | CAPACITY (Litres) | DIMENSIONS |
|----------|----------------------|-----------------|
| SM20000L | 20,000 | 3450DIA x 4376H |
| SM25000L | 25,000 | 3450DIA x 4923H |
| SM30000L | 30,000 | 3450DIA x 5471H |

KEY FEATURES

- Sturdy galvanised steel frame and rust proof poly tank
- Integrated forklift channels
- Rodent and weather proof
- Screw lid
- 100mm 90 deg fitting

COLOUR RANGE

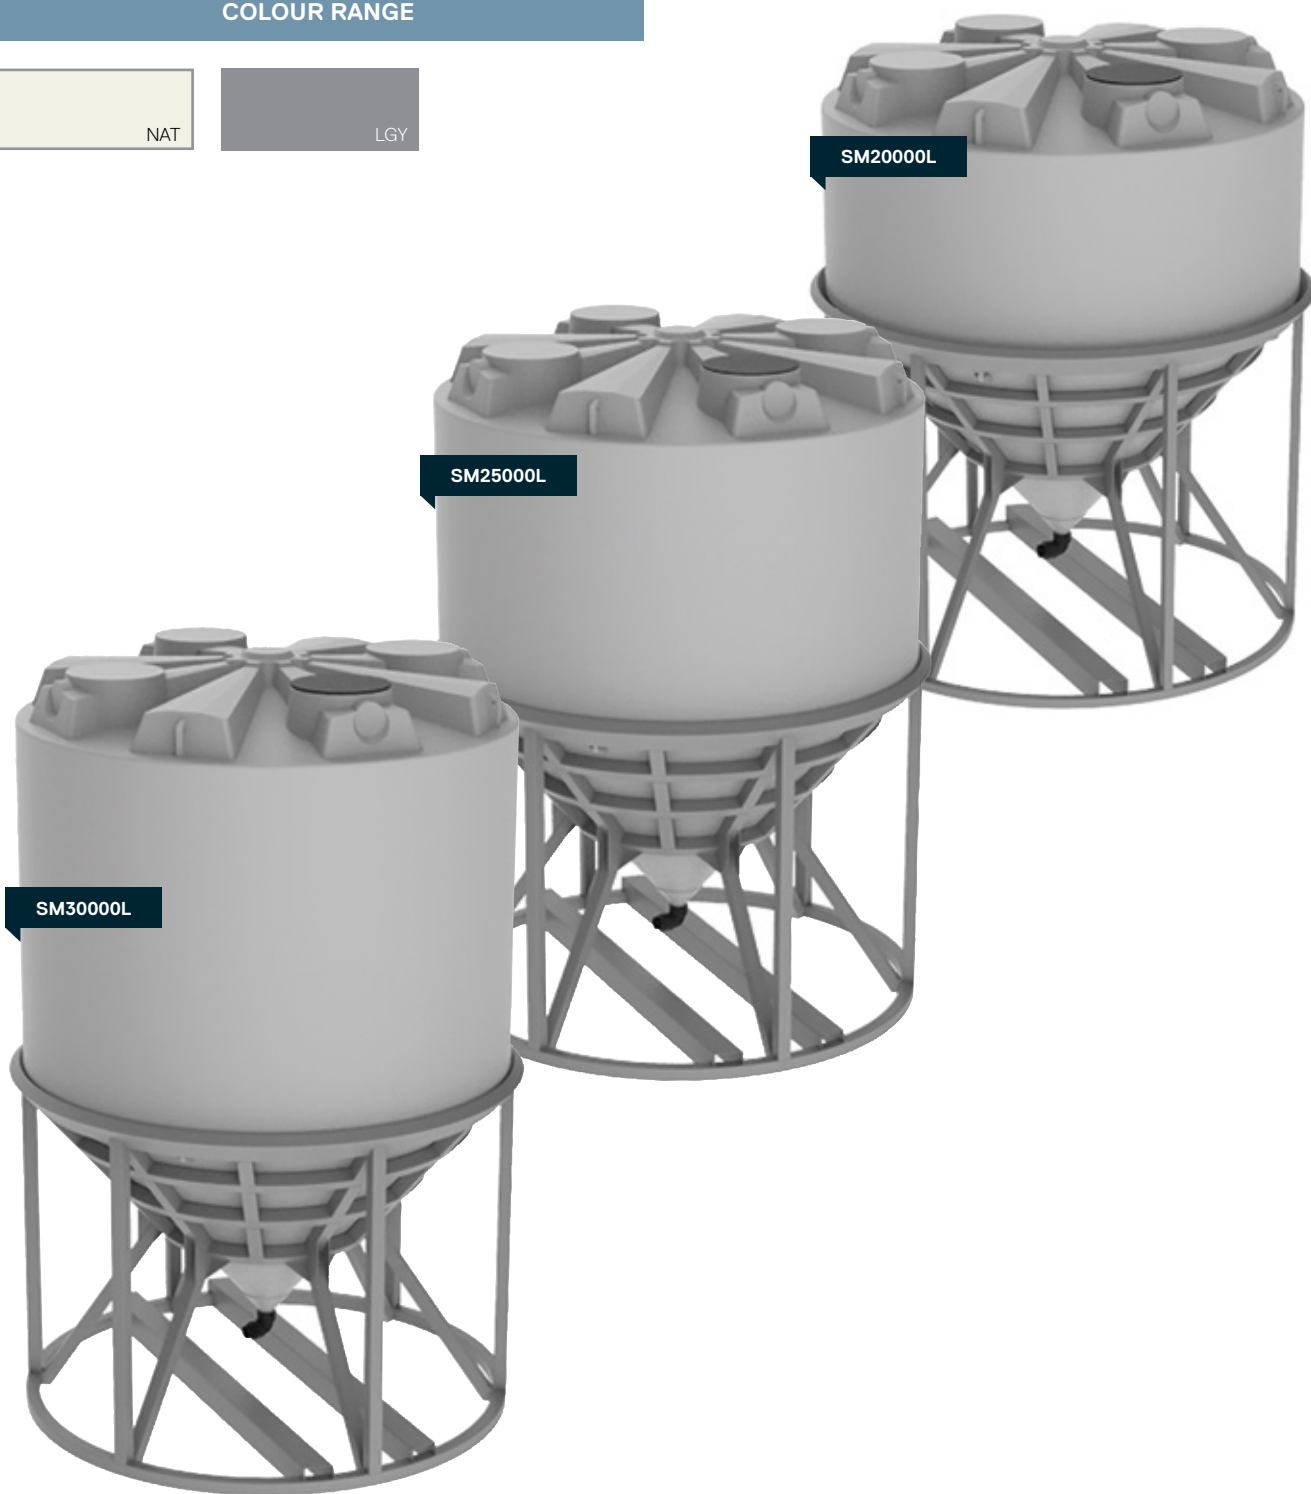

AGRICULTURE

Vehicle Storage

Vehicle Water Tanks




| CODE | DESCRIPTION | CAPACITY (Litres) | DIMENSIONS (L x W x H) |
|---------|--|-------------------|------------------------|
| HT28 | Handi Tank only | 28 | 415 x 240 x 380 |
| HT28P | Handi Tank with mounting plate | 28 | 415 x 240 x 380 |
| TWT60 | Truck Water Tank only | 60 | 600 x 390 x 390 |
| TWT60S | Truck Water Tank with mounting bracket and strap | 60 | 600 x 390 x 390 |
| TWTWTAP | Tap only for Truck Water Tanks | | |
| TWTS | Mounting Brackets & Straps for truck water tank | | |

KEY FEATURES

- 20mm tap for dispensing
- 20mm cap at top for easy filling

COLOUR RANGE

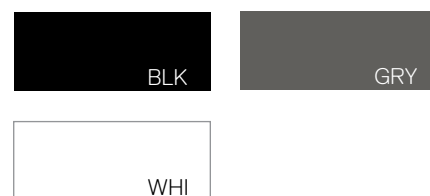

Tool Boxes

| CODE | DESCRIPTION | CAPACITY (Litres) | DIMENSIONS (L x W x H) |
|---------|------------------------------|-------------------|------------------------|
| BUC14 | B'Ute Tool Box - Small | 140 | 970 x 400 x 360 |
| BUC26 | B'Ute Tool Box - Large | 266 | 1170 x 570 x 400 |
| TBC20 | Tradesman Box | 200 | 980 x 390 x 600 |
| TBC20FH | Tradesman Box Friction Hinge | 200 | 980 x 390 x 600 |

KEY FEATURES

- Flush mounted zinc hardware
- Raised weather resistant lid seal
- Removable internal tray included

COLOUR RANGE



Diesel Ute Packs

Diesel Essential Cube Ute Packs



| CODE | CAPACITY DIESEL (Litres) | DIMENSIONS (L x W x H) | PUMP* | DIESEL PUMP FLOW (LPM) | HOSE LENGTH (m) | AUTO TRIGGER NOZZLE |
|----------|--------------------------|------------------------|----------|------------------------|-----------------|---------------------|
| DMPQ400E | 400 | 930 x 1200 x 685 | DP50PUMP | 50 | 4 | Yes |

*Refer to Diesel Pump page for full pump details



DMPQ400E

Diesel Essential Ute Packs

| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | PUMP* | PUMP FLOW (LPM) | HOSE LENGTH (m) | AUTO TRIGGER NOZZLE | MOUNTING FRAMES |
|---------|-------------------|------------------------|----------|-----------------|-----------------|---------------------|-----------------|
| DMP100E | 100 | 770 x 540 x 500 | DP50PUMP | 50 | 4 | Yes | DM100MF |
| DMP200E | 200 | 1000 x 750 x 605 | DP50PUMP | 50 | 4 | Yes | DM200MF |
| DMP400E | 400 | 1620 x 750 x 665 | DP50PUMP | 50 | 4 | Yes | DM400MF |
| DMP600E | 600 | 1720 x 890 x 755 | DP50PUMP | 50 | 4 | Yes | DM600MF |
| DMP800E | 800 | 1720 x 890 x 925 | DP50PUMP | 50 | 4 | Yes | DM800MF |

*Refer to Diesel Pump page for full pump details

KEY FEATURES

- Up to 50LPM Italian Piusi pump
- Lockable lid
- UV protected
- Earth strap
- Isolation switch
- 4m Diesel hose
- Diesel auto trigger nozzle
- Alligator clips

OPTIONAL EXTRAS

- Gas Struts - Only available on cube ute packs
- Fuel Gauge
- Strainer
- Bund available - cube ute packs



DMP800E

DMP600E

DMP400E

DMP200E

DMP100E

Diesel Transfer Tanks

Bare Tank

| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | SKIDS |
|--------|----------------------|---------------------------|---------|
| DM1200 | 1200 | 1450 x 1200 x 1000 | SKD1200 |
| DM2000 | 2000 | 1900 x 1450 x 1100 | SKD2000 |
| DM3000 | 3000 | 2100 x 1500 x 1200 | SKD3000 |



Transfer Tank & 12V Pump (up to 50LPM)

| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | VOLTAGE | POWER (kW) | PUMP CODE | FLOW (LPM) |
|---------|----------------------|---------------------------|---------|---------------|-----------------|---------------|
| DMP600 | 600 | 1200 x 1050 x 715 | 12 | 0.3 | DP50PUMP12V-ASY | 50 |
| DMP800 | 800 | 1450 x 1200 x 740 | 12 | 0.3 | DP50PUMP12V-ASY | 50 |
| DMP1200 | 1200 | 1450 x 1200 x 1000 | 12 | 0.3 | DP50PUMP12V-ASY | 50 |
| DMP2000 | 2000 | 1900 x 1450 x 1100 | 12 | 0.3 | DP50PUMP12V-ASY | 50 |
| DMP3000 | 3000 | 2100 x 1500 x 1200 | 12 | 0.3 | DP50PUMP12V-ASY | 50 |

Transfer Tank & Fastflow 12V Pump (up to 85LPM)

| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | VOLTAGE | POWER (kW) | PUMP CODE | FLOW (LPM) |
|----------|----------------------|---------------------------|---------|---------------|-------------|---------------|
| DMPF600 | 600 | 1200 x 1050 x 715 | 12 | 0.5 | DP85PUMP12V | 85 |
| DMPF800 | 800 | 1450 x 1200 x 740 | 12 | 0.5 | DP85PUMP12V | 85 |
| DMPF1200 | 1200 | 1450 x 1200 x 1000 | 12 | 0.5 | DP85PUMP12V | 85 |
| DMPF2000 | 2000 | 1900 x 1450 x 1100 | 12 | 0.5 | DP85PUMP12V | 85 |
| DMPF3000 | 3000 | 2100 x 1500 x 1200 | 12 | 0.5 | DP85PUMP12V | 85 |

Transfer Tank & 24/12V Pump (70/35LPM)

| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | VOLTAGE | POWER (kW) | PUMP CODE | FLOW (LPM) |
|----------|----------------------|---------------------------|---------|---------------|---------------|---------------|
| DMPD600 | 600 | 1200 x 1050 x 715 | 12/24 | 0.42/0.15 | DP1224PUMP12V | 70/35 |
| DMPD800 | 800 | 1450 x 1200 x 740 | 12/24 | 0.42/0.15 | DP1224PUMP12V | 70/35 |
| DMPD1200 | 1200 | 1450 x 1200 x 1000 | 12/24 | 0.42/0.15 | DP1224PUMP12V | 70/35 |
| DMPD2000 | 2000 | 1900 x 1450 x 1100 | 12/24 | 0.42/0.15 | DP1224PUMP12V | 70/35 |
| DMPD3000 | 3000 | 2100 x 1500 x 1200 | 12/24 | 0.42/0.15 | DP1224PUMP12V | 70/35 |

KEY FEATURES

- High quality Piusi Italian pump
- Stainless steel pin mounting feet to secure to trailer or flat bed
- Lockable filling port
- 4 metre Diesel hose and leads
- Auto trigger nozzle and swivel
- *Refer to Diesel Pump page for full pump details

Diesel Trailer Packages



| CODE | CAPACITY (Litres) | TANK DIMENSIONS (L x W x H) | TRAILER DIMENSIONS (L x W x H) | PUMP* | PUMP FLOW LPM | HOSE LENGTH (m) | AUTO TRIGGER NOZZLE |
|-----------|-------------------|-----------------------------|--------------------------------|----------|---------------|-----------------|---------------------|
| DMPFT1200 | 1200 | 1450 x 1200 x 1000 | 3940 x 1770 x 1500 | DP85PUMP | 85 | 6 | Yes |
| DMPFT2000 | 2000 | 1900 x 1450 x 1200 | 4460 x 1970 x 1650 | DP85PUMP | 85 | 6 | Yes |

KEY FEATURES - TRAILER

- Hot dip galvanised dual axle trailer
- 5 Stud Wheel Pattern
- Electric brakes on 2000 ltr unit
- Road pack including brakes and LED lights
- Emergency breakaway protection
- Compliance plate - road registrable

KEY FEATURES - TANK AND PUMP

- 85LPM 12V Diesel pump with by-pass valve and integrated on/off switch
- Auto shut off nozzle with 6m hose and reel
- 4m battery leads
- Breather vent
- 400mm 1/4 turn hinged lid
- Trailer mounted toolbox to protect the hose, pump and nozzle
- *Refer to Diesel Pump page for full pump details

DMPFT1200T



Optional 10m retractable Diesel hose reel



Diesel Single Skin Smooth Wall Tanks




| CODE | CAPACITY (Litres) | DIMENSIONS |
|-------------|-------------------|-------------------|
| DSW5000LGY | 5,000 | 1800 DIA x 2300 H |
| DSW7000LGY | 7,000 | 2200 DIA x 2300 H |
| DSW10000LGY | 10,000 | 2480 DIA x 2450 H |

KEY FEATURES


- Clock Type Level Gauge Option to upgrade
- Galvanised Pipe work
- 2" Aluminium Cam Lock
- 2" Brass Outlet and Ball Valve
- Earth Rod
- Breather Vent
- Australian Made
- Fill rate maximum 250LPM
- Overfill protection

* NOTE: Please seek advice of local authorities for positioning on site

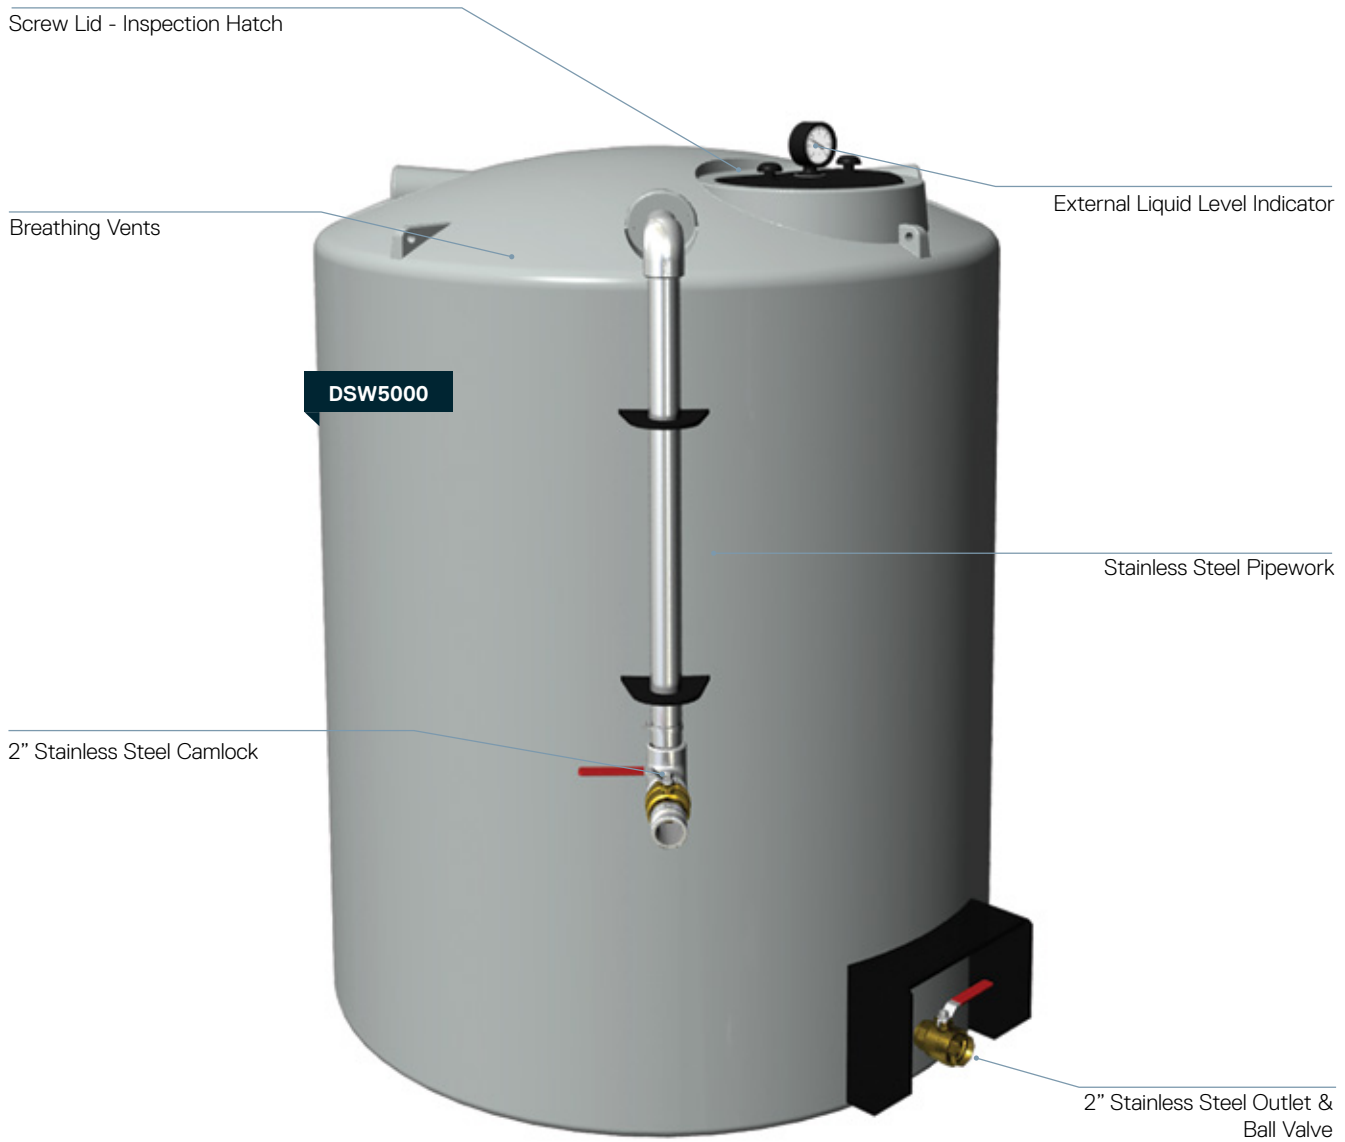


Diesel Self Bunded Tank

Three models available: Essential, Ranger or Quantum

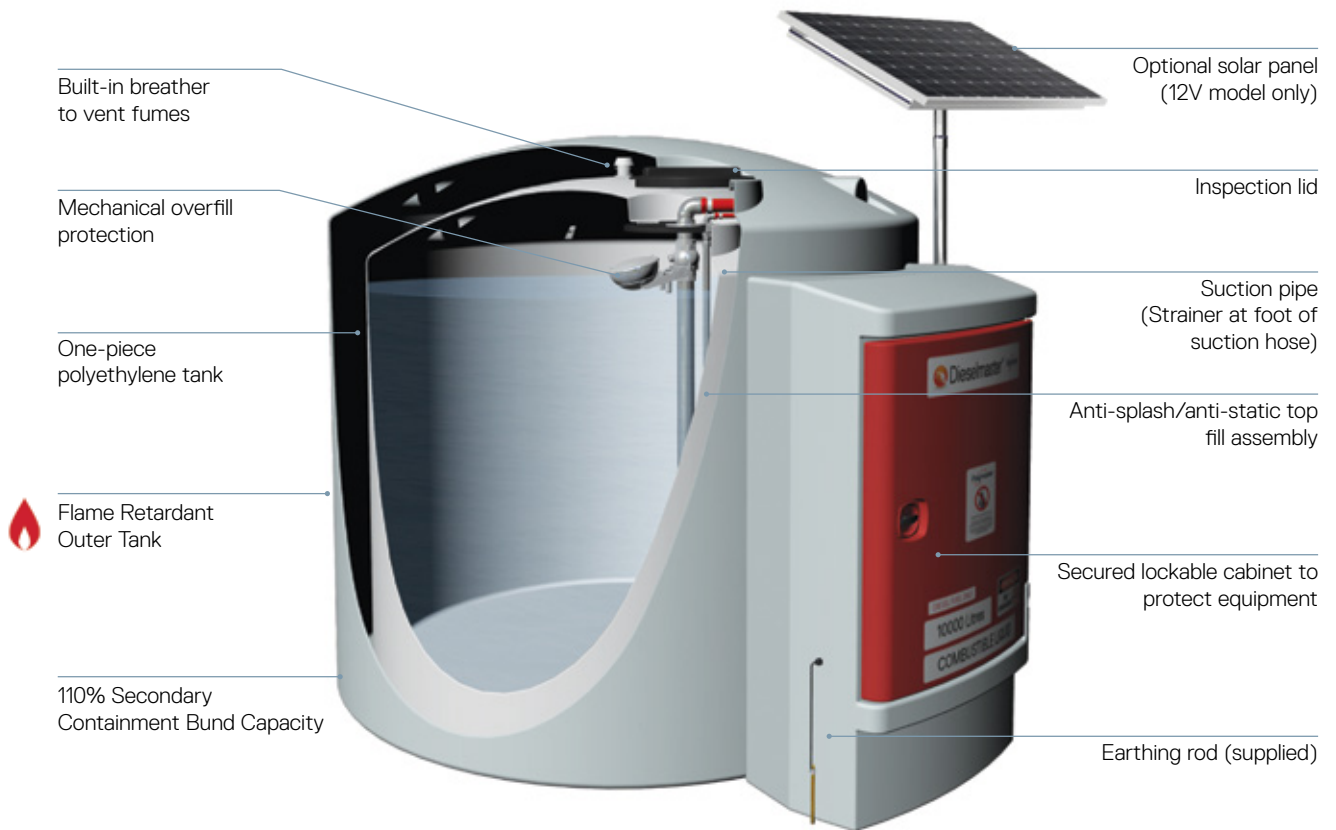

Cabinet Details (Essential Model Shown)

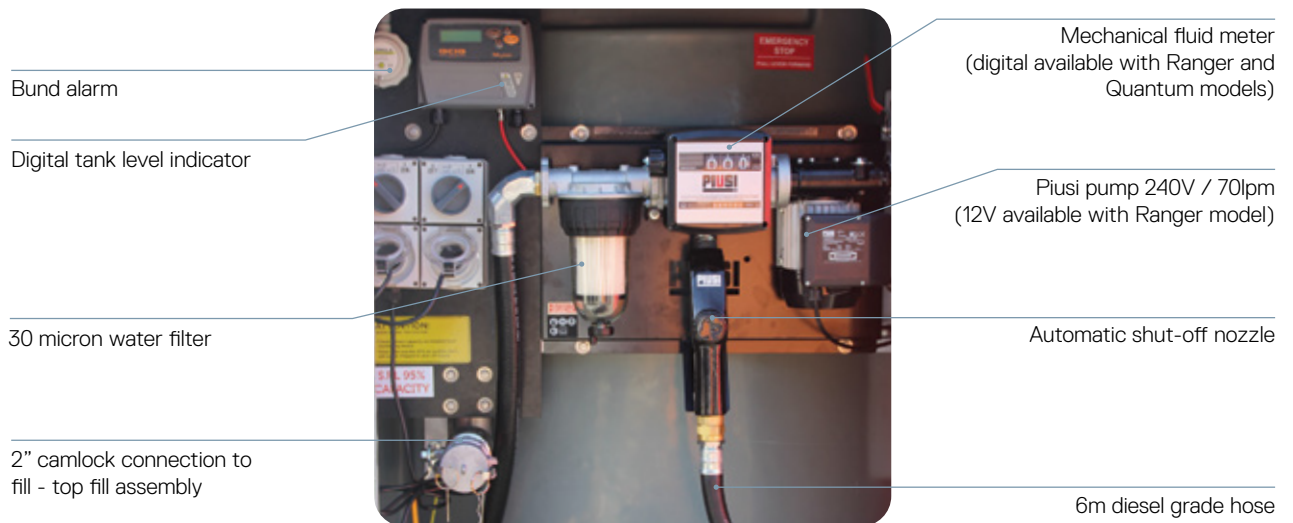



(Image for illustrative purposes only)

| FEATURES | ESSENTIAL | RANGER | QUANTUM |
|--|-----------|--------|---------|
| Power supply - 240V | ✓ | ✓ | ✓ |
| Power supply - 12V | - | ✓ | - |
| 70LPM Piusi pump | ✓ | ✓ | ✓ |
| 6mtr dispensing hose with auto-shut off trigger nozzle | ✓ | ✓ | - |
| 10mtr hose reel with auto-shutoff trigger nozzle | - | - | ✓ |
| Auto-shutoff nozzle holster | - | ✓ | ✓ |
| 30 micron clear water capture filter - to 150LPM | ✓ | ✓ | ✓ |
| 2" camlock connection to fill - top fill assembly | ✓ | ✓ | ✓ |
| Anti-splash/anti-static top fill assembly | ✓ | ✓ | ✓ |
| Mechanical overfill protection | ✓ | ✓ | ✓ |
| High/Low level electronic audible alarm | - | ✓ | ✓ |
| Bund alarm | ✓ | ✓ | ✓ |
| 110% secondary containment bund capacity | ✓ | ✓ | ✓ |
| Flame retardant outer tank material | ✓ | ✓ | ✓ |
| Digital level indicator | ✓ | ✓ | ✓ |
| Secured lockable cabinet to protect equipment | ✓ | ✓ | ✓ |
| Mechanical fluid meter to measure vehicle usage | ✓ | - | - |
| Digital fluid meter to measure vehicle usage | - | ✓ | ✓ |
| Power control box with auto time out (10mins) & emergency stop | - | ✓ | ✓ |
| Fuel management system for up to 120 users | - | - | ✓ |

Specifications

| CODE | CAPACITY (Litres) | A | B | C | D |
|-----------|-------------------|------|------|------|------|
| DMDS2300 | 2,300 | 1600 | 2160 | 2200 | 2120 |
| DMDS3300 | 3,300 | 1800 | 2130 | 2200 | 2300 |
| DMDS5000 | 5,000 | 2200 | 2080 | 2260 | 2750 |
| DMDS7000 | 7,000 | 2500 | 2190 | 2350 | 3070 |
| DMDS10000 | 10,000 | 2500 | 2520 | 2710 | 3062 |

DIMENSIONS

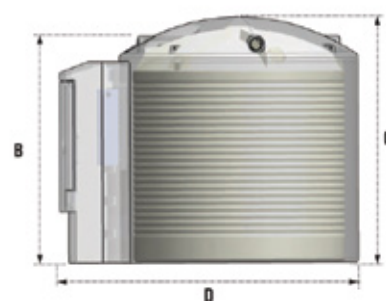

Diesel Dispensing Units

Piisi ST Meter

| CODE | FLOW RATE (LPM) | VOLTAGE | METER | NOZZLE | HOSE LENGTH (m) | HOSE DIAMETER | OUTLET (BSP) |
|-------------|-----------------|---------|-------|--------|-----------------|---------------|--------------|
| STMETER240V | 72 | 240v | K33 | A80 | 4 | 25 | 25 |
| STMETER12V | 56 | 12v | K33 | A80 | 4 | 20 | 20 |

The Piisi ST with Meter is a diesel transfer station for fixed installations with either an AC or DC pump, nozzle (manual or automatic) and a precision meter – K33, for safe and controlled refuelling operations.

Easy to install, this station can be used to fill mobile tanks or interact with distribution units.



KEY FEATURES

- Ready to use
- Easy to install
- Sturdy structure
- High precision meter
- Available with both 12v or 240v pumps

Piisi ST Box

| CODE | FLOW RATE (LPM) | VOLTAGE | METER | NOZZLE | HOSE LENGTH (m) | HOSE DIAMETER | OUTLET (BSP) |
|---------------|-----------------|---------|-------|--------|-----------------|---------------|--------------|
| STBOXMETER12V | 80 | 12v | K33 | A80 | 4 | 25 | 25 |
| STBOXBASIC | 70 | 240v | K33 | A80 | 6 | 25 | 20 |
| STBOXPRO | 70 | 240v | A80 | Auto | 6 | 25 | 25 |

The Piisi ST Box is a diesel refuelling station, complete with pump, flow meter and filter, protected in a lockable metal housing.

The unit is complete with antistatic hose for diesel dispensing and an automatic nozzle.

The Pro model features electronic access control box ACCESS 85.



KEY FEATURES

- Sturdy structure
- Lockable and safe
- Ready to use
- Filtration guaranteed
- Auto Shut-off Nozzle Holster

Piisi Cube

| CODE | FLOW RATE (LPM) | VOLTAGE | METER | NOZZLE | HOSE LENGTH (m) | HOSE DIAMETER | OUTLET (BSP) |
|-------------|-----------------|---------|-------|--------|-----------------|---------------|--------------|
| CUBE56-12V | 56 | 12v | K33 | A60 | 4 | 25 | 25 |
| CUBE70-240V | 70 | 240v | K33 | A60 | 6 | 25 | 20 |

The Piisi Cube is a mechanical fuel transfer dispenser for non-commercial use. The Cube contains a self-priming vane pump fitted with integrated bypass valve, automatic nozzle with swivel connection and integrated nozzle holder with start/stop pump lever.

KEY FEATURES

- Sturdy structure
- Mechanical meter
- Induction thermal-protected motor
- Overload protection
- Built-in mesh filter



Diesel Pumps & Accessories

Diesel Pumps

| CODE | DESCRIPTION | VOLTAGE | POWER (kW) | FLOW (LPM) | INLET | OUTLET | WARRANTY (yrs) | KIT |
|-----------------|-----------------------|---------|------------|------------|-------|--------|----------------|---------|
| DP50PUMP12V-ASY | 50L Diesel Pump | 12v | 0.3 | 50 | 25mm | 25mm | 1 | DP50K |
| DP72PUMP | Panther Diesel Pump | 240v | 0.5 | 72 | 25mm | 25mm | 1 | DP72K |
| DP85PUMP | Fast Flow Diesel Pump | 12v | 0.5 | 85 | 25mm | 25mm | 1 | DP80K |
| DP1224PUMP | Diesel Transfer Pump | 12v/24v | 0.42/0.15 | 70/35 | 25mm | 25mm | 1 | DP3570K |

Pump Kits

| CODE | CONTENTS |
|---------|---|
| DP50K | Pump, 4m Hose & Automatic Shutoff Nozzle |
| DP72KA | Pump, Mechanical Meter, Water Capture Filter, 6m Hose, Automatic Shutoff Nozzle |
| DP85K | Pump, 4m Hose, Automatic Shutoff Nozzle |
| DP1224K | Pump, 4m Hose, Automatic Shutoff Nozzle |



Smart Diesel Dispensing

Piusi MC Box B.Smart

Simple, intuitive, smart fuel management system. An intuitive and simple Fuel Management System – composed of hardware and software (app for drivers and a Cloud based web app for fleet managers), driven by Bluetooth technology to easily monitor and manage any fleet; from the biggest to the smallest.

CODE

BSFMS

The All-In-One Fuel Management System

No need for software to be installed on a PC: B.SMART works in the Cloud and allows you to monitor all fuel transactions in real time, from any site where MCBOX B.SMART is installed. Communication between MCBOX B.SMART, Phone App and Cloud Software is simple.

When the driver opens the B.SMART App from his Android or iOS device, the smartphone or tablet automatically connects to MCBOX B.SMART to authorise refuelling.

During the refill, the driver can keep track of the quantity dispensed on his device and once finished, he can view the virtual receipt, which will also be sent in real time to the Cloud Software.

At the same time the fleet manager can, from the simple graphic interface of the Cloud Software, manage and monitor in real time all supplies made by distributors and on fleets of all sizes.



BSFMS

Diesel Accessories

| CODE | DESCRIPTION |
|-----------------|--|
| ATN65 | 65LPM Diesel Auto Nozzle |
| ATN90 | 90LPM Diesel Auto Nozzle |
| BM35TNB-RES | 35L AdBlue Reservoir Tank for Cube |
| BMCB-D | Diesel MC Box |
| BYS20 | Strainer - suits all Ute Packs |
| CLG-D | Diesel Clock Level Gauge |
| D-CONNECT2KIT | Diesel Connection Hose to Kits |
| DCF25F | Clear Captor Filter Cartridge 150LPM |
| DCF25CLF | Clear Captor Filter Cartridge 70LPM |
| DHR10M25 | 10m Diesel Retractable Hose Reel |
| DH2025-4M | 4m Diesel hose - 20 x 25 Male connectors |
| DH2025-6M | 6m Diesel hose - 20 x 25 Male connectors |
| DH2020-4M | 4m Diesel hose - 20 x 20 Male connectors |
| DH2020-6M | 6m Diesel hose - 20 x 20 Male connectors |
| DFG200 | Diesel Fuel Gauge 200L |
| DFG400 | Diesel Fuel Gauge 400L |
| DFG600 | Diesel Fuel Gauge 600L |
| DFG800 | Diesel Fuel Gauge 800L |
| DMDMFC | Metal Filling Cap (Ute Pack) |
| DMDT | Digital Turbine Meter |
| DMLI | Diesel Level Indicator (OCIO) |
| DMM4 | 4 Digit Mechanical Meter |
| DMPQ400BUND | Diesel Cube Bund |
| DPM | Diesel Pulse Meter |
| FCV | Vented/Breather Filling Cap (Ute Pack) |
| MCBKEYS-RED | MC Box User Keys - Red Manager |
| MCBKEYS | MC Box User Keys (Pk 10) |
| MCBPCIF | MC Box PC Software & USB Convert |
| MCBSW | MC Box Software |
| MTN | Diesel Manual Nozzle |
| SPK | Solar Panel Kit |
| STRUT430MM-200N | Gas Strut to suit DMPQ range |



DPM



DMDT



DMM4



BMCB-D



CLG-D



DHR10M25



ATN90



DCF25F

(head not included)

AdBlue® Storage

AdBlue® Portable Ute Packs



| CODE | DESCRIPTION | CAPACITY (Litres) | DIMENSIONS (L x W x H) | PUMP | PUMP FLOW (LPM) | HOSE LENGTH (m) | MOUNTING FRAMES |
|------------|---------------------|-------------------|------------------------|------------|-----------------|-----------------|-----------------|
| BM100-B | Tank + 12 Volt Pump | 100 | 770 x 540 x 500 | B12V-COMET | 17 | 4 | DM100MF |
| BM200B-P12 | Tank + 12 Volt Pump | 200 | 1000 x 750 x 605 | B12VP-P | 35 | 4 | DM200MF |
| BM400B-P12 | Tank + 12 Volt Pump | 400 | 1620 x 750 x 665 | B12VP-P | 35 | 4 | DM400MF |

AdBlue® Single Skin Slimline Tanks

| CODE | COLOUR | CAPACITY (Litres) | DIMENSIONS (L x W x H) |
|-------------|------------|-------------------|------------------------|
| BMSL2000RPB | Rapid Blue | 2,000 | 2590 x 750 x 2110 |
| BMSL3000RPB | Rapid Blue | 3,000 | 2870 x 940 x 2150 |
| BMSL5000RPB | Rapid Blue | 5,000 | 3590 x 1170 x 2110 |



AdBlue® Accessories

| CODE | DESCRIPTION |
|---------|---|
| B12K-P | IBC Kit - 12V |
| BATN-P | AdBlue® Auto Shutoff Nozzle (Puisi) |
| BDM-P | AdBlue® Pluse Meter |
| BDRHP-P | AdBlue® Rotary Hand Pump |
| BMCB-A | AdBlue® McBox |
| BMHR8-P | AdBlue® Hose Reel Retractable 20mm x 8m |
| BMLI | Level Indicator (Ocio) AdBlue® |
| BMTN-P | Nozzle Manual AdBlue® - Plastic (Puisi) |



AdBlue® Single Skin Slimline Tank cabinet

| CODE | DESCRIPTION | CAPACITY (Litres) | DIMENSIONS (L x W x H) | PUMP | PUMP FLOW (LPM) | HOSE LENGTH (m) |
|---------------|---------------------------------|-------------------|------------------------|----------|-----------------|-----------------|
| BMSL5000LGY-C | Slimline AdBlue® Tank - Cabinet | 5,000 | 4140 x 1170 x 2110 | B240VP-P | 35 | 5 |

KEY FEATURES

- Optimised Fleet Solutions for AdBlue® storage and dispensing to SCR/DEF equipped vehicles.
- Simplifies dispensing operation
- Plug 'n' play set up for fast installation



Water Cartage

Water Cartage Tanks



| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | OUTLET |
|---------|-------------------|------------------------|--------|
| FTR600 | 600 | 1150 x 1130 x 740 | 40mm |
| FTR800 | 800 | 1400 x 1200 x 740 | 40mm |
| FTR1200 | 1200 | 1450 x 1200 x 1000 | 40mm |
| FTR2000 | 2000 | 1900 x 1450 x 1100 | 40mm |
| FTR3000 | 3000 | 2100 x 1500 x 1200 | 40mm |



KEY FEATURES

- Moulded internal baffles for vehicle stability
- Brass outlet
- Forklift galvanised skids available
- Tough and durable one-piece moulding
- 400mm 1/4 turn hinged lid
- Sits directly on any flat surface
- High strength, lightweight polyethylene construction
- Provision for strap or pin mounting



Water Cartage Tanks - Ute Pack

| CODE | CAPACITY (Litres) | DIMENSIONS (L x W x H) | OUTLET |
|---------|-------------------|------------------------|--------|
| FTR200 | 200 | 1050 x 750 x 600 | 25mm |
| FTR400 | 400 | 1680 x 750 x 600 | 25mm |
| FTR600U | 600 | 1720 x 890 x 755 | 25mm |
| FTR800U | 800 | 1720 x 890 x 925 | 25mm |



KEY FEATURES

- Moulded internal baffles for vehicle stability
- Brass outlet
- Mounting frames available
- Tough and durable one-piece moulding
- 140mm 1/4 turn hinged lid
- High strength, lightweight polyethylene construction
- Provision for strap or pin mounting
- Wear pads to allow airflow underneath and protect ute tray

Compact Fire Fighting Packages



| CODE | CAPACITY (Litre) | DIMENSIONS (L x W x H) | PUMP CODE | ENGINE/PUMP | STARTER | HP |
|--------------|------------------|------------------------|-----------|-------------|-------------|-----|
| FTRC200-25 | 200 | 1050 X 750 X 600 | MB25L | Loncin/Onga | Pull Petrol | 2.5 |
| FTRC200-55 | 200 | 1050 X 750 X 600 | B55H | Honda/Onga | Pull Petrol | 5.5 |
| FTRC400-25 | 400 | 1680 X 750 X 600 | MB25L | Loncin/Onga | Pull Petrol | 2.5 |
| FTRC400-55 | 400 | 1680 X 750 X 600 | B55H | Honda/Onga | Pull Petrol | 5.5 |
| FTRC600-25 | 600 | 1720 X 890 X 755 | MB25L | Loncin/Onga | Pull Petrol | 2.5 |
| FTRC600-55 | 600 | 1720 X 890 X 755 | B55H | Honda/Onga | Pull Petrol | 5.5 |
| FTRC800-25 | 800 | 1720 X 890 X 925 | MB25L | Loncin/Onga | Pull Petrol | 2.5 |
| FTRC800-55 | 800 | 1720 X 890 X 925 | B55H | Honda/Onga | Pull Petrol | 5.5 |
| FTRC800-65-T | 800 | 1720 x 890 x 925 | B65HT | Honda/Onga | Pull Petrol | 6.5 |

KEY FEATURES

- Mounting frames available
 - Tough and durable one-piece moulding
 - Sits directly on any flat surface
 - High strength, lightweight polyethylene construction
 - 12m hose with fire fighting nozzle
 - Wear pads to allow airflow underneath and protect ute tray
 - Provision for strap or pin mounting
- *Refer to Water Cartage & Fire Fighting Pumps page 61 for full pump details



Skid Mounted Fire Fighting Packages



| CODE | CAPACITY (Litres) | STARTER | DIMENSIONS (L x W x H) | ENGINE* |
|------------|-------------------|-------------------|------------------------|---------|
| FTRS600 | 600 | Pull-Petrol | 1800 x 1400 x 850 | B65HT |
| FTRS600ES | 600 | Electric- Starter | 1800 x 1400 x 850 | B65HTES |
| FTRS800 | 800 | Pull-Petrol | 1900 x 1400 x 850 | B65HT |
| FTRS800ES | 800 | Electric- Starter | 1900 x 1400 x 850 | B65HTES |
| FTRS1200 | 1200 | Pull-Petrol | 1900 x 1400 x 1100 | B65HT |
| FTRS1200ES | 1200 | Electric- Starter | 1900 x 1400 x 1100 | B65HTES |
| FTRS2000 | 2000 | Pull-Petrol | 2100 x 1800 x 1200 | B65HT |
| FTRS2000ES | 2000 | Electric- Starter | 2100 x 1800 x 1200 | B65HTES |

KEY FEATURES

- 6.5HP Honda twin-impeller pump
 - 36m hose reel and fire fighting nozzle included
 - Heavy duty galvanised skid frame
 - Fork on - fork off capability
 - Bottom fill manifold with 6m suction hose
 - Optional dust suppression nozzle kit available (DSN20K)
- *Refer to Water Cartage & Fire Fighting Pump page 61 for full pump details

Skids

| CODE | COMPATIBILITY | DIMENSIONS L x W x H |
|-------------|-------------------------|----------------------|
| FFS600 | 600Ltr FTR Tanks | 1595 x 1120 x 115 |
| FFS800-1200 | 800 - 1200Ltr FTR Tanks | 1745 x 1350 x 115 |
| FFS2000 | 2000Ltr FTR Tanks | 1940 x 1690 x 115 |



FTRS2000

Trailer Packages

Fire Fighting Trailers



| CODE | CAPACITY (Litres) | PUMP* | STARTER | ENGINE/PUMP | TANK DIMENSIONS (L x W x H) | TRAILER DIMENSIONS (L x W x H) |
|--------------|-------------------|---------|-------------------|-------------|-----------------------------|--------------------------------|
| FTRT1200T | 1200 | B65HT | Pull - Petrol | Honda/Onga | 1450 x 1200 x 1000 | 3940 x 1770 x 1500 |
| FTRT1200TES | 1200 | B65HTES | Electric - Petrol | Honda/Onga | 1450 x 1200 x 1000 | 3940 x 1770 x 1500 |
| FTRT1200TESD | 1200 | --- | Electric - Diesel | Yanmar/Onga | 1450 x 1200 x 1000 | 3940 x 1770 x 1500 |
| FTRT2000 | 2000 | B65HT | Pull - Petrol | Honda/Onga | 1900 x 1450 x 1200 | 4460 x 1970 x 1650 |
| FTRT2000ES | 2000 | B65HTES | Electric - Petrol | Honda/Onga | 1900 x 1450 x 1200 | 4460 x 1970 x 1650 |
| FTRT2000ESD | 2000 | FFDPTES | Electric - Diesel | Yanmar/Onga | 1900 x 1450 x 1200 | 4460 x 1970 x 1650 |

KEY FEATURES - TRAILER

- Hot dip galvanised dual axle trailer
- 14" wheels - 5 stud pattern
- Electric brakes on 2000 ltr unit
- Road pack including brakes and LED lights
- Emergency breakaway protection
- Compliance plate - road registrable

KEY FEATURES - TANK AND PUMP

- 6.5HP Honda powered twin impeller pump
- 400mm 1/4 turn hinged lid
- Trailer mounted toolbox to protect the hose
- Suction return manifold with 6m suction hose
- 36m Hose reel & fire fighting nozzle
- Optional dust suppression nozzle kit available (DSN20K)
- *Refer to Water Cartage & Fire Fighting Pumps page for full pump details

FTRT1200TES



Water Cartage & Fire Fighting Pumps

| CODE | DESCRIPTION | ENGINE/ PUMP | STARTER | POWER (HP) | HEAD (m) | FLOW (LPM) | INLET | OUTLET | # OF OUTLETS | WARRANTY (yrs) |
|---------|--|--------------|-------------------|------------|----------|------------|-----------|-----------------------|--------------|----------------|
| MB25L | Mini Blaze 2.5HP | Loncin/Onga | Pull - Petrol | 2.5 | 21 | 133 | 25mm BSPM | 25mm BSPM | 1 | 1 |
| B55H | Honda 5.5HP Single Impeller | Honda/Onga | Pull - Petrol | 5.5 | 60 | 585 | 32mm BSPM | 25mm, 25mm, 40mm BSPM | 3 | 2 |
| B65HT | Honda 6.5HP Twin Impeller | Honda/Onga | Pull - Petrol | 6.5 | 100 | 373 | 50mm BSPM | 25mm, 25mm, 40mm BSPM | 3 | 2 |
| B65HTES | Honda 6.5HP Twin Impeller Electric Start | Honda/Onga | Electric - Petrol | 6.5 | 100 | 373 | 50mm BSPM | 25mm, 25mm, 40mm BSPM | 3 | 2 |
| FFDPTES | Yanmar 7HP Diesel Electric Start | Yanmar/Onga | Electric - Diesel | 7 | 100 | 450 | 50mm BSPM | 25mm, 25mm, 40mm BSPM | 3 | 2 |



Fire Fighting Accessories


| CODE | DESCRIPTION | DIMENSIONS (L x W x H) |
|--------|---|------------------------|
| FFHR1 | Hose Reel Only 20mm x 36mtr | 555 DIA x 165W |
| TFFK | Tank Fire Fighting Kit with 36mtr Hose reel on galvanised stand | 900 x 600 x 700 |
| FHR | Manual Hose Reel 20mm x 36mtr | 427 x 391 x 380 |
| DSN20K | Dust Suppression Nozzle | |



* Does not include hose



* Does not include hose

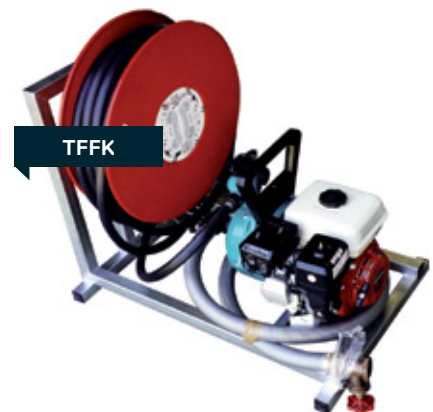

Safety & Spill Containment

| CODE | DESCRIPTION | DIMENSIONS (L x W x H) |
|----------|---------------------------------------|---------------------------|
| IBCB1100 | IBC Bund 1100L | 1680 x 1680 x 700 |
| LSS1 | Lead safe stand | 500 x 500 x 2100 |
| FHRC36 | Fire Hose Reel Cover - suits 36m hose | 600 x 205 x 580 |
| FHRC50 | Fire Hose Reel Cover - suits 50m hose | 575 x 270 x 600 |
| PTC6 | Drum top cover to suit 205ltr | 600 x 600 x 300 |
| BCL | Bollard Cover - Large | Ø200 x 1780H |
| BCS | Bollard Cover - Small | Ø120 x 1780H |
| BT1 | Butt Tidy | Ø410 x 1000H |
| DSBAR | Bund-a-rack | 1280 x 1280 x 280 |
| DSDB2 | Drumsafe two drum bund | 1550 x 75 x 450 |
| DSDP | Drumsafe Drumpak | Ø780 x 1080H |
| DSEP4 | Drumsafe Econopallet 4 Drum | 1210 x 1210 x 300 |
| DSP | Drumsafe Bundled Pallet | 1280 x 1280 x 335 |
| DSST1 | Splash Tray 1 Drum | 830 x 830 x 100 |
| DSST2 | Splash Tray 2 Drum | 1560 x 810 x 145 |
| DSST4 | Splash Tray 4 Drum | 1210 x 1210 x 100 |



AGRICULTURE

Order Form



T 03 5033 9000 E sales@polymaster.com.au W polymaster.com.au

| | |
|------------------------------|---|
| Date: _____ | Site Contact name: _____ |
| Distributor: _____ | Delivery Address (if not to store): _____ |
| Distributor ID number: _____ | _____ |
| _____ | Phone: _____ |
| Contact name: _____ | Email: _____ |
| Phone: _____ | Order no. (required) _____ |

| NO | PRODUCT CODE | DESCRIPTION | COLOUR | QTY | UNIT PRICE (EX.GST) |
|----|--------------|-------------|--------|---------|---------------------|
| 1 | | | | | |
| 2 | | | | | |
| 3 | | | | | |
| 4 | | | | | |
| 5 | | | | | |
| | | | | FREIGHT | |
| | | | | TOTAL | |

| ADDITIONAL OPTIONS | SIZE REQUIRED | QTY | UNIT PRICE | AMOUNT |
|---|---------------|-----|------------|--------|
| UPGRADE OUTLET? YES <input type="checkbox"/> NO <input type="checkbox"/> | | | | |
| ADDITIONAL OUTLET? YES <input type="checkbox"/> NO <input type="checkbox"/> | | | | |
| MANHOLE COVER INSTEAD OF STRAINER? <input type="checkbox"/> MANHOLE COVER IN ADDITION TO STRAINER? <input type="checkbox"/> | | | | |
| ACCESSORIES REQUIRED? YES <input type="checkbox"/> NO <input type="checkbox"/> | | | | |

FILL IN ADDITIONAL DETAILS BELOW FOR TANK ORDERS ONLY - SELECT FITTING POSITIONS

Outlet: _____
Overflow: _____

Outlet: _____
Overflow: _____

Outlet: _____
Overflow: _____

* Minimum order \$300
* Tank specs available at polymaster.com.au

Email to sales@polymaster.com.au to place your order

Disclaimer: Colours and sizes may vary from details printed

Delivery & Installation

It is the owner's responsibility to provide clear access to site, and to secure tank/s left at site.

If the driver cannot reach the location, the tank/s will be left at the closest practical & safe position at the driver's discretion. If a tank can not be left at site, the owner will incur a redelivery charge.

All products can be delivered throughout Australia. Call us for a quote for deliveries outside nominated zones.

Nominated Zones Free Delivery

Polymaster offers free delivery to site throughout most of Victoria, South Australia and parts of Southern New South Wales for tanks exceeding 13,000ltrs (remote areas excluded). Please refer to our free delivery zone map on polymaster.com.au/delivery-installation.

All tanks less than 13,000ltrs are delivered free to store (within the nominated zone). A delivery fee will be incurred to deliver these tanks to site.

Delivery Requirements

Clearance required for truck and trailer is 19m long, 5m high, 3.5m wide. To put this into perspective, our trucks are longer than a semi-trailer.

In accordance with OH&S requirements, the customer must be present at the time of delivery. If this is not possible, arrangement must be made with the distributor, friends or neighbours to ensure truck driver will have the necessary assistance as listed below.

| Up to 13,500ltrs | 13,500-22,500ltrs | 31,700ltrs | 50,000ltrs |
|-----------------------|-----------------------|-----------------------|-----------------------|
| 1 person (+driver) | 2 person (+driver) | 3 person (+driver) | 1 person (+driver) |

Note:

- It is the Owners responsibility to position the tank on the pad and to connect the tank.
- Please refer to lifting instructions (Polymaster.com.au/delivery-installation) for tanks greater than 25,000ltrs as lifting equipment will be required to position on the pad by the Owner.

Underground and Septic Tanks will require a lifting device (forklift etc) to unload from the truck. This is not supplied by the driver.

Re-Scheduling Fee

Please be advised that if the Owner chooses to change the delivery date a re-scheduling fee will be incurred.

Installation Guide

Entry to tank is not required when installing a Polymaster tank!

The tank site must be firm, level and flat.

A concrete pad (min dia. of tank), or well compacted sand base or other consolidated fill such as crushed dust is recommended. This fill must be free of any rocks, stones or any sharp objects.

The sand base or other consolidated fill base must be 75mm – 100mm deep and at least 600mm larger in diameter than the tank base. The outside of the base must be supported by a retaining wall to prevent erosion.

The overflow must be piped well clear of the tank to avoid any undermining of the tank base.

Ensure that a flexible hose of at least 300 mm (12") is installed after the tank valve to absorb any shocks or movement.

If tank is placed on a stand, support pipework off the stand, never support pipework off the tank.



Note: Failure to properly install tank as per instructions will void warranty. Never enter a tank alone. Have an attendant stand by. Restricted Space - only enter after carrying out a Hazard Identification Risk Assessment (H.I.R.A.).

Index A - F

| PRODUCT CODE | PAGE |
|--------------|-------|
| A | |
| A60 | 56 |
| A80 | 56 |
| AFV0L | 36 |
| AFV2 | 36 |
| AFV2L | 25 |
| AFV2LB | 20/25 |
| AFV2RKIT | 36 |
| AFV2SEAL | 36 |
| AFV3 | 36 |
| AFV3B | 36 |
| AFV4 | 36 |
| AFV4B | 36 |
| AFV5 | 36 |
| AFV5B | 36 |
| AFV6 | 36 |
| AFV6L | 36 |
| APRS | 23 |
| ATN65 | 59 |
| ATN90 | 59 |

| | |
|---------------|-------------|
| B | |
| B12K-P | 60 |
| B12V-COMET | 60 |
| B12VP-P | 60 |
| B55H | 62/65 |
| B65HT | 62/63/64/65 |
| B65HTES | 63/64/65 |
| B240VP-P | 60 |
| BATN-P | 60 |
| BB12 | 46 |
| BB12L | 46 |
| BB12XL | 46 |
| BB16 | 46 |
| BB16L | 46 |
| BB16XL | 46 |
| BBLID | 46 |
| BC | 39/42 |
| BCL | 66 |
| BCS | 66 |
| BDM-P | 60 |
| BDRHP-P | 60 |
| BM35TNB-RES | 59 |
| BM100-B | 60 |
| BM200B-P12 | 60 |
| BM400B-P12 | 60 |
| BMCB-A | 60 |
| BMCB-D | 59 |
| BMHR8-P | 60 |
| BMLI | 60 |
| BMSL2000RPB | 60 |
| BMSL3000RPB | 60 |
| BMSL5000LGY-C | 60 |
| BMSL5000RPB | 60 |
| BMTN-P | 60 |
| BSFMS | 58 |
| BSLT2020H4 | 13 |

| PRODUCT CODE | PAGE |
|--------------|----------|
| BSLT2020H5 | 13 |
| BSLT2020PC | 13 |
| BT1 | 66 |
| BUC14 | 49 |
| BUC26 | 49 |
| BV1.5 | 15 |
| BV1.5A | 11/14/15 |
| BV2A | 11/14/15 |
| BYS20 | 59 |

| | |
|-------------|-------|
| C | |
| CF5L | 39 |
| CF5P | 38 |
| CF12L | 39 |
| CF12P | 38 |
| CF13L | 39 |
| CF13P | 38 |
| CFA1 | 25 |
| CFA2 | 25 |
| CFAC | 25 |
| CFANT | 25 |
| CFS1 | 25 |
| CFS2 | 25 |
| CFT8 | 34 |
| CFT8E | 34 |
| CLG | 24/59 |
| CUBE56-12V | 56 |
| CUBE70-240V | 56 |
| CVB20 | 24 |

| | |
|---------------|-------------|
| D | |
| DC2 | 36/41/42 |
| DC3 | 29/30/31/36 |
| DC3SE | 36 |
| DCF25CLF | 59 |
| DCF25F | 59 |
| D-CONNECT2KIT | 59 |
| DCSE | 36/42 |
| DFG200 | 59 |
| DFG400 | 59 |
| DFG600 | 59 |
| DFG800 | 59 |
| DH2020-4M | 59 |
| DH2020-6M | 59 |
| DH2025-4M | 59 |
| DH2025-6M | 59 |
| DHJ600 | 15/27 |
| DHJ800 | 27 |
| DHR10M25 | 59 |
| DM100MF | 50/60 |
| DM200MF | 50/60 |
| DM400MF | 50/60 |
| DM600MF | 50 |
| DM800MF | 50 |
| DM1200 | 51 |
| DM2000 | 51 |
| DM3000 | 51 |
| DMDMFC | 59 |

| PRODUCT CODE | PAGE |
|-----------------|----------|
| DMDS2300 | 55 |
| DMDS3300 | 55 |
| DMDS5000 | 55 |
| DMDS7000 | 55 |
| DMDS10000 | 55 |
| DMDT | 59 |
| DMLI | 59 |
| DMM4 | 59 |
| DMP100E | 50 |
| DMP200E | 50 |
| DMP400E | 50 |
| DMP600 | 51 |
| DMP600E | 50 |
| DMP800 | 51 |
| DMP800E | 50 |
| DMP1200 | 51 |
| DMP2000 | 51 |
| DMP3000 | 51 |
| DMPD600 | 51 |
| DMPD800 | 51 |
| DMPD1200 | 51 |
| DMPD2000 | 51 |
| DMPD3000 | 51 |
| DMPF600 | 51 |
| DMPF800 | 51 |
| DMPF1200 | 51 |
| DMPF2000 | 51 |
| DMPF3000 | 51 |
| DMPFT1200 | 52 |
| DMPFT2000 | 52 |
| DMPG400BUND | 59 |
| DMPG400E | 50 |
| DP2 | 32/33/36 |
| DP4B | 36 |
| DP50K | 57 |
| DP50PUMP | 50 |
| DP50PUMP12V-ASY | 51/57 |
| DP72K | 57 |
| DP72KA | 57 |
| DP72PUMP | 57 |
| DP80K | 57 |
| DP85K | 57 |
| DP85PUMP | 52/57 |
| DP85PUMP12V | 51 |
| DP1224K | 57 |
| DP1224PUMP | 57 |
| DP1224PUMP12V | 51 |
| DP3570K | 57 |
| DPK1 | 24 |
| DPK1EXT | 24 |
| DPM | 59 |
| DPSE | 36 |
| DSBAR | 66 |
| DSDB2 | 66 |
| DSDP | 66 |
| DSEP4 | 66 |
| DSN20K | 63/64/65 |
| DSP | 66 |
| DSST1 | 66 |

| PRODUCT CODE | PAGE |
|--------------|------|
| DSST2 | 66 |
| DSST4 | 66 |
| DSW5000LGY | 53 |
| DSW7000LGY | 53 |
| DSW10000LGY | 53 |

| | |
|--------------|-------|
| F | |
| FCV | 59 |
| FFDPTES | 64/65 |
| FFHR1 | 65 |
| FFS600 | 63 |
| FFS800-1200 | 63 |
| FFS2000 | 63 |
| FHR | 65 |
| FHRC36 | 66 |
| FHRC50 | 66 |
| FLBF | 39 |
| FRB | 35 |
| FSB200 | 43 |
| FST100 | 43 |
| FST200 | 43 |
| FST300 | 43 |
| FSTL30 | 43 |
| FSTL1020 | 43 |
| FT200 | 23 |
| FT500B | 23/24 |
| FT1000B | 23 |
| FT2000B | 23 |
| FT2000B+V | 23 |
| FT5000B | 23 |
| FT5000B+V | 23 |
| FT9000B | 23/24 |
| FT9000B+V | 23 |
| FTL2000 | 23/37 |
| FTP9 | 34/36 |
| FTR200 | 61 |
| FTR400 | 61 |
| FTR600 | 61 |
| FTR600U | 61 |
| FTR800 | 61 |
| FTR800U | 61 |
| FTR1200 | 61 |
| FTR2000 | 61 |
| FTR3000 | 61 |
| FTRC200-25 | 62 |
| FTRC200-55 | 62 |
| FTRC400-25 | 62 |
| FTRC400-55 | 62 |
| FTRC600-25 | 62 |
| FTRC600-55 | 62 |
| FTRC800-25 | 62 |
| FTRC800-55 | 62 |
| FTRC800-65-T | 62 |
| FTRS600 | 63 |
| FTRS600ES | 63 |
| FTRS800 | 63 |
| FTRS800ES | 63 |
| FTRS1200 | 63 |
| FTRS1200ES | 63 |

Index F - P

| PRODUCT CODE | PAGE |
|--------------|------|
| FTRS2000 | 63 |
| FTRS2000ES | 63 |
| FTRT1200T | 64 |
| FTRT1200TES | 64 |
| FTRT1200TESD | 64 |
| FTRT2000 | 64 |
| FTRT2000ES | 64 |
| FTRT2000ESD | 64 |

G

| | |
|---------|----|
| GAB2 | 37 |
| GABS | 37 |
| GBL | 45 |
| GBLLIDN | 45 |
| GRF400 | 37 |
| GS40 | 37 |

H

| | |
|-------------|----------|
| HB16 | 43 |
| HGF13 | 37 |
| HHR-370PC | 26 |
| HHR-370S-PC | 14/16/26 |
| HL4 | 42 |
| HSJ1000 | 27 |
| HSP | 43 |
| HT28 | 49 |
| HT28P | 49 |
| HTP750VR | 23 |

I

| | |
|----------|----|
| IBCB1100 | 66 |
| IRS32 | 25 |
| IRS40 | 25 |

J

| | |
|---------|----|
| JOS10 | 24 |
| JOS65 | 24 |
| JOS90 | 24 |
| JOS1210 | 24 |
| JWK | 42 |

K

| | |
|-----|----|
| K33 | 56 |
|-----|----|

L

| | |
|-----------|-------|
| LFT50KL | 22 |
| LFT9000 | 22 |
| LFT13600 | 22 |
| LFT22500 | 22 |
| LFT31700 | 22 |
| LFTK | 22 |
| LGSO | 24 |
| LHO3SS | 22/25 |
| LHO1.5 | 12/16 |
| LHO1.5SS | 25 |
| LHO1.25SS | 25 |

| PRODUCT CODE | PAGE |
|--------------|-------|
| LHO1SS | 25 |
| LHO2 | 12 |
| LHO2SS | 22/25 |
| LHO3 | 12 |
| LLFC | 36 |
| LQ01 | 22/24 |
| LSS1 | 66 |
| LT | 39/42 |
| LT01 | 24 |
| LWD | 24 |

M

| | |
|-------------|----------------|
| MB25L | 62/65 |
| MB60L | 46 |
| MB60P | 46 |
| MB100L | 46 |
| MB100P | 46 |
| MB150L | 46 |
| MB150P | 46 |
| MB200L | 46 |
| MB200P | 46 |
| MBL | 39 |
| MBP | 38 |
| MCBKEYS | 59 |
| MCBKEYS-RED | 59 |
| MCBPCIF | 59 |
| MCBSW | 59 |
| MG2W | 42 |
| MG4M | 40/42 |
| MG4W | 42 |
| MG5M | 40/42 |
| MG6M | 40/42 |
| MG40P | 40 |
| MG50LTAP | 40 |
| MG50P | 40 |
| MG50TAP | 40 |
| MG60P | 40 |
| MG400T | 40 |
| MG800T | 40 |
| MGD1 | 42 |
| MGD2 | 42 |
| MHC1 | 24 |
| MHC3 | 11/24 |
| MHC4 | 11/24 |
| MHC5 | 11/24 |
| MHC6 | 11/12/24 |
| MHC7 | 12 |
| MHC8 | 13/14/15/16/24 |
| MHC9 | 14/24 |
| MHCA | 11/12/24 |
| MHR20-370 | 13/26 |
| MHR20-550 | 13/26 |
| MM1L | 39 |
| MM1P | 38 |
| MM5BR | 38/39/42 |
| MM5L | 39 |
| MM5P | 38 |
| MM8L | 39 |
| MM8P | 38 |

| PRODUCT CODE | PAGE |
|--------------|----------|
| MM12BR | 38/39/42 |
| MM12L | 39 |
| MM12P | 38 |
| MM13L | 39 |
| MM13P | 38 |
| MM20L | 39 |
| MM20P | 38 |
| MMT400 | 40 |
| MOL50KL | 21 |
| MOL13600 | 21 |
| MOL22500 | 21 |
| MOL31700 | 21 |
| MT2 | 29/36 |
| MT04 | 29/36 |
| MT05 | 29/36 |
| MT6 | 29/36 |
| MT12 | 29/36 |
| MT24 | 29/36 |
| MT45 | 29/36 |
| MTFC | 29/36 |
| MTN | 59 |
| MTP110 | 42 |
| MTR0-2 | 44 |
| MTR0-4 | 44 |
| MTR1-2 | 44 |
| MTR1-4 | 44 |
| MTR2-2 | 44 |
| MTR2-4 | 44 |
| MTR2-LGEKIT | 44 |

O

| | |
|-------|----|
| OFF9 | 24 |
| OFF10 | 24 |
| OFFP | 24 |
| OS9 | 24 |

P

| | |
|------------|-------|
| PBL85 | 45 |
| PBL100 | 45 |
| PBL145 | 45 |
| PBLD | 45 |
| PC01 | 15/24 |
| PCR2000 | 12 |
| PCR4000 | 12 |
| PCR5000 | 12 |
| PCR7000 | 12 |
| PCR10000 | 12 |
| PCR13500 | 12 |
| PCR22500 | 12 |
| PCR27000 | 12 |
| PCST2000 | 16 |
| PCST2000AP | 16 |
| PCST3000 | 16 |
| PCST3000AP | 16 |
| PCT | 38/42 |
| PCTL12 | 33 |
| PCTL24 | 33 |
| PCTR22 | 33 |

| PRODUCT CODE | PAGE |
|--------------|----------|
| PCTR66 | 33 |
| PCTR120 | 33 |
| PH400 | 27 |
| PH550 | 27 |
| PHGPS | 27 |
| PLT50KL | 20 |
| PLT9000 | 20 |
| PLT13600 | 20 |
| PLT22500 | 20 |
| PLT31700 | 20 |
| PLTIP25 | 25 |
| PLTIP40 | 25 |
| POB20 | 43 |
| PPB100 | 45 |
| PPB100FC | 45 |
| PPBL | 45 |
| PSC | 43 |
| PT02 | 41/42 |
| PT02FS | 41/42 |
| PT02STBR | 41/42 |
| PT03 | 41/42 |
| PT03R | 41/42 |
| PT04WC | 41/42 |
| PT05 | 34 |
| PT05C | 34 |
| PT05R | 34 |
| PT10W | 29 |
| PT11W | 29 |
| PT12W | 29 |
| PT13W | 29 |
| PT14 | 41/42 |
| PT14BR | 41/42 |
| PT15 | 41/42 |
| PT48W | 41/42 |
| PT48WB | 41/42 |
| PT49BR | 41/42 |
| PT49BRS | 41 |
| PT49W | 36/41/42 |
| PT49WB | 41/42 |
| PT50W | 36/41/42 |
| PT50WB | 41/42 |
| PT90BRS | 41 |
| PT90W | 41 |
| PT2132 | 25 |
| PT2140 | 25 |
| PT2150 | 25 |
| PTB25 | 39 |
| PTB32 | 39 |
| PTBL25 | 39 |
| PTBL32 | 39 |
| PTC6 | 66 |
| PTC36F | 34 |
| PTC36I | 34 |
| PTC37F | 34 |
| PTC37I | 34 |
| PTF18 | 41 |
| PTM31F | 34 |
| PTM31W | 31/36 |
| PTM32F | 34 |

Index P - W

| PRODUCT CODE | PAGE |
|--------------|-------|
| PTM32W | 31/36 |
| PTM33F | 34 |
| PTM33W | 31/36 |
| PTM34F | 34 |
| PTM34W | 31/36 |
| PTMFC | 31/36 |
| PTWK6 | 36 |
| PTWK7 | 42 |

R

| | |
|-----------|-------|
| R10112 | 24 |
| RFO1 | 24 |
| RFRB | 35 |
| RFS | 25 |
| RFS2 | 25 |
| RMT | 40/42 |
| RWT50KL | 10/11 |
| RWT200 | 10/11 |
| RWT600 | 10/11 |
| RWT1000 | 10/11 |
| RWT1600 | 10/11 |
| RWT2270LP | 10/11 |
| RWT2270T | 10/11 |
| RWT3300 | 10/11 |
| RWT4500LP | 10/11 |
| RWT4500T | 10/11 |
| RWT5000 | 10/11 |
| RWT7100 | 10/11 |
| RWT9000 | 10/11 |
| RWT13600 | 10/11 |
| RWT22500 | 10/11 |
| RWT31700 | 10/11 |

S

| | |
|-------------|----------------------|
| S2 | 11/25 |
| S3 | 11/12/14/25 |
| S4 | 11/12/13/14/15/16/25 |
| S5 | 11/12/25 |
| SC80-F | 22/25 |
| SCIT | 38/42 |
| SCITP | 42 |
| SCL | 42 |
| SCP | 42 |
| SKD1200 | 51 |
| SKD2000 | 51 |
| SKD3000 | 51 |
| SL5 | 42 |
| SLST600 | 14/15 |
| SLST1050 | 14/15 |
| SLST1050AP | 14 |
| SLST1050GPS | 15 |
| SLST2000 | 14 |
| SLST2000AP | 14 |
| SLST2000GPS | 15 |
| SLST3000 | 14/15 |
| SLST3000AP | 14 |
| SLST3000GPS | 15 |
| SLST5000 | 14 |

| PRODUCT CODE | PAGE |
|-----------------|-------|
| SLST5000AP | 14 |
| SLST5000GPS | 15 |
| SM5000D | 47 |
| SM5000HDD | 47 |
| SM5000HDL | 47 |
| SM5000L | 47 |
| SM7500D | 47 |
| SM7500HDD | 47 |
| SM7500HDL | 47 |
| SM7500L | 47 |
| SM1000D | 47 |
| SM1000HDD | 47 |
| SM1000HDL | 47 |
| SM1000L | 47 |
| SM2000L | 48 |
| SM2500L | 48 |
| SM3000L | 48 |
| SMDF5000 | 47 |
| SMDF7500 | 47 |
| SMDF10000 | 47 |
| SPK | 59 |
| SPT5 | 31/36 |
| SPT9 | 31/36 |
| SPT12 | 31/36 |
| SPTA | 31/36 |
| SPTAL | 31/36 |
| SSBV1 | 25 |
| SSBV2 | 25 |
| SSBV3 | 22/25 |
| SSTS6 | 24 |
| SSTS10 | 24 |
| ST3100 | 19 |
| ST4550 | 19 |
| STB250 | 32 |
| STB450 | 32 |
| STBOXBASIC | 56 |
| STBOXMETER12V | 56 |
| STBOXPRO | 56 |
| STCH20 | 24 |
| STCH20L | 24 |
| STLIDHGR | 19 |
| STMETER12V | 56 |
| STMETER240V | 56 |
| STRUT430MM-200N | 59 |
| SWP250 | 32/36 |
| SWP250-40 | 32/36 |
| SWP250FC | 32/36 |
| SWP450 | 32/36 |
| SWP450-40 | 32/36 |
| SWP450-50 | 32/36 |
| SWP450FC | 32/36 |
| SWT15 | 30/36 |
| SWT4500 | 30/36 |
| SWTC | 30/36 |

T

| | |
|---------|----|
| TB2 | 24 |
| TBC20 | 49 |
| TBC20FH | 49 |

| PRODUCT CODE | PAGE |
|--------------|------|
| TDD1 | 44 |
| TDD2 | 44 |
| TDD3 | 44 |
| TFFK | 65 |
| TIF3 | 25 |
| TIF4 | 25 |
| TR0 | 44 |
| TR1 | 44 |
| TR2 | 44 |
| TS600 | 24 |
| TS1000 | 24 |
| TSPK | 36 |
| TWT60 | 49 |
| TWT60S | 49 |
| TWTS | 49 |
| TWTWTAP | 49 |

U

| | |
|--------------|----------|
| UMFO | 18/24 |
| URRM | 18/19/24 |
| URT3300B | 18 |
| URT3300VF | 18 |
| URT3300VF/GP | 18 |
| URT3300VF/PC | 18 |
| URT5000B | 18 |
| URT5000VF | 18 |
| URT5000VF/GP | 18 |
| URT5000VF/PC | 18 |
| URTL | 18/24 |
| URVF01 | 25 |
| URVF15 | 25 |
| URVF30 | 25 |
| URVFR | 25 |
| URVFWM | 25 |

W

| | |
|-------|-------|
| WCK01 | 23 |
| WCK02 | 23/24 |
| WFV1 | 25 |
| WFV2 | 25 |
| WFV3 | 25 |



Together we hold the future.

P: 1800 062 064

W: polymaster.com.au

Swan Hill | Melbourne | Adelaide | Sydney | Brisbane