

Polymaster

Product Guide 2023



Why Choose Polymaster?

Polymaster uses top grade materials that are trialled and tested at every point during the design and manufacturing process. Our products are backed up with global quality and process certifications, manufactured in our purpose built facilities we can control the entire process from the powder we use to the end product.



Manufactured Locally

Australian owned & operated since 1994



Custom Tank Builder

Industry leading technology to put you in control of your tank building journey



Product Certification

Built to the Rainwater tank Standard AS/NZS 4766:2006 for peace of mind. Licence no. BMP657671 & BMP650824



Fittings Standard

Rainwater Tanks come standard with fittings. Ask us what fittings come with the tank model you are interested in



Quality Assurance

Polymaster only produces quality products and service, certifying us for the International Standard ISO9001 for quality management



One Piece Tank Construction

With no joins or seams, our new generation roof design eliminates the need for an internal support pole



BPA Free

For your peace of mind



Extra Thick Walls

Each Polymaster tank undergoes ultrasonic thickness testing and impact testing to ensure material is correct thickness



Food Grade

Our tanks are made from food-grade polyethylene and certified to AS/NZS4020, the Australian Standard for drinking water



Messaging Service

Know where your tank is and when to expect its delivery



UV+ Double Strength

Our exclusive UV+ double strength resin gives the best protection against Australia's harsh sun



Delivery

Large fleet, fast turn around times & free to many sites. See Delivery & Installation for full details - page 64.



Reliability

Our drivers take pride in getting our tanks exactly where you want them, when you need them



Store Locator

Looking for your nearest store? With our store locator you can find the nearest store to you.

RAINWATER TANKS

Round Rainwater Tanks	6
Slimlines Tanks & Pumps	9
Underground Water Tanks	11
Pipeline Tanks	12
Tank Accessories	13
Water Pumps	15

SEPTIC TANKS

17

DIESEL TANKS

Diesel Self Bunded Tanks	19
Diesel Single Skin Tanks	21
Diesel Ute Packs	22
Diesel Transfer Tanks	23
Diesel Trailer Packages	24
Dispensing Kits	25
Pumps & Accessories	26

ADBLUE® TANKS

AdBlue® Self Bunded Tanks	29
Adblue® Single Skin Storage Tanks	31
Adblue® Ute Packs & Accessories	32

FIRE FIGHTING


Water Cartage Tanks	34
Compact Packages	35
Skid Mounted Packages	36
Trailer Packages	37
Pumps & Accessories	38

AGRICULTURE & FARMING

Liquid Fertiliser Tanks	40
Fertiliser Mixing Tanks	42
Aquaculture	43
Troughs	44
Equine	50
Calving & Cattle	52
Footrot Baths	55
Lambing	56
Calf & Lamb Accessories	57
Farm Storage Equipment	58
Safety & Spill Containment	62

Tank Colours

With so many choices of Colorbond® matched hues, we've made it easy to perfectly blend your new tank with your new home or surroundings. This range takes the guesswork out of matching your tank colour with your exterior walls, guttering or roofing. No wonder this range is an Australian favourite.

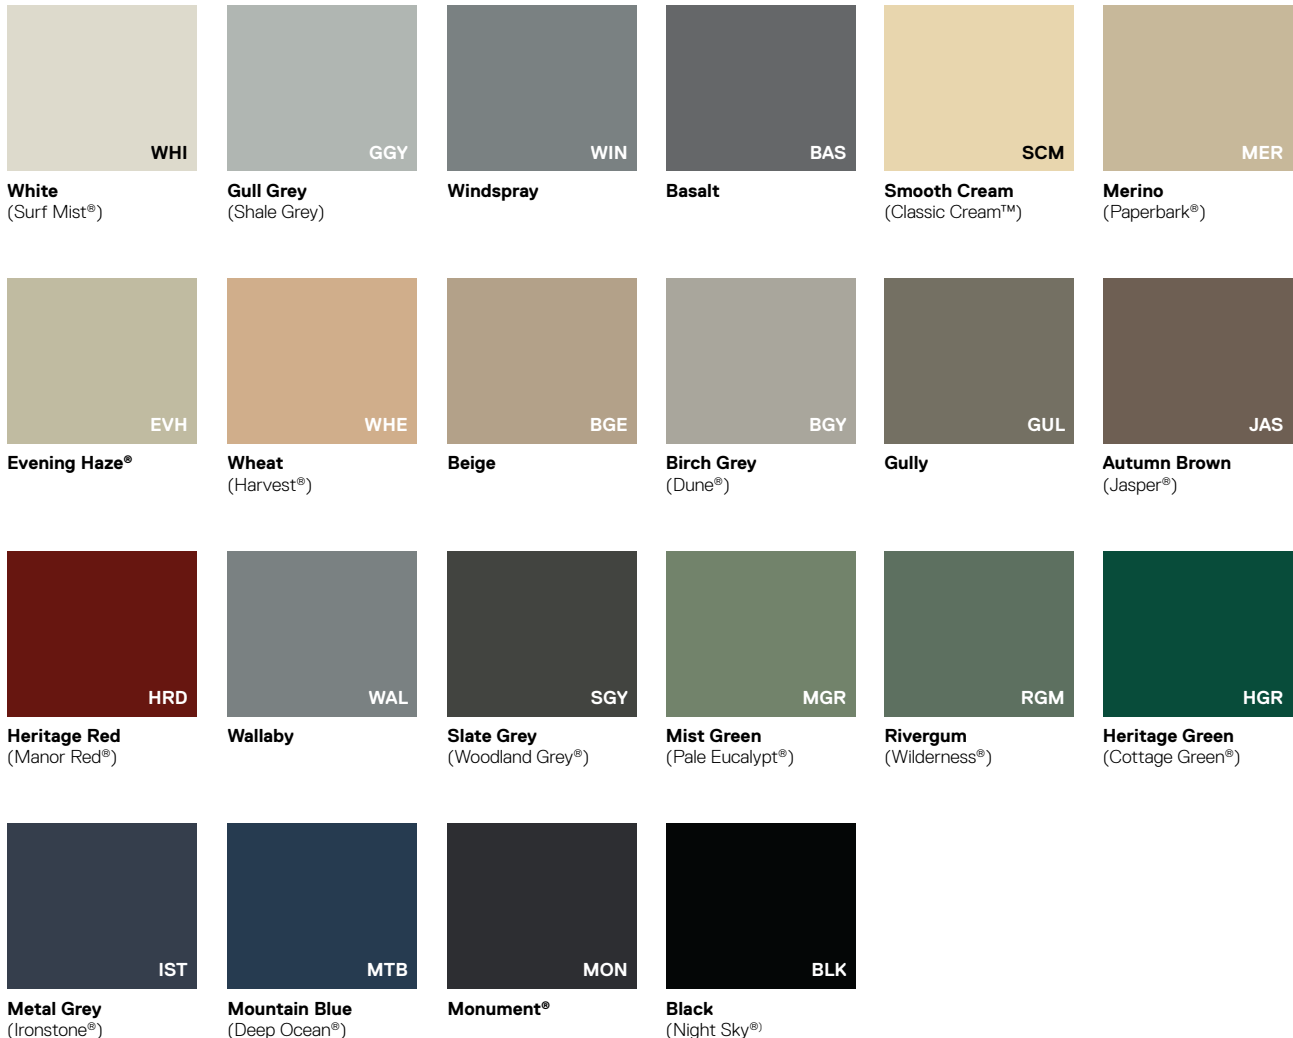

Contact us to discuss your colour project on 1800 062 064.

Please note actual colours may vary on a real product compared to a printed brochure. Check out colour swatches at your local distributor for accurate colour representation.

Colours are shown for illustrative purposes only and may vary. Polymaster will not be held liable for incorrect colour impressions. Request your Polymaster colour sample to view colours. *COLORBOND® and colour names are registered trademarks of Blue Scope Steel Ltd.™ Polymaster tank colours represented match COLORBOND® steel colours. As we process our own resin we are able to offer a vast range of custom colours, available at an additional cost.

RAINWATER TANKS



Rainwater Tanks




Premium Round Water Tanks

CODE	PROFILE	CAPACITY (Litres)	DIAMETER	OVERALL HEIGHT	INLET HEIGHT	STRAINER SIZE	OVERFLOW (Alternative)	OUTLET SIZE	UPGRADE BALL VALVE & OUTLET
RWT200	Corrugated	200	600	900	900	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT600	Corrugated	600	1000	950	950	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT1000	Corrugated	1,000	1000	1500	1500	200 (S2)	12	25	40 - BV1.5A 50 - BV2A
RWT1600	Corrugated	1,600	1250	1610	1500	300 (S3)	11/4	25	40 - BV1.5A 50 - BV2A
RWT2270T*	Corrugated	2,270	1300	2000	1920	300 (S3)	11/5	25	40 - BV1.5A 50 - BV2A
RWT2270LP*	Corrugated	2,270	1700	1310	1200	400 (S4)	11/4	25	40 - BV1.5A 50 - BV2A
RWT3300	Corrugated	3,300	1520	2100	2000	300 (S3)	11/4	25	40 - BV1.5A 50 - BV2A
RWT4500T*	Corrugated	4,500	1700	2200	2100	400 (S4)	11/4	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT4500LP*	Corrugated	4,500	2150	1580	1380	400 (S4)	11/3/7	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT5000	Corrugated	5,000	1950	2170	1960	400 (S4)	11/3/7	25	40 - BV1.5A 50 - BV2A 80 - BV3A
RWT7100	Corrugated	7,100	2150	2300	2120	400 (S4)	11/3/7	40	50 - BV2A 80 - BV3A
RWT9000	Corrugated	9,000	2500	2260	2050	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A
RWT13600	Corrugated	13,600	3100	2450	2100	400 (S4)	11/2/5/8	40	50 - BV2A 80 - BV3A 100 - BV4A
RWT22500	Corrugated	22,500	3560	2800	2470	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A 100 - BV4A
RWT31700	Corrugated	31,700	4100	3040	2610	400 (S4)	11.30/2.30/ 5.30/8.30	40	50 - BV2A 80 - BV3A 100 - BV4A
RWT50KL	Smooth	50,000	4600	3440	3290	500 (S5)	2/4/6/8/10/12	40	50 - BV2A 80 - BV3A 100 - BV4A


*T = Tall
*LP = Low Profile



DIMENSIONS

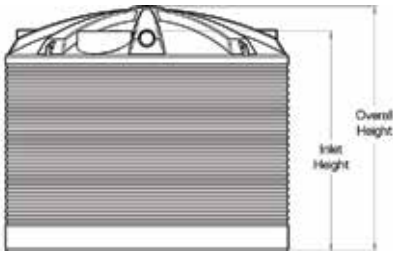

Fit Out Clock



Refer to table for what overflow positions are available for each tank size.

KEY FEATURES

- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Solid brass threaded outlet & ball valve as standard
- Upgraded outlet and ball valves are available at an additional cost
- Outlet standard position 6 o'clock
- *Outlet position can be moved from standard based on positions on the Fit Out Clock
- Replacement manhole covers and strainers available
- Available in 22 Colours
- 90mm overflow as standard



Strainer



Overflow



Brass Outlet



Ball Valve



DOWNLOAD
INSTALLATION GUIDE


Rainwater Tanks



Round Water Tanks

CODE	PROFILE	CAPACITY (Litres)	DIAMETER	OVERALL HEIGHT	INLET HEIGHT	STRAINER SIZE	OVERFLOW (Alternative)	OUTLET SIZE	UPGRADE OUTLET
PCR2000	Smooth	2,000	1175	2255	2185	300 (S3)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR4000	Smooth	4,000	1600	2200	2150	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR5000	Smooth	5,000	1800	2200	2120	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR7000	Smooth	7,000	2200	2200	2020	400 (S4)	10.30, 1.30, 4.30, 7.30	25	40 - BV1.5A 50 - BV2A
PCR10000	Smooth	10,000	2480	2350	2170	400 (S4)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A 100 - BC4A
PCR13500	Smooth	13,500	2830	2630	2470	400 (S4)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A 100 - BV4A
PCR22500	Smooth	22,500	3573	2879	2559	500 (S5)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A 100 - BV4A
PCR27000	Smooth	27,000	3573	3339	3019	500 (S5)	10.30, 1.30, 4.30, 7.30	40	50 - BV2A 80 - BV3A 100 - BV4A

DIMENSIONS



Fit Out Clock




KEY FEATURES

- Outlet standard position is 6 o'clock
- Outlet position can be moved from standard based on positions on the Fit Out Clock
- Self supporting roof means no support poles are necessary
- One piece construction means no joins or seams
- Solid brass threaded outlet and ball valve as standard
- Upgraded outlet and ball valves are available at an additional cost
- Replacement manhole covers and strainers available
- Available in 22 Colours

Refer to table for what overflow positions are available for each tank size.



Strainer



Overflow



Brass outlet



Ball Valve

Slimline Tanks



Builders Tank & Pump Packages

CODE	PUMP CAPABILITY	CAPACITY (Litres)	PUMP CODE	LENGTH	WIDTH	HEIGHT	INLET HEIGHT	OUTLET (Position)	OUTLET SIZE
BSLT2020H4	Single Storey Dwellings	2,020	MHR20-370	2105	735	2010	2010	6&12	25
BSLT2020H5	Double Storey Dwellings	2,020	MHR20-550	2105	735	2010	2010	6&12	25

PUMP INFORMATION

Automatic hydraulic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

*Refer to Page 15 for Pump Details.


CODE DESCRIPTION

BSLT2020PC	Pump Cover for BLST2020
MHC8	Inspection Cover 400mm
S4	Inlet Strainer 400mm

KEY FEATURES

- 10 minute quick install - pump built in, just hook it up
- Moulded handgrips for easy lifting
- 2 x 90mm overflows + 1 cap
- 2 x outlets + 1 cap
- Flexhose 20mm x 600mm female thread
- Hoses for connection at approximately 400mm high
- Available in 22 colours
- Fits through a standard doorway

DIMENSIONS

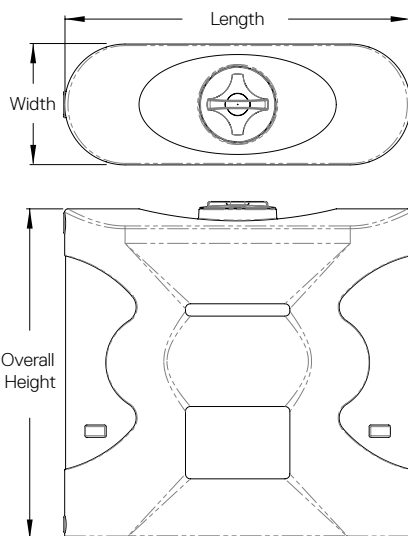


Standard Fittings



Pump pre-installed with rain/mains changeover



Flexible hoses for quick connection



Leaf & mosquito proof mesh screen



2 x Large 90mm overflows (1 each end) + 1 cap



2 x 25mm outlets (1 each end) + 1 plug



Cover to conceal pump

Slimline Tanks & Pump Options





Tank Range

TANK ONLY	TANK + HOUSEHOLD PUMP (HHR-370S-PC)	TANK + GARDEN PUMP (DHJ600)	CAPACITY	DIMENSIONS (L X W X H)
PCST600	-	-	600	1220 x 580 x 1265
PCST1050	PCST1050AP	PCST1050GPS	1050	1460 x 690 x 1515
PCST2000	PCST2000AP	PCST2000GPS	2000	2370 x 600 x 2010
PCST3000	PCST3000AP	PCST3000GPS	3000	2570 x 790 x 2050
PCST5000	PCST5000AP	PCST5000GPS	5000	3290 x 1020 x 2010

*GPS models include separate pump cover (PC01)

CAPACITY (Litres)	STRAINER (mm)	OVERFLOW POSITION	OUTLET POSITION	OUTLET SIZE	MANHOLE COVER
600	300 (S3)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC9
1050	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
2000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
3000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8
5000	400 (S4)	12 STD / 6 ALT	6 STD / 12 ALT	25	MHC8

DIMENSIONS

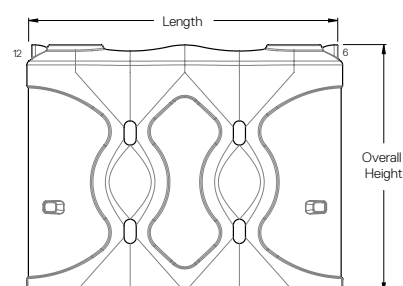

PUMP INFORMATION

Automatic Rain/Mains water changeover device designed for pressure pump supply systems in harvesting rainwater for the toilet, laundry and household applications with automatic mains backup.

*Refer to page 15 for Pump Details.

KEY FEATURES

- Space saving modern design
- 25mm solid brass outlet
- Moulded handgrips for easy lifting
- 90mm overflow
- Available in 22 Colours



Underground Tanks



CODE	DESCRIPTION	CAPACITY (Litres)	LENGTH	WIDTH	HEIGHT
URT3300B	Tank Only	3,300	2470	1640	1665
URT5000B	Tank Only	5,000	3520	1640	1665
URT3300VF	Tank with Vortex Filter	3,300	2470	1640	1665
URT5000VF	Tank with Vortex Filter	5,000	3520	1640	1665
URT3300VF/PC	Tank with Vortex Filter & submersible pump + auto changeover device	3,300	2470	1640	1665
URT5000VF/PC	Tank with Vortex Filter & submersible pump + auto changeover device	5,000	3520	1640	1665
URT3300VF/GP	Tank with Vortex Filter & garden pump + press control	3,300	2470	1640	1665
URT5000VF/GP	Tank with Vortex Filter & garden pump + press control	5,000	3520	1640	1665

Pump Details

TYPE	VOLTAGE	POWER (kW)	HEAD	FLOW	WARRANTY
Submersible Pump (PC)	220-240v	0.75kW (750 watts)	36m	115LPM	2 years
Garden Pump (GP)	220-240v	0.37kW (370 watts)	36m	82LPM	2 years


Accessories

CODE	DESCRIPTION
URRM	500mm Riser - for deeper installations
URTL	Lid to suit Underground Tanks

KEY FEATURES


- Child-proof lid secured with tamper proof screws
- Self-anchoring
- Low profile design - minimal excavation required
- Uni Seals supplied
- Tank to tank connection point

DIMENSIONS

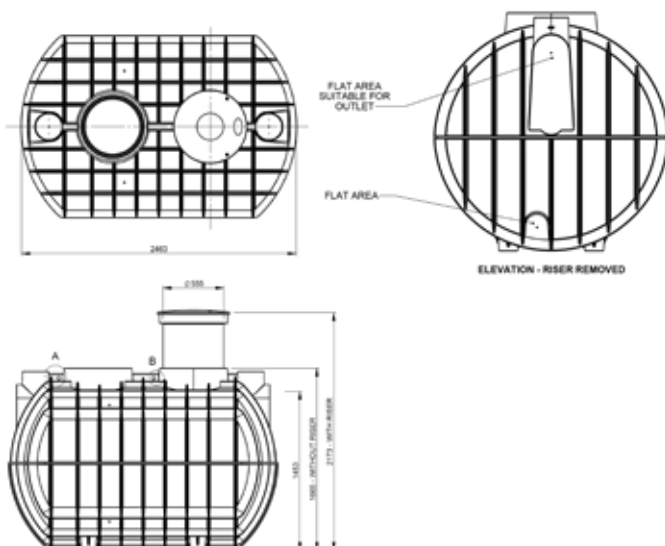

VORTEX FINE FILTER

Self cleaning filter removes sediment and debris, providing you with clean water for storage. Wall mounting bracket available.

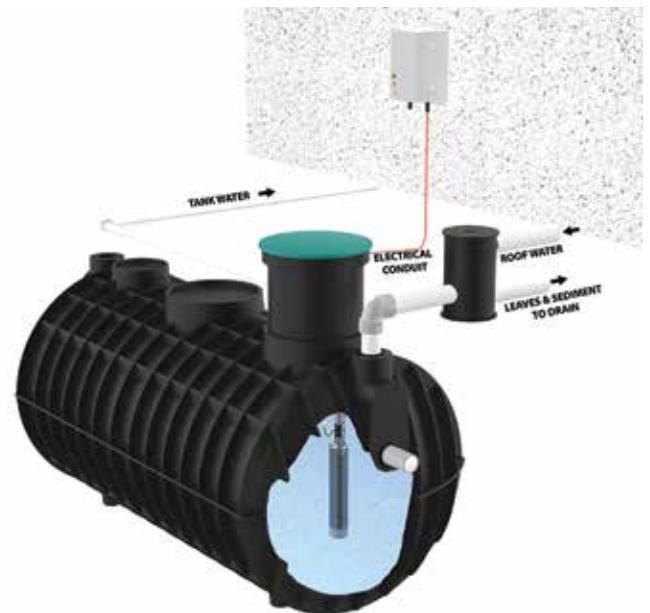

Example Setup Underground Tank with Vortex Filter and Submersible Pump options

Pipeline Tanks



CODE	CAPACITY (Litres)	DIAMETER	INLET HEIGHT	OVERALL HEIGHT	INLET / OUTLET SIZE
PLT9000	9,000	2500	2050	2260	32+50
PLT13600	13,600	3100	2100	2450	32+50
PLT22500	22,500	3560	2470	2800	32+50
PLT31700	31,700	4100	2610	3040	32+50
PLT50KL	50,000	4600	3290	3440	32+50

KEY FEATURES


- Inspection cover
- 90mm overflow/breather & screen
- **AFV2LB** 32mm brass fitting and 25mm poly float
- 50mm outlet and ball valve

STANDARD FITTINGS AND LOCATIONS


12:00	Inspection Cover
2:30	Breather /Overflow
6:00	50mm Brass Outlet & Ball Valve
11:30	Fitting & Float Valve

*Pipeline fittings available page 14

DIMENSIONS

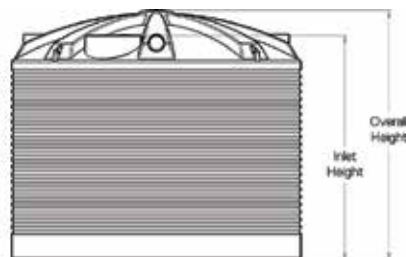

Fit Out Clock



PLT31700

*Pipework not included



Optional internal pipework fit out available

Accessories

Inspection Covers

CODE	DESCRIPTION
MHC1	Inspection Cover for 13,600ltr to 31,700ltr RWT Tanks
MHC3	Water Entry Cover for Tanks with 400mm Sieve
MHC4	Inspection Cover for Tanks with 400mm Sieve
MHC5	Inspection Cover for RWT3300 , RWT2270T and RWT1600 Tanks
MHC6	Inspection Cover for RWT1000 , RWT600 and RWT200 Tanks
MHC8	Inspection Cover for Slimline Tanks 1,050ltr, 2,000ltr, 3,000ltr and 5,000ltr
MHC9	Inspection Cover for 600ltr Slimline Tank
MHCA	Inspection for 13,500ltr to 27,000ltr PCR Tanks + RWT50KL



MHC1



CLG



DPK1

Water Level Indicators

CODE	DESCRIPTION
CLG	Clock Level Gauge
DPK1	Dipstick
DPK1EXT	Dipstick Extension For 50KI Tank
LT01	Levelator - Water Level Indicator
LQ01	Liquidator - Level Indicator Suitable For Corrosive Liquids

Other Rainwater Accessories

CODE	DESCRIPTION
LGSO	Leaf Guard - Swivel Outlet
LWD	Downpipe Water Diverter
OFF9	90mm Overflow Flanged
OFF	Plug To Fit 90mm Overflow
OS9	90mm Overflow Screen
OFF10	100mm Overflow Flanged
PC01	Pump Cover 700L x 450W x 560H mm



LTO 1

Underground Tank Accessories

CODE	DESCRIPTION
JOS90	90mm Ozzie Seal For Overflow
URRM	500mm Riser - For Deeper Installations
URTL	Lid To Suit Underground Tanks
R10112	Uniseal 100mm



PC01

Vortex Self-Cleaning Fine Filters

CODE	DESCRIPTION
URVF01	Vortex Filter Suitable For Roof Areas Up To 200Sq Metres
URVF15	Vortex Filter Suitable For Roof Areas Up To 500Sq Metres
URVF30	Vortex Filter Suitable For Roof Areas Up To 3000Sq Metres
URVFR	Riser Only - For Vortex Self Cleaning Filter
URVFWM	Vortex Filter Wall Mount



URVF01

Tank Inlet Filter

CODE	DESCRIPTION
TIF3	Tank Inlet Filter 300mm including Sieve
TIF4	Tank Inlet Filter 400mm including Sieve



TIF4

Accessories

Sieves / Inlet Strainers

CODE	DESCRIPTION
S2	Sieve 200mm
S3	Sieve 300mm
S4	Sieve 400mm
S5	Sieve 500mm



Rural Fire Tank Fittings

CODE	DESCRIPTION
CFA1	65mm CFA Coupling Only (VIC)
CFA2	65mm CFA Coupling complete with 50mm (2") Outlet & Ball Valve
CFAC	Cap to suit CFA1
CFS1	65mm CFS Coupling Only (SA)
CFS2	65mm CFS Coupling (SA) Complete with 50mm (2") Outlet & Ball Valve
RFS	Rural Fire Service Fitting (NSW)
RFS2	RFS Coupling Complete (VIC Metro, NSW Rural)



Fittings for Pipeline Tanks

CODE	DESCRIPTION
AFV2L-A	25mm (1") plastic Sleeve Valve - Long Arm
AFV2LB	25mm (1") including 1.25" M & F Brass Outlet Plastic Sleeve Valve - Long Arm
IRS32	Internal raised Suction 32mm - suit 40mm outlet
IRS40	Internal raised Suction 40mm - suit 50mm outlet
PLTIP25	Pipeline Tank Internal Pipework 25mm
PLTIP40	Pipeline Tank Internal Pipework 40mm
PT2132	32mm (1 1/4") Dual Level reservoir valve
PT2140	40mm (1 1/2") Dual Level reservoir valve
PT2150	50mm (2") Dual Level reservoir valve
WFV1	25mm (1") Watermark approved Float Valve
WFV2	32mm (1 1/4") Watermark approved Float Valve
WFV3	40mm (1 1/2") Watermark approved Float Valve



Stainless Steel Outlets

CODE	DESCRIPTION
LHO1SS	25mm (1") M+F SS
LHO1.25SS	32mm (1.25") M+F SS
LHO1.5SS	40mm (1.5") M+F SS
LHO2SS	50mm (2") M+F SS
LHO3SS	80mm (3") M SS

Stainless Steel Ball Valves

CODE	DESCRIPTION
SSBV1	25mm (1") SS
SSBV1.25	32mm (1.25") SS
SSBV1.5	40mm (1.5") SS
SSBV2	50mm (2") SS
SSBV3	80mm (3") SS
SSBV4	100mm (4") SS

Brass Outlets

CODE	DESCRIPTION
LHO1	25mm (1") M+F
LHO1.25	32mm (1.25") M+F
LHO1.5	40mm (1.5") M+F
LHO2	50mm (2") M+F
LHO2.5	(2.5") 62mm M+F
LHO3	(3") 80mm M
LHO4	(4") 100mm M

Brass Ball Valves

CODE	DESCRIPTION
BV1	25mm (1")
BV1.5	40mm (1.5")
BV2	50mm (2")
BV3	80mm (3")
BV4	100mm (4")



Water Pumps

Household Pumps with Brass Rain/Mains Changeover Device

CODE	DESCRIPTION	WATTAGE	MAX FLOW (LPM)	POWER (kW)	INLET	OUTLET	WARRANTY
MHR20-370	Single Story Pump	370W	55	0.37	25mm BSPF	20mm BSPF	3 years
MHR20-550	Double Story Pump	550W	70	0.55	25mm BSPF	20mm BSPF	3 years

Submersible Pumps

CODE	DESCRIPTION	WATTAGE	MAX FLOW (LPM)	POWER (kW)	CABLE LENGTH	OUTLET	WARRANTY
HHR-370PC	Pump & Press Control	370W	115	0.75	5m	20mm BSPM	2 years
HHR-370S-PC	Pump & Water Switch	370W	82	0.5	5m	32mm BSPF	2 years

Garden Pumps with Press Control

CODE	DESCRIPTION	WATTAGE	MAX FLOW (LPM)	POWER (kW)	INLET	OUTLET	WARRANTY
DHJ600	Pump & Press Control	600W	45	0.6	25mm BSPF	25mm BSPM	2 years
DHJ800	Pump & Press Control	800W	55	0.8	25mm BSPF	25mm BSPM	2 years
HSJ1000	Pump & Press Control	1000W	85	1	25mm BSPF	25mm BSPM	3 years

Pump Packages - Pump + Pump Cover

CODE	DESCRIPTION	WATTAGE	MAX FLOW (LPM)	POWER (kW)	INLET	OUTLET	WARRANTY
PHGPS	Garden Pump with Press Control & Pump Cover	600W	45	0.6	25mm BSPF	25mm BSPM	2 years
PH400	Household Pump With Brass Change-over Device & Pump Cover	370W	55	0.37	25mm BSPF	20mm BSPF	3 years
PH550	Household Pump With Brass Change-over Device & Pump Cover	550W	70	0.55	25mm BSPF	20mm BSPF	3 years

*Dimensions are approximate



SEPTIC TANKS



Septic Tanks





CODE	CAPACITY (Litres)	WEIGHT (KG)	LENGTH	WIDTH	HEIGHT	INLET SIZE	OUTLET SIZE	NO. OF PERSONS
ST3100	3,100	200	2470	1640	1700	100	100	1-5 people
ST4550	4,550	325	3520	1640	1700	100	100	6-10 people


Accessories

CODE	DESCRIPTION	KEY FEATURES
STLIDHGR	Lid to suit Septic Tank	<ul style="list-style-type: none"> Self anchoring - does not require concrete Fittings and baffle pre-installed Certified for NSW, VIC, SA, QLD 10 minute hook up Low profile design - minimal excavation required One piece construction 100mm inlet and outlet pre-installed Heavy duty lid tested to 500kg loading 500mm riser extension available
URRM	500mm Riser - for deeper installations	

DIMENSIONS

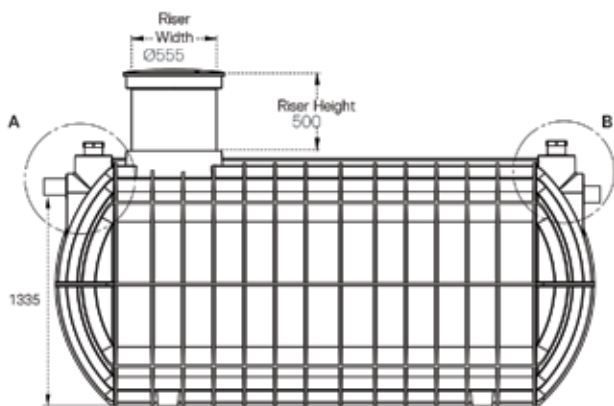

DETAIL A (INLET)



DETAIL B (OUTLET)



ST3100



ST4550



Fittings & Baffle Pre-Assembled



Heavy Duty Lid



Optional Riser Available



SCAN TO LEARN MORE


A worker in an orange high-visibility shirt and a dark cap is refueling a vehicle at a diesel pump station. The worker is holding a black fuel nozzle connected to a hose. The pump station is a large, light-colored metal cabinet with a digital display and various controls. The background is a light-colored corrugated metal wall with a large vented box mounted on it. The ground is gravel.

DIESEL TANKS



Self Bunded Tanks

Three models available: Essential, Ranger or Quantum

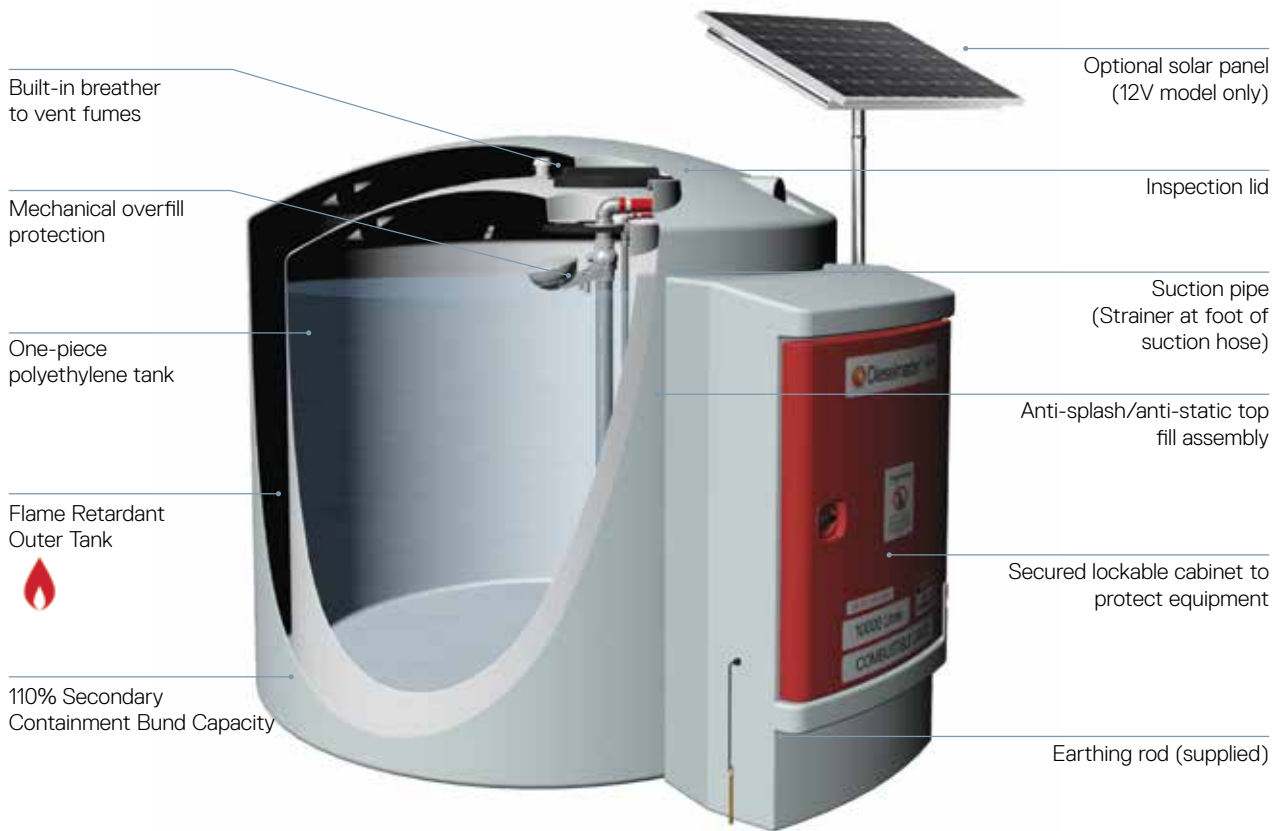

Cabinet Details (Essential Model Shown)




Bunded Tanks Comparison Chart

FEATURES	* ESSENTIAL	RANGER	QUANTUM
Power supply - 240V	✓	✓	✓
Power supply - 12V	–	✓	–
70LPM Piusi pump	✓	✓	✓
6mtr dispensing hose with auto-shut off trigger nozzle	✓	✓	–
10mtr hose reel with auto-shutoff trigger nozzle	–	–	✓
Auto-shutoff nozzle holster	–	✓	✓
30 micron clear water capture filter - to 150LPM	✓	✓	✓
2" camlock connection to fill - top fill assembly	✓	✓	✓
Anti-splash/anti-static top fill assembly	✓	✓	✓
Mechanical overfill protection	✓	✓	✓
High/Low level electronic audible alarm	–	✓	✓
Bund alarm	✓	✓	✓
110% secondary containment bund capacity	✓	✓	✓
Flame retardant outer tank material	✓	✓	✓
Digital level indicator	✓	✓	✓
Secured lockable cabinet to protect equipment	✓	✓	✓
Mechanical fluid meter to measure vehicle usage	✓	–	–
Digital fluid meter to measure vehicle usage	–	✓	✓
Power control box with auto time out (10mins) & emergency stop	–	✓	✓
Fuel management system for up to 120 users	–	–	✓

Specifications

CODE	CAPACITY (Litres)	A	B	C	D
DMDS5000	5,000	2200	2080	2260	2750
DMDS7000	7,000	2500	2190	2350	3070
DMDS10000	10,000	2500	2520	2710	3062
*DMDS10000E	Only available in 10,000ltrs				

DIMENSIONS

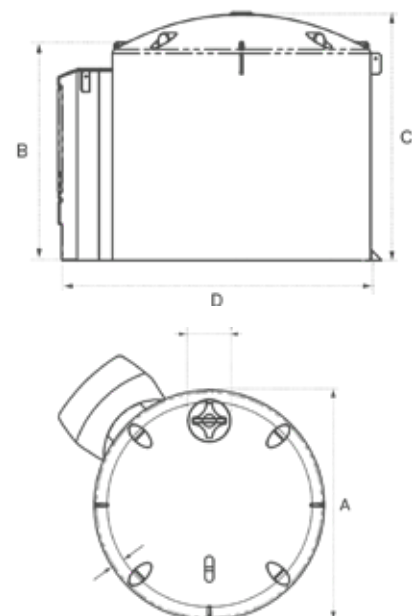

Single Skin Tanks




CAPACITY (Litres)	TANK ONLY	TANK + DISPENSER 240V	TANK + DISPENSER 240V
4,500	DSW4500	DSW4500+DK-240V	DSW4500+DK-12V
6,500	DSW6500	DSW6500+DK-240V	DSW6500+DK-12V
9,500	DSW9500	DSW9500+DK-240V	DSW9500+DK-12V

KEY FEATURES

- High Quality Diesel Grade Material
- UV Resistant for Australian Conditions
- Plug & Play Installation, Easy to Relocate
- Clock Type Level Gauge
- Galvanised Pipework
- 2" Aluminium Camlock
- 2" Brass Outlet with Lockable Ball Valve
- Earthing Rod
- Breather Vent
- Mechanical Overfill Protection
- Australian Made Tank

KEY FEATURES (TANK & DISPENSER)

- Complies to Australian Standards AS1940:2017 with Approved Bund
- Quality Italian Pumps Available in 240V & 12V
- Lockable Pump
- 70LPM Pump (56LPM on 12V Unit)
- Water Captor Filter
- 6m Diesel Hose (4m on 12V unit)
- Auto Shutoff Nozzle
- Mechanical Fluid Meter

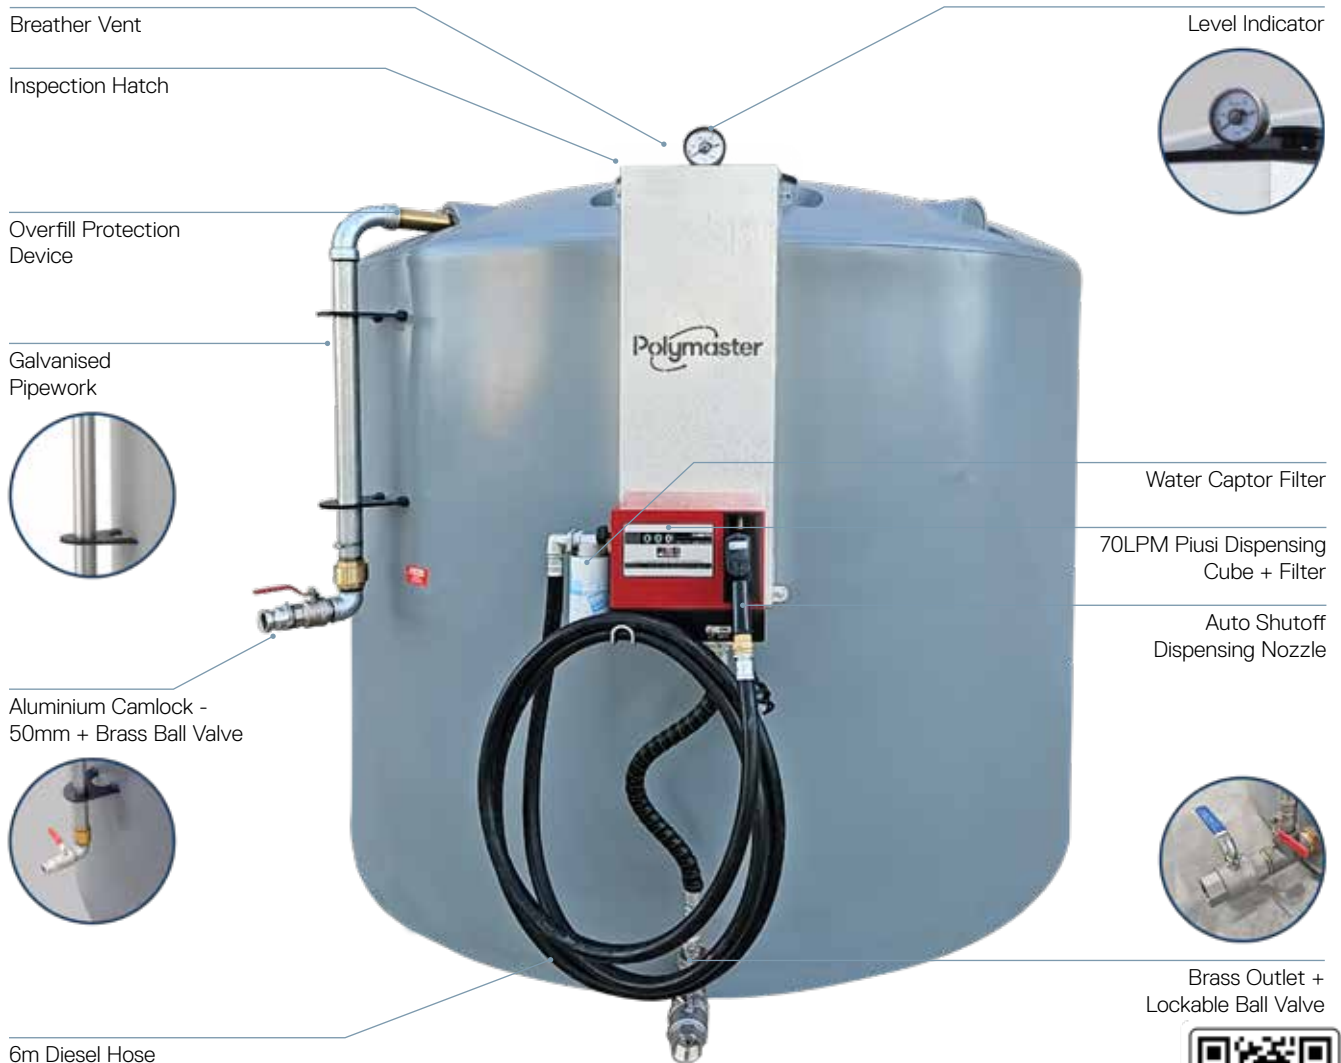

Ute Packs



CODE	CAPACITY (ltrs)	DIMENSIONS (L x W x H)	PUMP*	PUMP FLOW (LPM)	HOSE LENGTH (m)	AUTO TRIGGER NOZZLE	MOUNTING FRAMES
DMP100E	100	770 x 540 x 500	DP50PUMP	50	4	Yes	DM100MF
DMP200E	200	1000 x 750 x 605	DP50PUMP	50	4	Yes	DM200MF
DMP400E	400	1620 x 750 x 665	DP50PUMP	50	4	Yes	DM400MF
DMPQ400E	400	930 x 1200 x 685	DP50PUMP	50	4	Yes	-
DMPQB400E (Bunded)	400	1130 x 1380 x 832	DP50PUMP	50	4	Yes	-
DMP600E	600	1720 x 890 x 755	DP50PUMP	50	4	Yes	DM600MF
DMP800E	800	1720 x 890 x 925	DP50PUMP	50	4	Yes	DM800MF

*Refer to Diesel Pump page for full pump details on page 26

KEY FEATURES

- High quality Piusi Italian pump
- Lockable lid
- UV protected
- Earth strap
- 4m Diesel hose
- In-line mesh filter
- Pump isolation switch
- Auto shutoff nozzle and swivel
- 4m pump cable + alligator clips
- Vented fill cap

OPTIONAL EXTRAS

- Gas Struts - Only available on cube ute packs
- Fuel Gauge
- Digital fluid meter
- Bund available - cube ute packs
- Mounting frames available



Pump



Nozzle



Vented Filler Cap + Inline Filter



Alligator Clips



Lockable Lid



Base Wear Pads

Transfer Tanks



CAPACITY (ltrs)	TANK ONLY	TANK + 12V PUMP	TANK + FASTFLOW 12V PUMP	TANK + DUAL 24/12V PUMP	TANK + 240V PUMP	DIMENSIONS (L x W x H)
1200	DM1200-S	DMP1200-S	DMPF1200-S	DMPD1200-S	DMP1200-S-240V	1500 x 1190 x 920
2000	DM2000-S	DMP2000-S	DMPF2000-S	DMPD2000-S	DMP2000-S-240V	2280 x 1280 x 990
3000	DM3000-S	DMP3000-S	DMPF3000-S	DMPD3000-S	DMP3000-S-240V	2280 x 1540 x 1220

Pump Options

PUMP CODE	PUMP TYPE	VOLTAGE	POWER (kW)	FLOW (LPM)
DP50PUMP12-ASY	12V	12	0.3	50
DP85PUMP	FASTFLOW 12V	12	0.5	85
DP1224PUMP	DUAL 24/12V	24/12	0.42/0.15	70/35
DP72PUMP	240V	240	240	75

KEY FEATURES

- High quality Piusi Italian pump
 - Pin mounting feet to secure to trailer or flat bed
 - 4m Diesel hose
 - Site tube with ball valve
 - Auto shutoff nozzle and swivel
 - 4m pump cable + alligator clips
 - Vented fill cap
 - Earth Strap
 - Pump isolation switch
 - UV protected
- *Refer to Diesel Pump page for full pump details on page 26



Breather



Site Tube



Pump



Nozzle



Alligator Clips



Pin Mounts

Trailer Packages



CODE	CAPACITY (ltrs)	TANK DIMENSIONS (L x W x H)	TRAILER DIMENSIONS (L x W x H)	PUMP*	PUMP FLOW LPM	HOSE LENGTH (m)	AUTO TRIGGER NOZZLE
DMPFT1200-S	1200	1450 x 1200 x 1000	3940 x 1770 x 1500	DP85PUMP	85	6	Yes
DMPFT2000-S	2000	1900 x 1450 x 1200	4460 x 1970 x 1650	DP85PUMP	85	6	Yes

KEY FEATURES - TRAILER

- Hot dip galvanised dual axle trailer
- 5 Stud Wheel Pattern
- Electric brakes - 2000ltr
- Hydraulic brakes - 1200ltr
- Road pack including brakes and LED lights
- Emergency breakaway protection
- Compliance plate - road registrable

KEY FEATURES - TANK AND PUMP


- 85LPM 12V Diesel pump with by-pass valve and integrated on/off switch
- Auto shutoff nozzle with 6m hose
- 4m pump cable + alligator clips
- Breather vent
- Trailer mounted toolbox to protect the hose, pump and nozzle
- 10m retractable hose reel (optional extra)
- *Refer to Diesel Pump page for full pump details



Mechanical fluid meter

Diesel pump - with by-pass valve & integrated on/off switch voltage - 12v
flow rate - 85 l/min
duty cycle - 30mins

Auto shutoff nozzle with 6m hose as standard

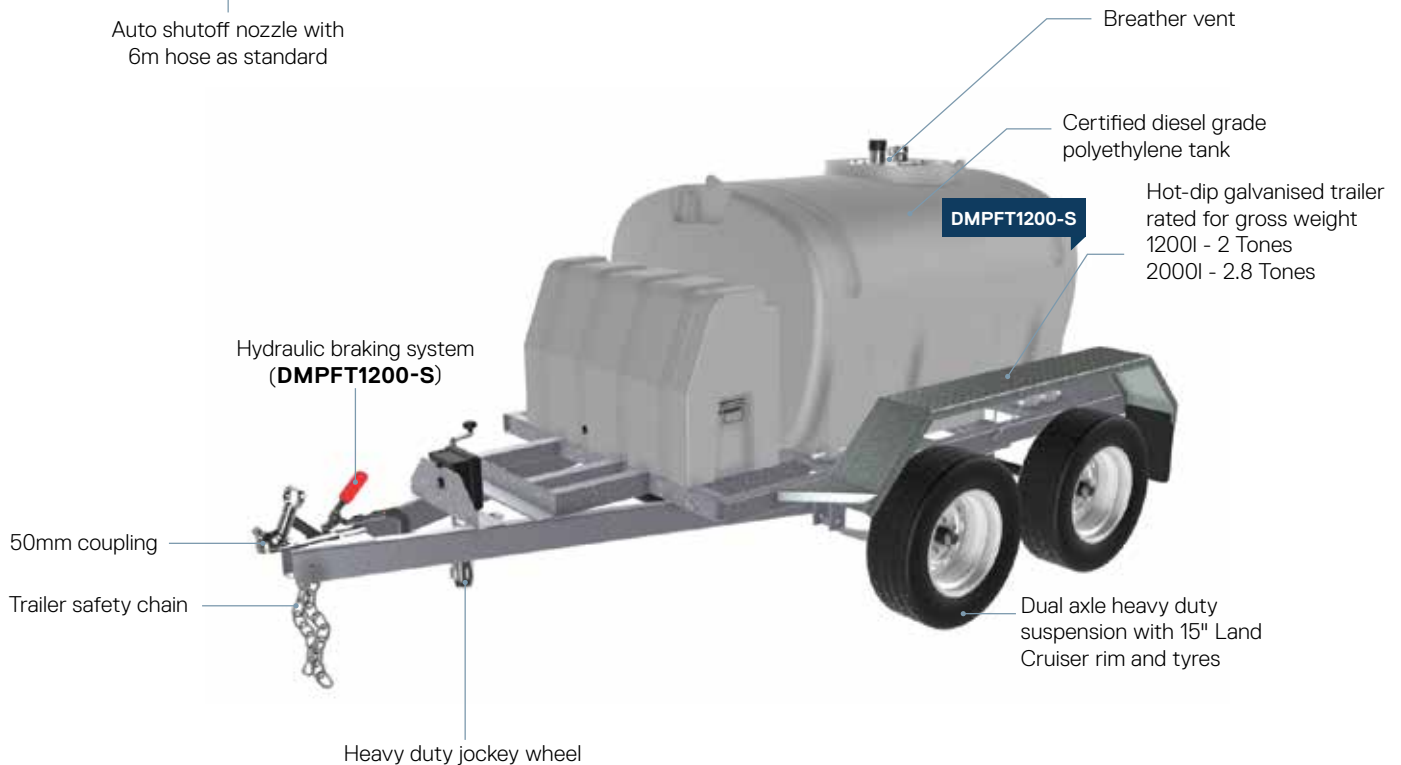

Dispensing Kits

CODE	FLOW RATE (LPM)	VOLTAGE	HOSE LENGTH (m)	HOSE DIAMETER	OUTLET (BSP)
STMETER12V	56	12v	4	20	25
STMETER240V	70	240v	4	20	25
DP72KA	70	240v	6	20	25
STBOXMETER12V	80	12v	4	25	25
STBOXBASIC	70	240v	6	25	25
STBOXPRO	70	240v	6	25	25
CUBE56-12V	56	12v	4	25	25
CUBE70-240V	70	240v	6	25	25

KEY FEATURES

- Mechanical 4 Digit Meters
- Auto shutoff nozzles
- 12V and 240V Options available
- High quality Piusi Italian pumps
- Lockable (STBOX & CUBE Models)
- Steel backing board (pre-assembled)



Pumps & Accessories

Diesel Pumps

CODE	DESCRIPTION	VOLTAGE	POWER (kW)	FLOW (LPM)	INLET	OUTLET	WARRANTY (yrs)	KIT
DP50PUMP12V-ASY	50Lpm Diesel Pump	12v	0.3	50	25mm	25mm	1	DP50K
DP72PUMP	72Lpm Diesel Pump	240v	0.5	72	25mm	25mm	1	DP72K
DP85PUMP	85Lpm Diesel Pump Fast Flow	12v	0.5	85	25mm	25mm	1	DP85K
DP1224PUMP	70/35Lpm Diesel Pump Dual Voltage	12v/24v	0.42/0.15	70/35	25mm	25mm	1	DP1224K

Pump Kits

CODE	CONTENTS
DP50K	Pump, 4m Hose & Auto Shutoff Nozzle
DP85K	Pump, 4m Hose, Auto Shutoff Nozzle
DP1224K	Pump, 4m Hose, Auto Shutoff Nozzle



Meters & Gauges

CODE	CONTENTS
CLG-D	Diesel Clock Level Gauge
DMDT	Digital Turbine Meter
DMDT-UTE	Diesel Digital Turbine Meter Kit - Suits all Ute Packs
DMM4	4 Digit Mechanical Meter
DPM	Diesel Pulse Meter
DFG100	Diesel Fuel Gauge - Suits DMP100E
DFG200	Diesel Fuel Gauge - Suits DMP200E
DFG400	Diesel Fuel Gauge - Suits DMP400E
DFG600	Diesel Fuel Gauge - Suits DMP600E + DMPQ400E
DFG800	Diesel Fuel Gauge - Suits DMP800E



Accessories

Filters

CODE	CONTENTS
DCF25	Water Captor Filter Cartridge Full Head Assembly - 150LPM (Metal Case)
DCF25F	Water Captor Filter Cartridge (1) -150 LPM (Metal)
DCF25CL	Clear Captor Filter Full Assembly - 2 x Cartridges 100LPM
DCF25CLF	Clear Captor Filter Cartridge Only (1) - 100LPM



DCF25

Cube Ute Pack Accessories

CODE	CONTENTS
BM35TNB-RES	35L AdBlue Reservoir Tank for Cube
DM400QBUND	Diesel 400Ltr Cube Outer Bund
STRUT430MM-200N	Gas Strut 430MM L 200N- Suits Cube Range



CLG-D

Accessories

CODE	DESCRIPTION
ATN65	65LPM Diesel Auto Nozzle
ATN90	90LPM Diesel Auto Nozzle
BMCB-D	Diesel MC Box
BSFMS	Plusi MC Box B.Smart
D-CONNECT2KIT	Diesel Connection Hose to Kits
DH2020-4M	4m Diesel hose - 20 x 20 Male connectors
DH2020-6M	6m Diesel hose - 20 x 20 Male connectors
DH2025-4M	4m Diesel hose - 20 x 25 Male connectors
DH2025-6M	6m Diesel hose - 20 x 25 Male connectors
DHR10M25	10m Diesel Retractable Hose Reel
DMFC	Diesel Filling Cap - Metal
DMLI	Diesel Level Indicator (OCIO)
FCV	Diesel Vented Filling Cap - Plastic - Suits DMP Range
MCBKEYS	MC Box User Keys (Pk 10)
MCBKEYS-RED	MC Box User Keys - Red Manager
MCBPCIF	MC Box PC Software & USB Convert
MCBSW	MC Box Software
SPK	Solar Panel Kit



BMCB-D



DHR10M25



ATN90

ADBLUE® TANKS



Bunded Tanks

Three models available: DEPOT, TERMINAL, SUBMERSIBLE PUMP RANGE



Cabinet Details

Depot Range



Terminal Range Standard Features



8m Hose Reel



MC Box
(User management system)



Digital Tank Level Indicator
(All models)




Submersible Pump
(Options Available)

Bunded Tanks Comparison Chart

FEATURES	DEPOT	TERMINAL	SUBMERSIBLE
Australian made	✓	✓	✓
110% Bund capacity	✓	✓	✓
Bund alarm	✓	✓	✓
Digital tank volume measurement	✓	✓	✓
50mm (2") Stainless Steel Drybreak (fill)	✓	✓	✓
Mechanical Overfill protection	✓	✓	✓
High/Low level audible alarms	✓	✓	✓
Power control panel with emergency stop	✓	✓	✓
Earth rod	✓	✓	✓
Auto timeout - 10mins	✓	✓	✓
Lockable cabinet	✓	✓	✓
Digital delivery meter	✓	✓	-
120 User Piusi fuel management system	-	✓	-
5mtr delivery hose	✓	-	-
8mtr retractable delivery hose reel	Optional	✓	-
Auto shut off nozzle and holster	✓	✓	-
25mm Discharge line terminated in the cabinet	-	-	✓
Warranty	5yr on Tank	5yr on Tank	5yr on Tank
240V - 35LP Piusi AdBlue® Pump	Standard	Standard	-
12V - 35LPM Piusi AdBlue® Pump	Optional	-	-
240V - Calpeda Submersible AdBlue® Pump	-	-	Standard
240V - Franklin Submersible AdBlue® Pump	-	-	Optional
Globe valve to regulate flow rate	-	-	✓
ATG Probe Tube	Optional	Optional	Optional
Tank lifting Lugs	Optional	Optional	Optional

Specifications

AdBlue® Self Bunded Tanks

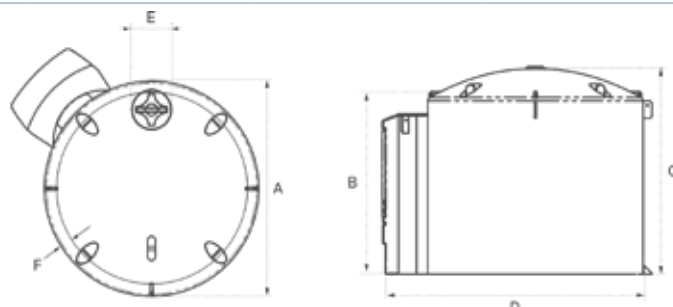

CODE	CAPACITY (LTRS)	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)
BMDS2300	2300	1600	2160	2200	2120	490	150
BMDS3300	3300	1800	2130	2200	2300	490	130
BMDS5000	5000	2200	2080	2260	2750	490	120
BMDS7000	7000	2500	2190	2350	3070	500	170
BMDS10000	10,000	2500	2520	2710	3062	500	40

Single Skin Storage Tanks



Round Tanks

CODE	CAPACITY (Litres)	DIMENSIONS (MM)
BMS2000RPB	2,000	1175 Dia x 2355H
BMS4000RPB	4,000	1600 Dia x 2300H
BMS5000RPB	5,000	1800 Dia x 2300H
BMS7000RPB	7,000	2200 Dia x 2300H
BMS10000RPB	10,000	2480 Dia x 2450H



KEY FEATURES

- External Liquid Level Indicator
- SS Pipework
- 2" SS Dry Break
- 2" Outlet and Ball Valve
- Earthing Rod
- Breather Vents
- Screw Lid - Inspection Hatch

Slimline Tanks

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)
BMSL2000RPB	2,000	2590 x 750 x 2110
BMSL3000RPB	3,000	2870 x 940 x 2150
BMSL5000RPB	5,000	3590 x 1170 x 2110



Adblue® Level Gauge



SS Pipework & 2" SS Dry Break



2" Outlet and Ball Valve

Single Skin Slimline Tank + Cabinet

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	PUMP	PUMP FLOW (LPM)	HOSE LENGTH (m)
BMSL5000LGY-C	Slimline AdBlue® Tank + Cabinet	5,000	4140 x 1170 x 2110	B240VP-P	35	5

KEY FEATURES

- Optimised Fleet Solutions for AdBlue® storage and dispensing to SCR/DEF equipped vehicles.
- Slimline Submersible Pump Available in Calpeda or Franklin options
- Simplifies dispensing operation
- Plug 'n' play set up for fast installation



Ute Packs & Accessories



Portable Ute Packs

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	PUMP	PUMP FLOW (LPM)	HOSE LENGTH (m)	MOUNTING FRAMES
BM100-B	Tank + 12 Volt Pump	100	770 x 540 x 500	B12V-COMET	17	4	DM100MF
BM200B-P12	Tank + 12 Volt Pump	200	1000 x 750 x 605	B12VP-P	35	4	DM200MF
BM400B-P12	Tank + 12 Volt Pump	400	1620 x 750 x 665	B12VP-P	35	4	DM400MF



Accessories

CODE	DESCRIPTION
B12KP-P	IBC Kit - 12V
BATN-P	AdBlue® Auto Shutoff Nozzle (Piusi)
BDM-P	AdBlue® Pluse Meter
BDRHP-P	AdBlue® Rotary Hand Pump
BMCB-A	AdBlue® McBox
BMHR8-P	AdBlue® Hose Reel Retractable 20mm x 8m
BMLI	Level Indicator (Ocio) AdBlue®
BMTN-P	Nozzle Manual AdBlue® - Plastic Piusi





FIRE-FIGHTING / WATER CARTAGE



SCAN TO
LEARN MORE

Water Cartage Tanks



Ute Packs

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)	OUTLET
FTR200	200	1050 x 750 x 600	25mm
FTR400	400	1680 x 750 x 600	25mm
FTR600U	600	1720 x 890 x 755	25mm
FTR800U	800	1720 x 890 x 925	25mm



Water Cartage Tanks

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)	OUTLET
FTR600-S	600	1200 x 1120 x 710	40mm
FTR800-S	800	1500 x 1190 x 710	40mm
FTR1200-S	1200	1500 x 1190 x 975	40mm
FTR2000-S	2000	2280 x 1280 x 1040	40mm
FTR3000-S	3000	2280 x 1540 x 1270	40mm



KEY FEATURES

UTE PACK

- Moulded internal baffles for vehicle stability
- Brass outlet
- Tough and durable one-piece moulding
- 140mm 1/4 turn hinged lid
- High strength, lightweight polyethylene construction
- Provision for strap
- Wear pads to allow airflow underneath and protect ute tray

WATER CARTAGE

- Brass outlet
- Forklift galvanised skids available
- Tough and durable one-piece moulding
- 400mm 1/4 turn hinged lid
- Sits directly on any flat surface
- High strength, lightweight polyethylene construction
- Provision for strap or pin mounting



Brass Threaded Outlet



Quarter Turn Hinged Lid (Water Cartage)



140mm Vented Lid (Ute Pack)

Compact Packages



CODE	CAPACITY (Litre)	POWER (HP)	DIMENSIONS (TANK) (L x W x H)	PUMP CODE	ENGINE/PUMP	STARTER
FTRC200-25	200	2.5	1050 X 750 X 600	MB25L	Loncin/Onga	Pull Petrol
FTRC200-55	200	5.5	1050 X 750 X 600	B55H	Honda/Onga	Pull Petrol
FTRC400-25	400	2.5	1680 X 750 X 600	MB25L	Loncin/Onga	Pull Petrol
FTRC400-55	400	5.5	1680 X 750 X 600	B55H	Honda/Onga	Pull Petrol
FTRC400-55-HR*	400	5.5	1680 X 750 X 600	B55H	Honda/Onga	Pull Petrol
FTRC600-55	600	5.5	1720 X 890 X 755	B55H	Honda/Onga	Pull Petrol
FTRC600-55-HR*	600	5.5	1720 X 890 X 755	B55H	Honda/Onga	Pull Petrol
FTRC800-55	800	5.5	1720 X 890 X 925	B55H	Honda/Onga	Pull Petrol
FTRC800-55-HR*	800	5.5	1720 x 890 x 925	B55H	Honda/Onga	Pull Petrol

*HR - Includes 36m Hose Reel

KEY FEATURES

- Tough and durable one-piece moulding
- Sits directly on any flat surface
- High strength, lightweight polyethylene construction
- 12m hose with fire fighting nozzle
- Wear pads to allow airflow underneath and protect ute tray
- 36m Hose Reel & Fire-Fighting Nozzle with all -HR models
- Provision for strap

*Refer to Water Cartage & Fire Fighting Pumps page 38 for full pump details



Pump



Hose Reel



Nozzle

Skid Mounted Packages



CODE	CAPACITY (Litres)	STARTER	DIMENSIONS (L x W x H)	PUMP CODE
FTRS600-S	600	Pull-Petrol	1800 x 1400 x 850	B65HT
FTRS600ES-S	600	Electric- Starter	1800 x 1400 x 850	B65HTES
FTRS800-S	800	Pull-Petrol	1900 x 1400 x 850	B65HT
FTRS800ES-S	800	Electric- Starter	1900 x 1400 x 850	B65HTES
FTRS1200-S	1,200	Pull-Petrol	1900 x 1400 x 1100	B65HT
FTRS1200ES-S	1,200	Electric- Starter	1900 x 1400 x 1100	B65HTES
FTRS2000-S	2,000	Pull-Petrol	2100 x 1800 x 1200	B65HT
FTRS2000ES-S	2,000	Electric- Starter	2100 x 1800 x 1200	B65HTES

KEY FEATURES

- 6.5HP Honda twin-impeller pump
 - 36m hose reel and fire fighting nozzle included
 - Heavy duty galvanised skid frame
 - Fork on - fork off capability
 - Bottom fill manifold with 6m suction hose
 - Optional dust suppression nozzle kit available (**DSN20K**)
- *Refer to Pump page 38 for full pump details

Skids Only

CODE	COMPATIBILITY	DIMENSIONS L x W x H
FFS600	600Ltr FTR Tanks	1595 x 1120 x 115
FFS800-1200	800 - 1200Ltr FTR Tanks	1745 x 1350 x 115
FFS2000	2000Ltr FTR Tanks	1940 x 1690 x 115



Trailer Packages



CODE	CAPACITY (Litres)	PUMP*	STARTER	ENGINE/PUMP	TANK DIMENSIONS (L x W x H)	TRAILER DIMENSIONS (L x W x H)
FTRT1200-S	1200	B65HT	Pull - Petrol	Honda/Onga	1500 x 1190 x 975	3940 x 1770 x 1500
FTRT1200TES-S	1200	B65HTES	Electric - Petrol	Honda/Onga	1500 x 1190 x 975	3940 x 1770 x 1500
FTRT1200TESD-S	1200	FFDPTES	Electric - Diesel	Yanmar/Onga	1500 x 1190 x 975	3940 x 1770 x 1500
FTRT2000-S	2000	B65HT	Pull - Petrol	Honda/Onga	2280 x 1280 x 1040	4460 x 1970 x 1650
FTRT2000ES-S	2000	B65HTES	Electric - Petrol	Honda/Onga	2280 x 1280 x 1040	4460 x 1970 x 1650
FTRT2000ESD-S	2000	FFDPTES	Electric - Diesel	Yanmar/Onga	2280 x 1280 x 1040	4460 x 1970 x 1650

KEY FEATURES - TRAILER

- Hot dip galvanised dual axle trailer
- 14" wheels - 5 stud pattern
- Electric brakes - 2000ltr
- Hydraulic brakes - 1200ltr
- Road pack including brakes and LED lights
- Emergency breakaway protection
- Compliance plate - road registrable

KEY FEATURES - TANK AND PUMP

- 6.5HP Honda powered twin impeller pump
- 400mm 1/4 turn hinged lid
- Trailer mounted toolbox to protect the hose
- Suction return manifold with 6m suction hose
- 36m Hose reel & fire fighting nozzle
- Optional dust suppression nozzle kit available (**DSN20K**)
- *Refer to Water Cartage & Fire Fighting Pumps page for full pump details



Pumps & Accessories

CODE	DESCRIPTION	ENGINE/ PUMP	STARTER	POWER (HP)	HEAD (m)	FLOW (LPM)	INLET	OUTLET	# OF OUTLETS	WARRANTY (yrs)
MB25L	Mini Blaze 2.5HP	Loncin/ Onga	Pull - Petrol	2.5	21	133	25mm BSPM	25mm BSPM	1	1
B55H	Honda 5.5HP Single Impeller	Honda/ Onga	Pull - Petrol	5.5	60	585	32mm BSPM	25mm, 25mm, 40mm BSPM	3	2
B65HT	Honda 6.5HP Twin Impeller	Honda/ Onga	Pull - Petrol	6.5	100	373	50mm BSPM	25mm, 25mm, 40mm BSPM	3	2
B65HTES	Honda 6.5HP Twin Impeller Electric Start	Honda/ Onga	Electric - Petrol	6.5	100	373	50mm BSPM	25mm, 25mm, 40mm BSPM	3	2
FFDPTES	Yanmar 7HP Diesel Electric Start	Yanmar/ Onga	Electric - Diesel	7	100	450	50mm BSPM	25mm, 25mm, 40mm BSPM	3	2



MB25L



B55H



FFDPTES


Fire Fighting Accessories

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
BFK	Bottom Fill Kit - Suits FTFC 5.5HP Compact Fire Units	
FFHR1	Hose Reel Only 20mm x 36mtr	555 DIA x 165W
TFFK	Tank Fire Fighting Kit with 36mtr Hose reel on galvanised stand	900 x 600 x 700
FHR	Manual Hose Reel 20mm x 36mtr	427 x 391 x 380
DSN20K	Dust Suppression Nozzle	
FHRC36	Fire Hose Reel Cover - suits 36m hose	600 x 205 x 580
FHRC50	Fire Hose Reel Cover - suits 50m hose	575 x 270 x 600




FFHR1

* Does not include hose

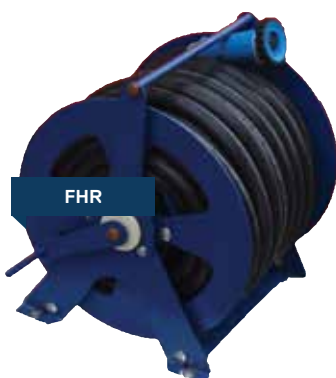

FHR

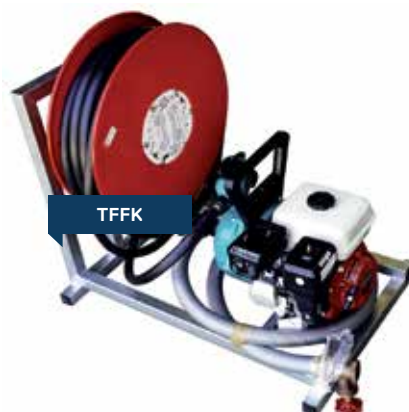

TFFK



FHRC50

* Includes hose



AGRICULTURE & FARMING



SCAN TO
LEARN MORE

Liquid Fertiliser Storage



Self-Draining Tanks

CODE	CAPACITY (Litres)	DIAMETER (mm)	OVERALL HEIGHT
LFTSDT23000	23,000	3450	3054
LFTSDT28000	28,000	3450	3601
LFTSDT33000	33,000	3450	4149

KEY FEATURES
<ul style="list-style-type: none"> Completely self-draining tank base (100% drainage) To suit liquids up to to 1.5SG Top fill kit – 2" (50mm) SS camlock with ball valve – making tanker filling easy Sight tube level indicator
<ul style="list-style-type: none"> 2" (50mm) SS outlet with ball valve + camlock 90mm overflow/breather (mesh screen) 600mm vented screw lid for easy access

Vented Screw Lid



Clear Sight Tube + Ball Valve

Secure Base



Top Fill Assembly

No liquid will flow out when the ball valve is closed



2" Camlock + Ball Valve

2" Outlet, Ball Valve + Camlock




2" Camlock + Ball Valve

2" Outlet, Ball Valve + Camlock


Gradual Slope

Sump

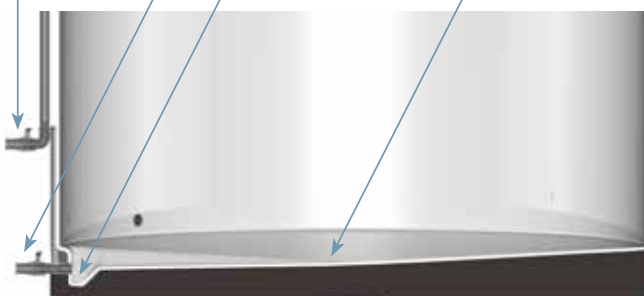

Self-Draining Tank Base

COLOUR RANGE

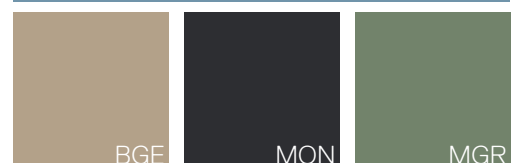

BGE

MON

MGR

Liquid Fertiliser Storage



Flat Bottom Tanks

CODE	CAPACITY (Litres)	DIAMETER	OVERALL HEIGHT	OUTLET SIZE	TOP FILL KIT
LFT9000	9,000	2500	2260	50	LFTK
LFT13600	13,600	3100	2450	50	LFTK
LFT22500	22,500	3560	2800	50	LFTK
LFT31700	31,700	4100	3040	50	LFTK
LFT50KL	50,000	4600	3440	50	LFTK

KEY FEATURES

- Heavy duty construction to suit liquids up to 1.4SG
- Level indicator as standard
- Optional top fill kit
- Inspection cover
- Standard with 50mm Stainless Steel Outlet, Ball Valve and Camlock



LFTK

*Optional extra



LFT22500

*Pole not included

STANDARD FITTINGS AND LOCATIONS

12:00	Inspection Cover
12:30	2" Stainless Steel Outlet (LH02SS)
12:30	2" Stainless Steel Camlock (bottom fill connection)
12:30	2" Stainless Steel Ball Valve
1:30	Liquidator - True Level Indicator (LQ01)
2:30	Breather / Overflow

3" STAINLESS STEEL UPGRADE OPTION


- 3" Outlet (**LH03SS**)
- 3" Camlock (**SC80-F**)
- 3" Ball Valve (**SSBV3**)

Fertiliser Mixing Tanks



Fertigation Tank + Base & Venturi Fitout

CODE	CAPACITY	DIMENSIONS	LID
FT2000B+V	2,000 ltr	2000 DIA x 1000 H	FTL2000
FT5000B+V	5,000 ltr	2850 DIA x 1180 H	
FT9000B+V	9,000 ltr	3500 DIA x 1280 H	
FTL2000	Lid to suit 2,000 ltr Fertigation Tank	2180 DIA	

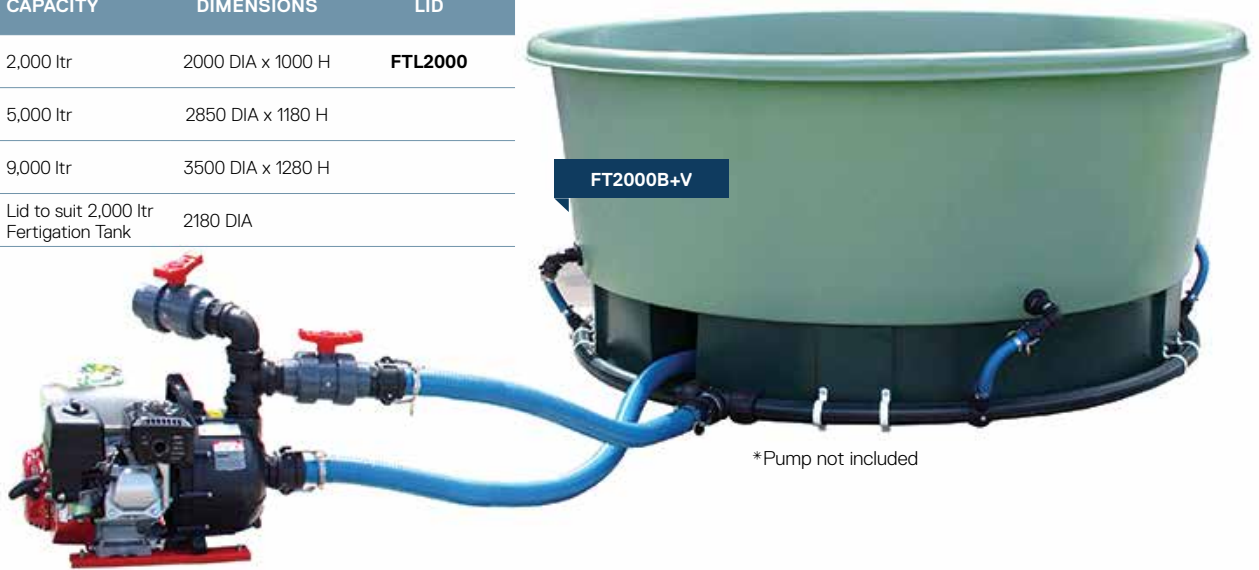


Recommended Pump for Venturi Setup

CODE	DESCRIPTION	ENGINE/ PUMP	POWER (HP)	HEAD	FLOW (LPM)	INLET	OUTLET	WARRANTY
HTP750VR	Chemical Transfer Pump Honda 6,5HP	Honda/Onga	6.5	40m	750	50mm NPT	50mm NPT	2 years

KEY FEATURES

- No internal pipework within tank to get in the way
- Self draining tank with integrated moulded sump connects to PVC 65mm, 100mm for 5000 & 9000 Ltr
- PVC pipe not included
- 10 degree sloping base
- 50mm Camlock with base & venturi set up
- Pumps to suit venturi system available

DIAGRAM

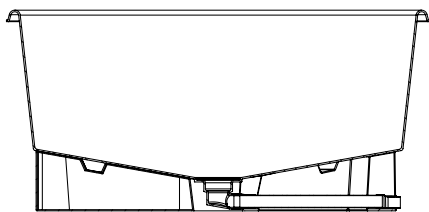

Vortex Plate



Venturi Agitators



Camlock Connection



Petrol or Diesel pumps available




Aquaculture

Aquaculture Tanks

CODE	DESCRIPTION	DIMENSIONS	POLY RISER	FLOOR SLOPE ANGLE	WATER CONTROLLER KIT
FT200	200 ltr Flat Bottom Tank	800 DIA x 560 H			
FT500B	500 ltr Tank + Base	1000 DIA x 1000 H	APRS	80mm	WCK01
FT1000B	1,000 ltr Tank + Base	1040 DIA x 1200 H	APRS	40mm	WCK01
FT2000B	2,000 ltr Tank + Base	2140 DIA x 1000 H	APRS	150mm	WCK01
FT5000B	5,000 ltr Tank + Base	2850 DIA x 1180 H	APRS	120mm	WCK02
FT9000B	9,000 ltr Tank + Base	3500 DIA x 1280 H	APRS	100mm	WCK02
FTL2000	Lid to suit 2000L Tank	2180 DIA			



DIAGRAM

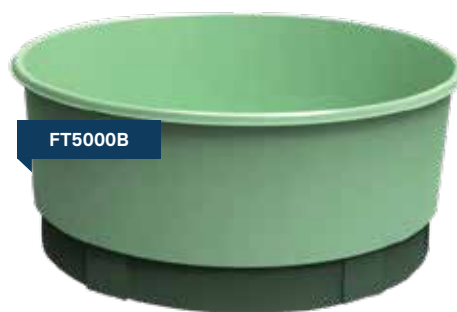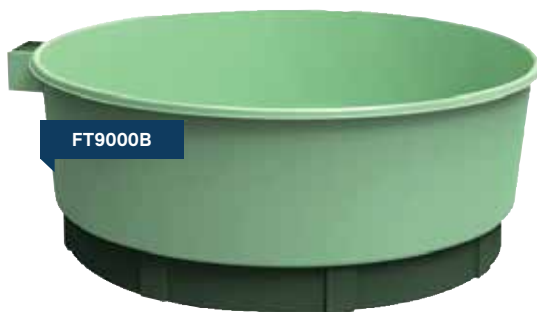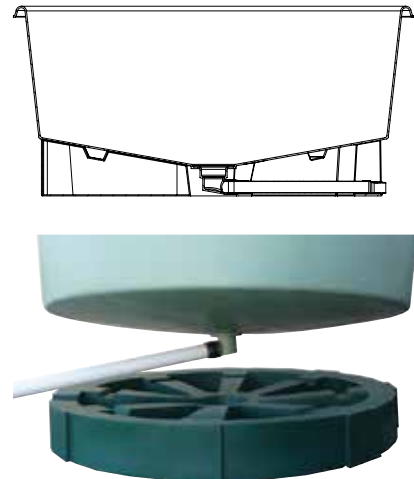

Round Water Troughs



Master Tub Troughs - with float

CODE	CAPACITY (Litres)	DIMENSIONS	FLOAT INLET	PRESSURE	DRAIN	DRAIN CAP	FLOAT COVER
MT2	200	970 DIA x 375H	25mm BSPM	140psi / 965 kPa	75	DC3	MTFC
MT6	600	1400 DIA x 520H	25mm BSPM	140psi / 965 kPa	75	DC3	MTFC
MT12	1,200	1765 DIA x 600H	25mm BSPM	140psi / 965 kPa	75	DC3	MTFC
MT24	2,400	2380 DIA x 650H	25mm BSPM	140psi / 965 kPa	75	DC3	MT05
MT45	4,500	3730 DIA x 650H	25mm BSPM	140psi / 965 kPa	75	DC3	MT04

PolyChoice Troughs - with float

CODE	PROFILE	CAPACITY (Litres)	DIMENSIONS	FLOAT INLET	PRESSURE	DRAIN	DRAIN PLUG
PCTR22	Round	220	1000 DIA x 400H	20 BSPM	150psi / 1034kPa	50	DP2
PCTR66	Round	660	1500 DIA x 500H	20 BSPM	150psi / 1034kPa	50	DP2
PCTR120	Round	1200	1900 DIA x 530H	20 BSPM	150psi / 1034kPa	50	DP2

KEY FEATURES

- Easy to service float valves
- Full float protection
- Drain cap at very base of trough so maximum amount of water will empty when draining
- Easy to service float valve
- Raised float allows trough to fill completely



Float + Float Cover



Drain Cap



Float Cover



Drain Cap

Round Water Troughs

Bare Round Water Troughs - no float

CODE	CAPACITY (Litres)	DIMENSIONS	DRAIN	DRAIN CAP
PT12W	250	1000 DIA x 420H	75	DC3
PT10W	500	1200 DIA x 500H	75	DC3
PT11W	1,000	1650 DIA x 600H	75	DC3
PT13W	2,000	2100 DIA x 600H	75	DC3




Stock Water Tank & Trough

CODE	DESCRIPTION	CAPACITY	DIMENSIONS	FLOAT INLET	DRAIN	DRAIN CAP	FLOAT COVER
SWT4500	Tank & Trough Combination	4500ltr	2500 DIA x 2000H	25mm BSPM	75	DC3	SWTC
SWT15	Trough Only - inc Float Valve & Cover	1500ltr	2500 DIA x 375H	25mm BSPM	75	DC3	SWTC

KEY FEATURES

1. Inspection cover
2. Full float cover to protect valve from stock damage
3. Inlet connection
4. 25mm float valve mounted in bottom of wall to maintain level in trough
5. 75mm drain cap in trough
6. 25mm tank inlet and 25mm float valve supplied

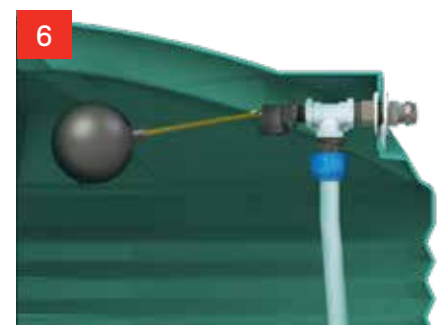

Long Water Troughs



Supa Troughs - with float

CODE	DESCRIPTION	CAPACITY (Litres)	PRESSURE	DIMENSIONS (L x W x H)	FLOAT COVER	DRAIN CAP
SPT5	5 ft	250	140psi / 965 kPa	1500 x 600 x 375	SPTA	DC3
SPT9	9 ft	450	140psi / 965 kPa	2700 x 600 x 375	SPTA	DC3
SPT12	12 ft	600	140psi / 965 kPa	3700 x 600 x 375	SPTAL	DC3

KEY FEATURES

- One-piece trough incorporating float cover
- Long lasting UV resistant polyethylene
- Flexible and durable
- Raised cover allows trough to fill fully
- 25mm Float Valve & Cover + 75mm Bung each end



Float + Float Cover



Drain Cap



Polychoice Troughs - with float


CODE	PROFILE	CAPACITY (Litres)	DIMENSIONS (L x W x H)	FLOAT INLET	PRESSURE	DRAIN	DRAIN PLUG
PCTL12	Long	160	1200 x 600 x 375	25 BSPM	150psi / 1034kPa	50	DP2
PCTL24	Long	360	2400 x 600 x 375	25 BSPM	150psi / 1034kPa	50	DP2

'M' Series Troughs - with float


CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)	FLOAT COVER
PTM31W	140	2400 x 460 x 175	PTMFC
PTM32W	100	1800 x 460 x 175	PTMFC
PTM33W	60	1200 x 460 x 175	PTMFC
PTM34W	35	750 x 460 x 175	PTMFC

KEY FEATURES

- Long lasting UV resistant polyethylene
- Flexible and durable
- Stackable for storage
- 15mm float valve and cover
- In built eyelets for securing to ground



Float Cover



Fully Enclosed Float

Long Water Troughs



Sweep Ballast Troughs

CODE	DESCRIPTION	CAPACITY	DIMENSIONS (L x W x H)	FLOAT COVER	BROOM	DRAIN PLUG
SWP250	Trough with 25mm Float Valve	250 ltr	3492 x 580 x 350	SWP250FC	STB250	DP2
SWP250-40	Trough with 40mm Float Valve	250 ltr	3492 x 580 x 350	SWP250FC	STB250	DP2
SWP450	Trough with 25mm Float Valve	450 ltr	3495 x 772 x 375	SWP450FC	STB450	DP2
SWP450-40	Trough with 40mm Float Valve	450 ltr	3495 x 772 x 375	SWP450FC	STB450	DP2
SWP450-50	Trough with 50mm Float Valve	450 ltr	3495 x 772 x 375	SWP450FC	STB450	DP2

KEY FEATURES


- Easy cleaning - smooth sweep out end
- Flexible and durable
- Hinged float cover prevents any damage to inlet
- Tough double skin unit for extra strength
- 50mm Drain Plug
- Contoured brooms available for easy sweep out cleaning



Float Cover SWP250



Float Cover SWP450

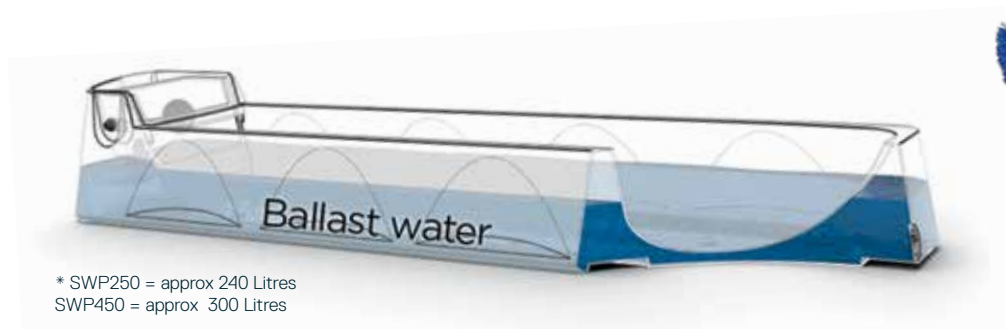

* SWP250 = approx 240 Litres
SWP450 = approx 300 Litres

Feed Troughs

Calf Feeding - Dry Feed Troughs

CODE	CAPACITY (kg)	DIMENSIONS (L x W x H)	POLY INSERT
PTC36F	68kg	2400 x 300 x 600	PTC36I
PTC37F	52kg	1800 x 300 x 600	PTC37I

KEY FEATURES

- Galvanised frames with splayed legs for greater stability.
- Provision for pegging down



'M' Series Troughs

CODE	CAPACITY (Litres)	DIMENSIONS (L x W x H)
PTM31F	140	2400 x 460 x 185
PTM32F	100	1800 x 460 x 185
PTM33F	60	1200 x 460 x 185
PTM34F	35	750 x 460 x 185

KEY FEATURES

- Long lasting UV resistant polyethylene
- Stackable for storage
- Flexible and durable
- In built eyelets for securing to ground



Continuous Dry Feed Trough

CODE	DESCRIPTION	DIMENSIONS (L x W x H)	ANCHORING PEGS (6 pack)
CFT8	No Ends	2320 x 230 x 85	FTP9
CFT8E	Ends Both Sides	2320 x 230 x 85	



Trough Spares

Float Valves

CODE	DESCRIPTION
AFV2	25mm (1") Plastic Sleeve Valve to suit Supa Troughs, Master Tubs and Longline Troughs Pressure range 0 - 965kpa (0 - 140psi)
AFV2SEAL	Float Valve Seal AFV2
AFV3B	32mm (1¼") Plastic Sleeve Valve - High Volume incl 40mm (1½") M & F Brass outlet. Pressure range 0 - 450kpa (0 - 65psi)
AFV4B	40mm (1½") Plastic Sleeve Valve - High Volume incl 50mm (2") M & F Brass Outlet. Pressure range 0 - 450kpa (0 - 65psi)
AFV5B	50mm (2") Plastic Sleeve Valve - High Volume incl 2½" M & F Brass Outlet. Pressure range 0 - 450kpa (0 - 65psi)
AFV6	25mm (1") Plastic piston valve to suit MT2, MT6 (fitted prior to May 2009) Pressure range 0 - 1400kpa (0 - 200psi)
AFV6L	25mm piston valve long arm 1400KPA rating
AFV0L	15mm (1/2") Philmac Float Valve - Long Arm For PT49W, PT50W & M Troughs
JFV20	20mm Jobe Float Valve for PolyChoice Troughs Pressure range 0 - 1034kpa (0 - 150psi)



Drain Caps & Plugs

CODE	DESCRIPTION
DC2	50mm (2") Drain Cap for all longline troughs, PT49W & PT50W
DCSE	Seals only for 50mm (2") Drain Cap
DC3	75mm (3") Drain Cap
DC3SE	Seals only for 75mm (3") Drain Cap
DP2	50mm (2") Drain Plug
DPSE	Seals only for 50mm (2") Drain Plug

Float Covers

CODE	DESCRIPTION
PTMFC	Float cover for PTM31W, PTM32W, PTM33W, PTM34W
MTFC	Float cover for MT2, MT6, MT12
SWTC	Float cover for SWT4500, SWT15
SPTA	Float cover for SPT5, SPT9
SPTAL	Float cover for SPT12
SWP250FC	Float cover for SWP250, SWP250-40, SWP250-50
SWP450FC	Float cover for SWP450, SWP450-40, SWP450-50

Fence & Stable Drinkers - with float

CODE	FENCE BRACKETS	CAPACITY (Litres)	DIMENSIONS (L x W x H)	BRACKETS & MOUNTS	DRAIN CAP
PT48W	-	8	300 x 300 x 224	PT14BR	PT04WC
PT48WB	Yes	8	300 x 300 x 224	PT14BR	PT04WC
PT49W	-	25	440 x 380 x 350	PT49BRS	DC2
PT49WB	Yes	25	440 x 380 x 350	PT49BR	DC2
PT50W	-	45	490 x 430 x 440	PT49BRS	DC2
PT50WB	Yes	45	490 x 430 x 440	PT49BRS	DC2
PT90W	Yes	90	550 x 1090 x 400	PT90BRS	DC2

KEY FEATURES

- Drain cap for easy cleaning
- Fix directly to the wall or brackets available for fence hanging
- Stylish colours available



Fence & Stable Feeders

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	BRACKETS & MOUNTS
PT02	Feeder + fence brackets	45	540 x 410 x 380	PT49BRS
PT02FS	Feeder + wall mount brackets	45	540 x 410 x 380	PT02STBR
PT03	Hayrack (suitable to hang on fence)		600 x 500 x 700	PT03R
PT14	Fence Feeder 'D' Type	32	440 x 400 x 250	PT14BR
PT15	Corner Feeder	32	450 x 450 x 270	PT14BR
PTF18	Tyre Feeder	18	350 DIA x 195H	

COLOUR RANGE



Equine

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
FSB200	Feed Storage Bin 200 ltr-Hinged Lid	520 x 860 x 560
HSP	Mounting Block - Handi Step 120kg SWL	700 x 520 x 670
POB20	20ltr Buckets with level measurements	
PSC	Feed Scoops holds 2.5kg pellets	



Accessories

CODE	DESCRIPTION
PTWK7	Spacesaver 15mm (½") piston valve for PT48W (Pressure range 0 - 850kpa (0 - 120psi))
PT04WC	25mm (1") Drain Cap for PT48W Drinkers
DC2	50mm (2") Drain Cap for PT49W & PT50W Drinkers
DCSE	Seals only for 50mm (2") Drain Cap



COLOUR RANGE BUCKETS & FEED SCOOPS



Calving & Cattle




Molasses Storage Tanks

CODE	PROFILE	CAPACITY (Litres)	DIAMETER	OVERALL HEIGHT	INLET HEIGHT	OUTLET SIZE
MOL13600	Corrugated	13,600	3100	2450	2100	80
MOL22500	Corrugated	22,500	3560	2800	2470	80
MOL31700	Corrugated	31,700	4100	3040	2610	80
MOL50KL	Smooth	50,000	4600	3440	3290	80

KEY FEATURES

- Heavy duty wall thickness
- Ideal for liquids up to 1.4SG
- Standard with 80mm brass outlet and inspection cover
- Fitted with overflow as breather and screen

DIMENSIONS

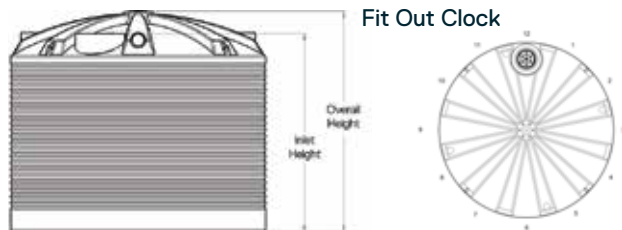


Molasses Feeder

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
PT05	Licker Drum 100 ltr	800 X 700 X 425
PT05C	Case only	
PT05R	Roller only	

KEY FEATURES

- Urea feeding and bloat control
- Removable roller for cleaning
- Floating roller - no metal bearings

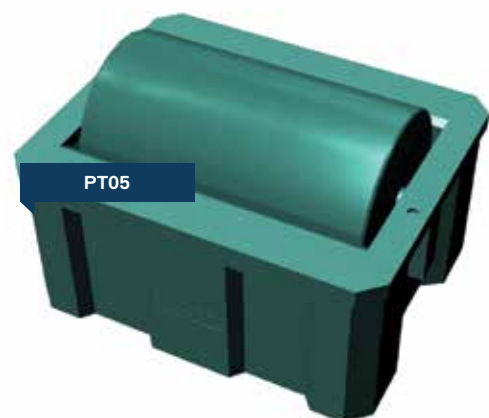

Calving & Cattle

Calf Milk Feeders

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	BRACKETS & MOUNTS	TEAT & CAP	TEAT
MBP	Single Teat Milk Bottle	2	100 x 180 x 250		PCT/SCIT	PCT
MM1P	Single Teat Feeder	5	200 x 200 x 300		PCT/SCIT	PCT
MM5P	5 Teat Feeder - Divisional	30	270 x 760 x 300	MM5BR	PCT/SCIT	PCT
MM8P	8 Teat Feeder - Divisional	40	340 x 1130 x 300	MM12BR	PCT/SCIT	PCT
MM12P	12 Teat Feeder - Divisional	70	540 x 1260 x 320	MM12BR	PCT/SCIT	PCT
MM13P	13 Teat Feeder - Divisional	70	280 x 1800 x 330	MM12BR	PCT/SCIT	PCT

KEY FEATURES

- Generous spacing between teats
- Teat caps easily unscrew to wash out feeder
- Galvanised hanging brackets to suit rail spacing
- UV stabilised poly for long outdoor use



Mobile Gravity Milk Feeders



CODE	DESCRIPTION	CAPACITY	DIMENSIONS (L x W x H)	MANIFOLD
MG40P	40 Teat Feeder - single axle	400 ltr	2200 x 1500 x 1200	MG4M
MG50P	50 Teat Feeder - single axle	400 ltr	2800 x 1500 x 1200	MG5M
MG50TAP	50 Teat Feeder - dual axle	400 ltr	2800 x 1500 x 1200	MG5M
MG50LTAP	50 Teat Feeder - dual axle	800 ltr	2800 x 1500 x 1200	MG5M
MG60P	60 Teat Feeder - dual axle	800 ltr	3100 x 1550 x 1500	MG6M
MG400T	400 ltr (tank only)	400 ltr		
MG800T	800 ltr (tank only)	800 ltr		



Mobile Mixer and Tanker

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
MMT400	400 ltr - 2.5HP Pump	2200 x 1500 x 1200



Riverina Milk Transporter

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
RMT	200 ltr - single axle	1700 x 1200 x 1000



Milk Transfer Pump Kit

CODE	DESCRIPTION	FLOW (LPM)
MTP110	Milk Transfer Submersible pump kit 12V	40



KEY FEATURES

- Fully hot dipped galvanised trailers
- Screw on teats can be replaced with blanks
- Adjustable fold away jockey wheel
- Built in backwash for all trailer units
- Self cleaning washing head used in tank
- Large hinged filling lids

Footrot Baths



CODE	DESCRIPTION	DIMENSIONS (L x W x H)	CAPACITY (Max Litres)
FRB	FRB Standing Type	2530 x 1000 x 200	300
RFRB	RFRB Race Type	2400 x 480 x 200	80

KEY FEATURES - STANDING

- Control hoof diseases in sheep and goats
- Use with portable yard to keep animals confined
- Lightweight for ease of handling
- Non slip dimpled floor
- End to end linking feature
- Will not rot, rust or flake and fully chemical resistant

*Not recommended for cattle and horses

KEY FEATURES - RACE

- Control hoof diseases in sheep and goats
- Unique pyramid shaped rib through centre of trough
- Keep hooves either side of the trough
- Added strength and support to trough floor
- Reduce amount of solution needed to treat stock
- Non slip dimpled floor
- End to end linking feature is ideal for placing in sheep race
- Will not rot, rust or flake and fully chemical resistant

*Not recommended for cattle and horses



Pyramid Rib + Dimpled Floor

Lambing

Lamb Milk Feeders

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	BRACKETS & MOUNTS	TEATS & CAPS	TEATS
FLBF	Clear Single Teat Milk Feeders	1	80 x 80 x 300		LT/BC	LT
MBL	Single Teat Milk Bottle	2	100 x 180 x 250		LT/SC	LT
MM1L	Single Teat Feeder	5	200 x 200 x 300		LT/SC	LT
MM5L	5 Teat Feeder - Divisional	30	270 x 760 x 300	MM5BR	LT/SC	LT
MM8L	8 Teat Feeder - Divisional	40	340 x 1130 x 300	MM12BR	LT/SC	LT
MM12L	12 Teat Feeder - Divisional	70	540 x 1260 x 320	MM12BR	LT/SC	LT
MM13L	13 Teat Feeder - Divisional	70	280 x 1800 x 330	MM12BR	LT/SC	LT

KEY FEATURES

- Generous spacing between teats
- Teat caps easily unscrew to wash out feeder
- Galvanised hanging brackets to suit rail spacing
- UV stabilised poly for long outdoor use



Milk Test Buckets

CODE	CAPACITY (Litres)	DIMENSIONS	SEAL	LID & SEAL
PTB25	25	300 DIA x 490H	PTBS	PTBL25
PTB32	32	330 DIA x 510H	PTBS	PTBL32

KEY FEATURES

- Stainless steel handles
- Replacement Seals Available
- Pipe attachments to suit 5/8" or 3/4" tubing



Calf & Lamb Accessories

Accessories

CODE	DESCRIPTION
HL4	Hinged Lid 400mm for All MG40, MG50 & MG60 Calf Feeders
JWK	Jockey Wheel Kit - to suit Mobile Gravity Calf Feeder
MG2W	16" Wheel only for MG26 Calf Feeder (no axle)
MG4W	18" Wheel only for MG40, MM50, MG50 & Calf Feeder (no axle) each
MG4M	20 Teat manifold for MG40 Calf Feeder (Specify front or rear)
MG5M	25 Teat manifold for MG50 Calf Feeder (Specify front or rear)
MG6M	30 Teat manifold for MG60 Calf Feeder (Specify front or rear)
MGD1	Mud guards for single wheel calf feeders (Set of 2)
MGD2	Mud guards for tandem wheel calf feeders (Set of 2)
SL5	Screw lid - complete 355mm (suits RMT)



Teats and Caps

CODE	DESCRIPTION
PCT	Peach Teats
SCITP	Screw Cap with internal thread for Peach Teats
PCT/SC	Peach Calf Teat pulled through Screw Cap
LT	Lamb Teat
LT/BC	Lamb Teat through Bottle Cap
LT/SC	Lamb Teat through Screw Cap
SCL	Screw Caps for Lamb Teats
SCP	Screw Cap for Peach Teat



Brackets

CODE	DESCRIPTION
MM5BR	Brackets to suit MM5 and CF5 (Set of 2)
MM12BR	Brackets to suit MM8, MM12, MM13, CF12 & CF13 (Set of 2)
PT14BR	Set of Brackets to suit Fence Feeders PT14, PT15, PT48WB
PT49BR	Set of Brackets to suit PT49WB, PT50WB & PT02
PT02STBR	Set of wall Mount Brackets to suit PT02FS
PT03R	Galvanised Rack to suit PT03 Hayrack (Set of 2)



Farm Storage & Equipment



Bulka Bins

CODE	DESCRIPTION	CAPACITY (M ³)	DIMENSIONS (L x W x H)	LID
BB12	Galvanised frame	1.2	1200 x 1500 x 1600	BBLID
BB12XL	Galvanised frame - extended legs	1.2	1200 x 1500 x 2300	BBLID
BB16	Galvanised frame	1.6	1200 x 1500 x 1860	BBLID
BB16XL	Galvanised frame - extended legs	1.6	1200 x 1500 x 2560	BBLID

PRODUCT	BB12	BB16
Wheat & Meatmeal	960kg	1200kg
Barley	750kg	1000kg
Oats	600kg	800kg
Urea	876kg	1200kg
Lucerne	300kg	400kg
Calf & Pig Pellets	800kg	1050kg

KEY FEATURES

- All galvanised forklift frame - lifts on/off easily
- Stainless steel chute which is rodent and weather resistant
- Extended leg models allow for bag filling
- Suitable for grains, pellets and more



Lid



Handle



Flap

Farm Storage & Equipment



Silomaster / Cone Bottom Tanks

DRY OUTLET	LIQUID OUTLET	CAPACITY (Litres)	DIMENSIONS
SM5000D	SM5000L	5,000	2380DIA x 3030H
SM7500D	SM7500L	7,500	2380DIA x 3620H
SM10000D	SM10000L	10,000	2380DIA x 4210H
SM20000D	SM20000L	20,000	3450DIA x 4376H
SM25000D	SM25000L	25,000	3450DIA x 4923H
SM30000D	SM30000L	30,000	3450DIA x 5471H



Heavy Duty - Suitable to hold liquids up to 1.5SG

DRY OUTLET	LIQUID OUTLET	CAPACITY (Litres)	DIMENSIONS
SM5000D-1.5	SM5000L-1.5	5,000	2380DIA x 3530H
SM7500D-1.5	SM7500L-1.5	7,500	2380DIA x 4115H
SM10000D-1.5	SM10000L-1.5	10,000	2380DIA x 4705H
SM20000D-1.5	SM20000L-1.5	20,000	3450DIA x 4376H
SM25000D-1.5	SM25000L-1.5	25,000	3450DIA x 4923H
SM30000D-1.5	SM30000L-1.5	30,000	3450DIA x 5471H



Dry Feed Frame

CODE	CAPACITY (Litres)	DIMENSIONS
S MDF5000	5,000	2380DIA x 3525H
S MDF7500	7,500	2380DIA x 4115H
S MDF10000	10,000	2380DIA x 4705H



KEY FEATURES

- Sturdy galvanised steel frame and rust proof poly tank
- Rodent and weather proof
- Integrated forklift channels
- Screw lid

COLOUR RANGE



Liquid Outlet



Tank Frame Connection Pins

Farm Storage & Equipment


Dog Houses

CODE	DESCRIPTION	DIMENSIONS (L x W x H)	OPENING SIZE
TDD1	Dinkum Doghouse 1	1050 x 780 x 690	390 DIA
TDD3	Log Cabin Doghouse	1060 x 860 x 780	280 x 400

KEY FEATURES

- Cooler in summer, warmer in winter
- Rear venting to create airflow
- Hygienic - easily washed out

COLOUR RANGE

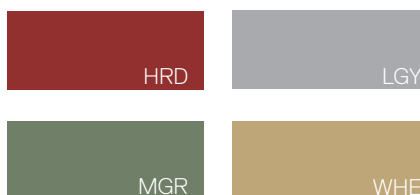


Vehicle Water Tanks

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)
HT28	Handi Tank only	28	415 x 240 x 380
HT28P	Handi Tank with mounting plate	28	415 x 240 x 380

KEY FEATURES

- 20mm tap for dispensing
- 20mm cap at top for easy filling

COLOUR RANGE

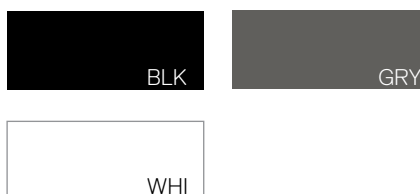

Tool Boxes

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)
BUC14	B'Ute Tool Box - Small	140	970 x 400 x 360
BUC26	B'Ute Tool Box - Large	266	1170 x 570 x 400
TBC20	Tradesman Box	200	980 x 390 x 600
TBC20FH	Tradesman Box + Friction Hinge	200	980 x 390 x 600

KEY FEATURES

- Flush mounted zinc hardware
- Raised weather resistant lid seal
- Removable internal tray included

COLOUR RANGE




Farm Storage & Equipment



CODE	DESCRIPTION	DIMENSIONS (L x W x H)
GS40	Grain Shovel	1100 H
GAB2	Grain Hopper (Auger Boot) Fits 4-10 inch-Auger	1100 x 1200 x 650



COLOUR RANGE - Shovel

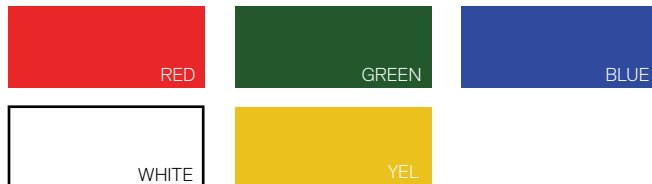


Produce Bins & Liners

CODE	DESCRIPTION	CAPACITY (Litres)	DIMENSIONS (L x W x H)	LID
PPB100	Produce Bin	1,000	1190 x 1190 x 1010	PPBL
PPB100FC	Produce Bin incl fork plates	1,000	1190 x 1190 x 1010	PPBL
PBL85	Liner Only	850	1110 x 1110 x 760	PBLD
PBL100	Liner Only	1,000	1110 x 1110 x 885	PBLD
PBL145	Liner Only	1,450	1110 x 1110 x 1200	PBLD
GBL	Grape Bin Liner	2,850	2170 x 1200 x 1100	GBLLIDN

KEY FEATURES - PPB100

- Stackable when full, nest them empty
- Optimum height for hand picking
- FEA analysis testing completed for strength
- Ideal pallet size for transporting
- Forklift access channels
- Food grade polyethylene

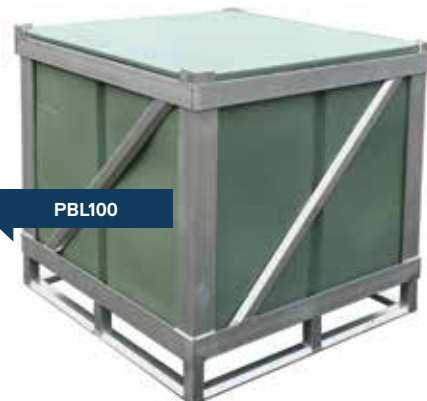

*Steel frames not included, only shown for illustrative purposes

Safety & Spill Containment

CODE	DESCRIPTION	DIMENSIONS (L x W x H)
IBCB1100	IBC Bund 1100L	1680 x 1680 x 700
LSS1	Lead safe stand	500 x 500 x 2100
PTC6	Drum top cover to suit 205ltr	600 x 600 x 300
BCL	Bollard Cover - Large	Ø200 x 1780H
BCS	Bollard Cover - Small	Ø120 x 1780H
BT1	Butt Tidy	Ø410 x 1000H
DSBAR	Bund-a-rack	1280 x 1280 x 280
DSDB2	Drumsafe two drum bund	1550 x 75 x 450
DSDP	Drumsafe Drumpak	Ø780 x 1080H
DSEP4	Drumsafe Econopallet 4 Drum	1210 x 1210 x 300
DSP	Drumsafe Bundled Pallet	1280 x 1280 x 335
DSST1	Splash Tray 1 Drum	830 x 830 x 100
DSST2	Splash Tray 2 Drum	1560 x 810 x 145
DSST4	Splash Tray 4 Drum	1210 x 1210 x 100



Order Form

T 03 5033 9000 E sales@polymaster.com.au W polymaster.com.au

Date: _____ Site Contact name: _____
 Distributor: _____ Delivery Address (if not to store): _____
 Distributor ID number: _____

 Phone: _____
 Contact name: _____ Email: _____
 Phone: _____ Order no. (required) _____

NO	PRODUCT CODE	DESCRIPTION	COLOUR	QTY	UNIT PRICE (EX.GST)
1					
2					
3					
4					
5					
				FREIGHT	
				TOTAL	

ADDITIONAL OPTIONS	SIZE REQUIRED	QTY	UNIT PRICE	AMOUNT
UPGRADE OUTLET? YES <input type="checkbox"/> NO <input type="checkbox"/>				
ADDITIONAL OUTLET? YES <input type="checkbox"/> NO <input type="checkbox"/>				
MANHOLE COVER INSTEAD OF STRAINER? <input type="checkbox"/>	MANHOLE COVER IN ADDITION TO STRAINER? <input type="checkbox"/>			
ACCESSORIES REQUIRED? YES <input type="checkbox"/> NO <input type="checkbox"/>				

FILL IN ADDITIONAL DETAILS BELOW FOR TANK ORDERS ONLY - SELECT FITTING POSITIONS

Outlet: _____

Overflow: _____

Outlet: _____

Overflow: _____

Outlet: _____

Overflow: _____

* Minimum order \$300
 * Tank specs available at polymaster.com.au

Email to sales@polymaster.com.au to place your order

Disclaimer: Colours and sizes may vary from details printed

Delivery & Installation

It is the owner's responsibility to provide clear access to site, and to secure tank/s left at site.

If the driver cannot reach the location, the tank/s will be left at the closest practical & safe position at the driver's discretion. If a tank can not be left at site, the owner will incur a redelivery charge.

All products can be delivered throughout Australia. Call us for a quote for deliveries outside nominated zones.

Nominated Zones Free Delivery

Polymaster offers free delivery to site throughout most of Victoria, South Australia and parts of Southern New South Wales for tanks exceeding 13,000ltrs (remote areas excluded). Please refer to our free delivery zone map on polymaster.com.au/delivery-installation.

All tanks less than 13,000ltrs are delivered free to store (within the nominated zone). A delivery fee will be incurred to deliver these tanks to site.

Delivery Requirements

Clearance required for truck and trailer is 19m long, 5m high, 3.5m wide. To put this into perspective, our trucks are longer than a semi-trailer.

The good news is that no-one is required to help the driver unload. Please provide free and easy access to your site and an identified 'marked' area for the tank to be unloaded. Our driver will unload as close as possible to your desired location.

If the driver deems the desired location to be too difficult to manoeuvre the truck into, the driver will identify a safe and secure place to unload within your property.

Please note: The driver is unable to physically position the tank onto the 'pad'. Exact positioning of the tank on the pad remains the responsibility of the property owner.

Note:

- It is the Owners responsibility to position the tank on the pad and to connect the tank.
- Please refer to lifting instructions (Polymaster.com.au/delivery-installation) for tanks greater than 25,000ltrs as lifting equipment will be required to position on the pad by the Owner.

Underground and Septic Tanks will require a lifting device (forklift etc) to unload from the truck. This is not supplied by the driver.

Re-Scheduling Fee

Please be advised that if the Owner chooses to change the delivery date, a re-scheduling fee will be incurred.

Installation Guide

Entry to tank is not required when installing a Polymaster tank!

The tank site must be firm, level and flat.

A concrete pad (min dia. of tank), or well compacted sand base or other consolidated fill such as crushed dust is recommended. This fill must be free of any rocks, stones or any sharp objects.

The sand base or other consolidated fill base must be 75mm – 100mm deep and at least 600mm larger in diameter than the tank base. The outside of the base must be supported by a retaining wall to prevent erosion.

The overflow must be piped well clear of the tank to avoid any undermining of the tank base.

Ensure that a flexible hose of at least 300 mm (12") is installed after the tank valve to absorb any shocks or movement.

If tank is placed on a stand, support pipework off the stand, never support pipework off the tank.



Note: Failure to properly install tank as per instructions will void warranty. Never enter a tank alone. Have an attendant stand by. Restricted Space - only enter after carrying out a Hazard Identification Risk Assessment (H.I.R.A.).

Index

PRODUCT CODE	PAGE
A	
AFV0L	49
AFV2	49
AFV2L-A	14
AFV2LB	12, 14
AFV2SEAL	49
AFV3B	49
AFV4B	49
AFV5B	49
AFV6	49
AFV6L	49
ATN65	27
ATN90	27
B	
B12KP-P	32
B12V-COMET	32
B12VP-P	32
B55H	35, 38
B65HT	36, 37, 38
B65HTES	36, 37, 38
BATN-P	32
BB12	58
BB12XL	58
BB16	58
BB16XL	58
BCL	62
BCS	62
BDM-P	32
BDRHP-P	32
BFK	38
BM35TNB-RES	27
BM100-B	32
BM200B-P12	32
BM400B-P12	32
BMCB-A	32
BMCB-D	27
BMDS2300	30
BMDS3300	30
BMDS5000	30
BMDS7000	30
BMDS10000	30
BMHR8-P	32
BMLI	32
BMS2000RPB	31
BMS4000RPB	31
BMS5000RPB	31
BMS7000RPB	31
BMS10000RPB	31

PRODUCT CODE	PAGE
BMSL2000RPB	31
BMSL3000RPB	31
BMSL5000LGY-C	32
BMSL5000RPB	31
BMTN-P	32
BSFMS	27
BSLT2020H4	9
BSLT2020H5	9
BSLT2020PC	9
BT1	62
BUC14	60
BUC26	60
C	
CFA1	14
CFA2	14
CFAC	14
CFANT	14
CFS1	14
CFS2	14
CFT8	48
CFT8E	48
CLG	13
CLG-D	26, 27
CUBE56-12V	25
CUBE70-240V	25
D	
DC2	49, 50, 51
DC3	44, 45, 46, 49
DC3SE	49
DCF25	27
DCF25CL	27
DCF25CLF	27
DCF25F	27
D-CONNECT2KIT	27
DCSE	49, 51
DFG100	26
DFG200	26
DFG400	26
DFG600	26
DFG800	26
DH2020-4M	27
DH2020-6M	27
DH2025-4M	27
DH2025-6M	27
DHJ600	15
DHJ800	15
DHR10M25	27
DM100MF	32

PRODUCT CODE	PAGE
DM200MF	32
DM400MF	32
DM400QBUND	27
DM1200	23
DM1200-S	23
DM2000	23
DM2000-S	23
DM3000	23
DM3000-S	23
DMDS2300	20
DMDS3300	20
DMDS5000	20
DMDS7000	20
DMDS10000	20
DMDT	26
DMDT-UTE	26
DMFC	27
DMLI	27
DMM4	26
DMP100E	22
DMP200E	22
DMP400E	22
DMP600E	22
DMP1200-240V	23
DMP1200-S	23
DMP2000-240V	23
DMP2000-S	23
DMP3000-240V	23
DMP3000-S	23
DMPD1200	23
DMPD2000	23
DMPD3000	23
DMPF1200	23
DMPF2000	23
DMPF3000	23
DMPFT1200	24
DMPFT2000	24
DMPQ400E	22
DMPQB400E	22
DP2	46, 47, 49
DP4B	49
DP50K	26
DP50PUMP	22
DP50PUMP12-ASY	23
DP50PUMP12V-ASY	26
DP72KA	25
DP72PUMP	23, 26
DP85K	26

PRODUCT CODE	PAGE
DP85PUMP	26
DP85PUMP12V	23
DP1224K	26
DP1224PUMP	26
DP1224PUMP12V	23
DPK1	13
DPK1EXT	13
DPM	26
DPSE	49
DSBAR	62
DSDB2	62
SDSP	62
DSEP4	62
DSN20K	36
DSP	62
DSST1	62
DSST2	62
DSST4	62
DSW4500	21
DSW4500+DK-12V	21
DSW4500+DK-240V	21
DSW6500	21
DSW6500+DK-12V	21
DSW6500+DK-240V	21
DSW9500	21
DSW9500+DK-12V	21
DSW9500+DK-240V	21
FCV	27
FFDPTES	37, 38
FFHR1	38
FFS800-1200	36
FFS2000	36
FHR	38
FHRC36	38
FHRC50	38
FLBF	56
FRB	54
FSB200	51
FT200	43
FT500B	43
FT1000B	43
FT2000B	42, 43
FT5000B	42, 43
FT9000B	42, 43, 65
FTL2000	42, 43
FTR200	34
FTR400	34
FTR600-S	34

Index

PRODUCT CODE	PAGE
FTR600U	34
FTR800-S	34
FTR800U	34
FTR1200-S	34
FTR2000-S	34
FTR3000-S	34
FTRC200-25	35
FTRC200-55	35
FTRC400-25	35
FTRC400-55	35
FTRC400-55-HR	35
FTRC600-55	35
FTRC600-55-HR	35
FTRC800-55	35
FTRC800-55-HR	35
FTRS600	36
FTRS600ES	36
FTRS800	36
FTRS800ES	36
FTRS1200	36
FTRS1200ES	36
FTRS2000	36, 37
FTRS2000ES	36
FTRT1200-S	37
FTRT1200TESD-S	37
FTRT1200TES-S	37
FTRT2000ESD-S	37
FTRT2000ES-S	37
FTRT2000-S	37
G	
GAB2	61
GBL	61
GS40	61
H	
HHR-370PC	15
HHR-370S-PC	15
HL4	57
HSJ1000	15
HSP	51
HT28	60
HT28P	60
HTP750VR	42
I	
IBCB1100	62
IRS32	14
IRS40	14
J	
JFV20	49

PRODUCT CODE	PAGE
JOS90	13
JWK	57
L	
LFT50KL	41
LFT9000	41
LFT13600	41
LFT22500	41
LFT31700	41
LFTSDT23000	40
LFTSDT28000	40
LFTSDT33000	40
LGSO	13
LH03SS	41
LHO1	14
LHO1.5	14
LHO1.5SS	14
LHO1.25	14
LHO1.25SS	14
LHO1SS	14
LHO2	14
LHO2.5	14
LHO2SS	14
LHO3	14
LHO4	14
LQ01	14
LSS1	62
LT	56, 57
LT01	13
LT/BC	56, 57
LT/SC	56, 57
LWD	13
M	
MB25L	35, 38
MBL	56
MBP	53
MCBKEYS	27
MCBKEYS-RED	27
MCBPCIF	27
MCBSW	27
MG2W	57
MG4M	55, 57
MG4W	57
MG5M	55, 57
MG6M	55, 57
MG40P	55
MG50LTAP	55
MG50P	55
MG50TAP	55
MG60P	55

PRODUCT CODE	PAGE
MG400T	55
MG800T	55
MGD1	55
MGD2	55
MHC1	55
MHC3	55
MHC4	55
MHC5	55
MHC6	13
MHC8	9, 10, 13
MHC9	10, 13
MHCA	13
MHR20-370	9, 15
MHR20-550	9, 15
MM1L	56
MM1P	53
MM5BR	53, 56, 57
MM5L	56
MM5P	53
MM8L	56
MM8P	53
MM12BR	53, 56, 57
MM12L	56
MM12P	53
MM13L	56
MM13P	53
MMT400	55
MOL50KL	52
MOL13600	52
MOL22500	52
MOL31700	52
MT2	44, 49
MT6	44, 49
MT12	44, 49
MT24	44
MT45	44, 49
MTFC	44, 49
MTP110	55
O	
OFF9	13
OFF10	13
OFFP	13
OS9	13
P	
PBL85	61
PBL100	61
PBL145	61
PC01	13
PCR2000	8

PRODUCT CODE	PAGE
PCR4000	8
PCR5000	8
PCR7000	8
PCR10000	8
PCR13500	8
PCR22500	8
PCR27000	8
PCST600	10
PCST1050	10
PCST1050AP	10
PCST1050GPS	10
PCST2000	10
PCST2000AP	10
PCST2000GPS	10
PCST3000	10
PCST3000AP	10
PCST3000GPS	10
PCST5000	10
PCST5000AP	10
PCST5000GPS	10
PCT	53, 57
PCTL12	46
PCTL24	46
PCT/SC	57
PH400	15
PH550	15
PHGPS	15
PLT50KL	12
PLT9000	12
PLT13600	12
PLT22500	12
PLT31700	12
PLTIP25	14
PLTIP40	14
POB20	51
PPB100	61
PPB100FC	61
PSC	51
PT02	50, 57
PT02FS	50, 57
PT02STBR	50, 57
PT03	50, 57
PT03R	50, 57
PT04WC	50, 51
PT05	52
PT05C	52
PT05R	52
PT10W	45
PT11W	45
PT12W	45

Index

PRODUCT CODE	PAGE
PT13W	45
PT14	50, 57
PT14BR	50, 57
PT15	50, 57
PT48W	50, 51
PT48WB	50, 57
PT49BR	50, 57
PT49W	49, 50, 51
PT49WB	50, 57
PT50W	49, 50, 51
PT50WB	50, 57
PT90W	50
PT2132	14
PT2140	14
PT2150	14
PTB25	56
PTB32	56
PTC6	62
PTC36F	48
PTC37F	48
PTF18	50
PTM31F	48
PTM31W	46, 49
PTM32F	48
PTM32W	46, 49
PTM33F	48
PTM33W	46, 49
PTM34F	48
PTM34W	46, 49
PTMFC	46, 49
PTWK7	51
R	
R10112	13
RFRB	54
RFS	14
RFS2	14
RMT	55, 57
RWT50KL	6
RWT200	6, 13
RWT600	6, 13
RWT1000	6, 13
RWT1600	6, 13
RWT2270LP	6
RWT2270T	6, 13
RWT3300	6, 13
RWT4500LP	6
RWT4500T	6
RWT5000	6, 7
RWT7100	6

PRODUCT CODE	PAGE
RWT9000	6, 7
RWT13600	6, 7
RWT22500	6
RWT31700	6
S	
S2	6, 14
S3	8, 10, 14
S4	8, 9, 10, 14
S5	8, 14
SC80-F	41
SCITP	57
SCL	57
SCP	57
SL5	57
SM5000D	59
SM5000D-1.5	59
SM5000L	59
SM5000L-1.5	59
SM7500D	59
SM7500D-1.5	59
SM7500L	59
SM7500L-1.5	59
SM10000D	59
SM10000D-1.5	59
SM10000L	59
SM10000L-1.5	59
SM20000D	59
SM20000D-1.5	59
SM20000L	59
SM20000L-15	59
SM25000D	59
SM25000D-1.5	59
SM25000L	59
SM25000L-1.5	59
SM30000D	59
SM30000D-1.5	59
SM30000L	59
SM30000L-1.5	59
SMDF5000	59
SMDF7500	59
SMDF10000	59
SPK	27
SPT5	46, 49
SPT9	46, 49
SPT12	46, 49
SPTA	46, 49
SPTAL	46, 49
SSBV1	14
SSBV1.5	14

PRODUCT CODE	PAGE
SSBV1.25	14
SSBV2	14
SSBV3	14, 41
SSBV4	14
ST3100	17
ST4550	17
STBOXBASIC	25
STBOXMETER12V	25
STBOXPRO	25
STLIDHGR	17
STMETER12V	25
STMETER240V	25
STRUT430MM-200N	27
SWP250	47, 49
SWP250-40	47, 49
SWP250FC	47, 49
SWP450	47, 49
SWP450-40	47, 49
SWP450-50	47, 49
SWP450FC	47, 49
SWT15	45, 49
SWT4500	45, 49
SWTC	49
T	
TBC20	60
TBC20FH	60
TDD1	60
TDD3	60
TFFK	38
TIF3	13
TIF4	13
U	
URRM	11, 13, 17
URT3300B	11
URT3300VF	11
URT3300VF/GP	11
URT3300VF/PC	11
URT5000B	11
URT5000VF	11
URT5000VF/GP	11
URT5000VF/PC	11
URTL	11, 13
URVF01	13
URVF15	13
URVF30	13
URVFR	13
URVFWM	13

PRODUCT CODE	PAGE
W	
WFV1	14
WFV2	14
WFV3	14



Together we
hold the future.

→ 1800 062 064
→ polymaster.com.au

Follow us: Polymaster Group

Version 1.3

